


# .100" (2.54 mm) SIL Crimp Receptacles With Back Polarizing Rib

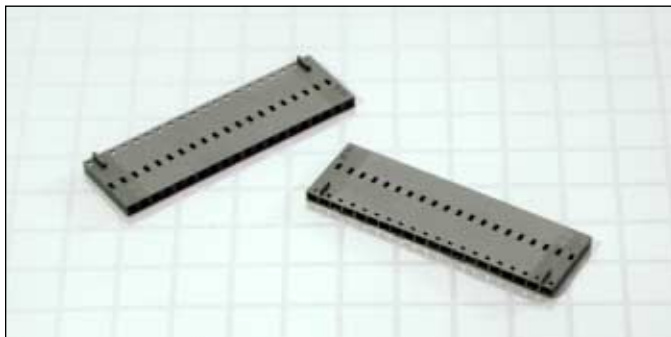

## 9300 Series "Post/Boxe"

PART NUMBER LEGEND





9300-1XX

NUMBER OF POSITIONS  
(SEE TABLE I)

Mates with 9100 Series Headers

**NOTES:**

- 1) ALL DIMENSIONS ARE SHOWN AS INCHES/(MM).
- 2) HOUSING MATERIAL: POLYESTER, GLASS FILLED, COLOR IS BLACK, UL 94V-0
- 3) THIS HOUSING ACCEPTS 940X-6XX CRIMP TERMINALS.

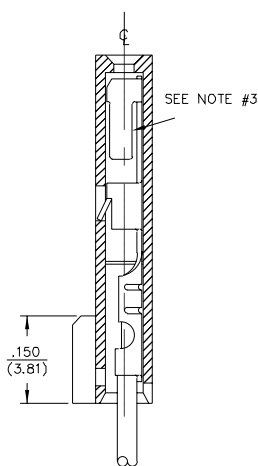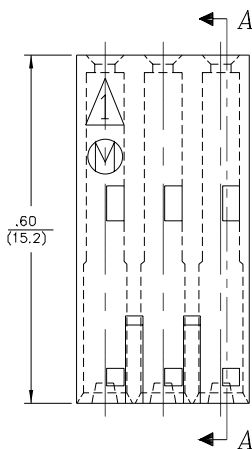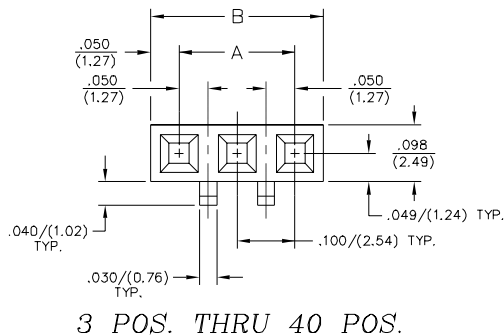

**SECTION "A-A"**

WITH WIRE CRIMPED AND CONTACT SEATED INTO INSULATOR

**TABLE 1**

PART NUMBER	No. OF CKTS.	DIM "A"	DIM "B"
9300-102	2	.100/(2.54)	.20/(5.1)
↑ -103	3	.200/(5.08)	.30/(7.6)
-104	4	.300/(7.62)	.40/(10.2)
-105	5	.400/(10.16)	.50/(12.7)
-106	6	.500/(12.70)	.60/(15.2)
-107	7	.600/(15.24)	.70/(17.8)
-108	8	.700/(17.78)	.80/(20.3)
-109	9	.800/(20.32)	.90/(22.9)
-110	10	.900/(22.86)	1.00/(25.4)
-111	11	1.000/(25.40)	1.10/(27.9)
-112	12	1.100/(27.94)	1.20/(30.5)
-113	13	1.200/(30.48)	1.30/(33.0)
-114	14	1.300/(33.02)	1.40/(35.6)
-115	15	1.400/(35.56)	1.50/(38.1)
-116	16	1.500/(38.10)	1.60/(40.6)
-117	17	1.600/(40.64)	1.70/(43.2)
-118	18	1.700/(43.18)	1.80/(45.7)
-119	19	1.800/(45.72)	1.90/(48.3)
-120	20	1.900/(48.26)	2.00/(50.8)
-121	21	2.000/(50.80)	2.10/(53.3)
-122	22	2.100/(53.34)	2.20/(55.9)
-123	23	2.200/(55.88)	2.30/(58.4)
-124	24	2.300/(58.42)	2.40/(61.0)
-125	25	2.400/(60.96)	2.50/(63.5)
-126	26	2.500/(63.50)	2.60/(66.0)
-127	27	2.600/(66.04)	2.70/(68.6)
-128	28	2.700/(68.58)	2.80/(71.1)
-129	29	2.800/(71.12)	2.90/(73.7)
-130	30	2.900/(73.66)	3.00/(76.2)
-131	31	3.000/(76.20)	3.10/(78.7)
-132	32	3.100/(78.74)	3.20/(81.3)
-133	33	3.200/(81.28)	3.30/(83.8)
-134	34	3.300/(83.82)	3.40/(86.4)
-135	35	3.400/(86.36)	3.50/(88.9)
-136	36	3.500/(88.90)	3.60/(91.4)
-137	37	3.600/(91.44)	3.70/(94.0)
-138	38	3.700/(93.98)	3.80/(96.5)
↑ -139	39	3.800/(96.52)	3.90/(99.1)
9300-140	40	3.900/(99.06)	4.00/(101.6)

ADDITIONAL SPECIFICATIONS

MATING CONTACT

APPLICATION TOOLING