

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.45kg min.

Insertion Force: 420g max.

Withdrawal Force: 28g min.

Electrical

Voltage Rating: 250V

Current Rating: 3.0A

Dielectric Withstanding Voltage: 750V AC

Insulation Resistance: 1000M

Physical

Housing: Thermoplastic, UL 94V-0 rated

Contact: Copper alloy


Plating: See "ORDERING INFORMATION"

Operating Temperature: -40 °C to +105 °C


Jumper Connector

SJ05 Series

2.54mm [.100"] Pitch



DRAWING

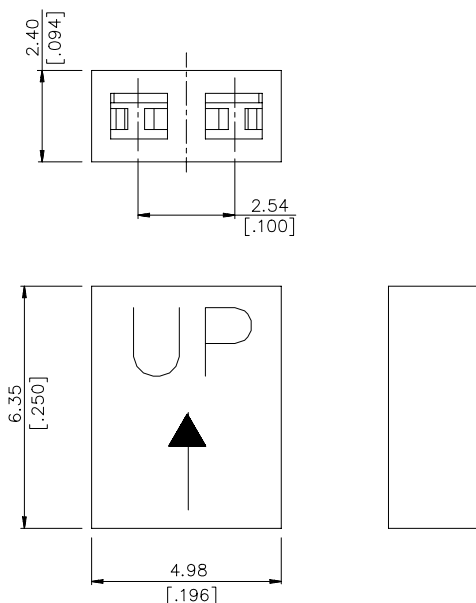

ORDERING INFORMATION

PRODUCT NO.: S J 0 5 2 0 * - A *

Socket	_____	Modification Code A0=Color Black A1=Color Blue A2=Color Green A3=Color Yellow A4=Color Red A5=Color White
Jumper	_____	
Termination & Contact Type	_____	
2.54 mm. Center Line	_____	
0=Loose Piece	_____	
Contact Area Plating	_____	
1=Gold Flash		
7=15u" Gold		
F=Gold Flash With Lead Free		
V=15u" Gold With Lead Free		