

LM148, LM248, LM348 QUADRUPLE OPERATIONAL AMPLIFIERS

SLOS058B – OCTOBER 1979 – REVISED AUGUST 1996


- μ A741 Operating Characteristics
- Low Supply Current Drain . . . 0.6 mA Typ (per amplifier)
- Low Input Offset Voltage
- Low Input Offset Current
- Class AB Output Stage
- Input/Output Overload Protection
- Designed to Be Interchangeable With National LM148, LM248, and LM348

description


The LM148, LM248, and LM348 are quadruple, independent, high-gain, internally compensated operational amplifiers designed to have operating characteristics similar to the μ A741. These amplifiers exhibit low supply current drain, and input bias and offset currents that are much less than those of the μ A741.

The LM148 is characterized for operation over the full military temperature range of -55°C to 125°C , the LM248 is characterized for operation from -25°C to 85°C , and the LM348 is characterized for operation from 0°C to 70°C .


symbol (each amplifier)

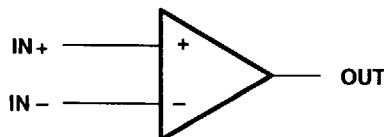

LM148 . . . J PACKAGE
LM248, LM348 . . . D, N, OR PW PACKAGE
(TOP VIEW)



LM148 . . . FK PACKAGE
(TOP VIEW)

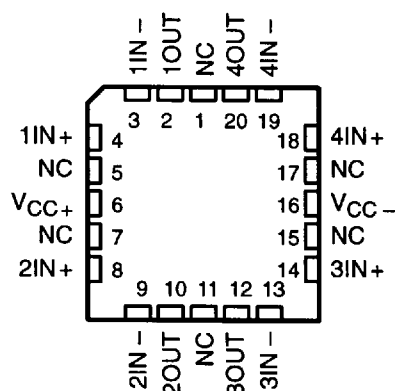

NC – No internal connection

AVAILABLE OPTIONS

T _A	V _{IO} max AT 25°C	PACKAGE				
		SMALL OUTLINE (D)	CHIP CARRIER (FK)	CERAMIC DIP (J)	PLASTIC DIP (N)	TSSOP (PW)
0°C to 70°C	6 mV	LM348D	—	—	LM348N	LM348PW
-25°C to 85°C	6 mV	LM248D	—	—	LM248N	—
-55°C to 125°C	5 mV	—	LM148FK	LM148J	—	—

The D package is available taped and reeled. Add the suffix R to the device type (e.g., LM348DR).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1996, Texas Instruments Incorporated

8961724 0103641 395

LM148, LM248, LM348 QUADRUPLE OPERATIONAL AMPLIFIERS

SLOS058B – OCTOBER 1979 – REVISED AUGUST 1996

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

	LM148	LM248	LM348	UNIT	
Supply voltage, V_{CC+} (see Note 1)	22	18	18	V	
Supply voltage, V_{CC-} (see Note 1)	-22	-18	-18	V	
Differential input voltage, V_{ID} (see Note 2)	44	36	36	V	
Input voltage, V_I (either input, see Notes 1 and 3)	± 22	± 18	± 18	V	
Duration of output short circuit (see Note 4)	unlimited	unlimited	unlimited		
Continuous total power dissipation	See Dissipation Rating Table				
Operating free-air temperature range, T_A	-55 to 125	-25 to 85	0 to 70	$^{\circ}\text{C}$	
Storage temperature range	-65 to 150	-65 to 150	-65 to 150	$^{\circ}\text{C}$	
Case temperature for 60 seconds	FK package	260		$^{\circ}\text{C}$	
Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds	J package	300		$^{\circ}\text{C}$	
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	D, N, or PW package		260	260	$^{\circ}\text{C}$

- NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between V_{CC+} and V_{CC-} .
 2. Differential voltages are at $IN+$ with respect to $IN-$.
 3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or the value specified in the table, whichever is less.
 4. The output may be shorted to ground or either power supply. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^{\circ}\text{C}$ POWER RATING	DERATING FACTOR	DERATE ABOVE T_A	$T_A = 70^{\circ}\text{C}$ POWER RATING	$T_A = 85^{\circ}\text{C}$ POWER RATING	$T_A = 125^{\circ}\text{C}$ POWER RATING
D	900 mW	7.6 mW/ $^{\circ}\text{C}$	32 $^{\circ}\text{C}$	611 mW	497 mW	N/A
FK	900 mW	11.0 mW/ $^{\circ}\text{C}$	68 $^{\circ}\text{C}$	878 mW	713 mW	273 mW
J	900 mW	11.0 mW/ $^{\circ}\text{C}$	68 $^{\circ}\text{C}$	878 mW	713 mW	273 mW
N	900 mW	9.2 mW/ $^{\circ}\text{C}$	52 $^{\circ}\text{C}$	734 mW	596 mW	N/A
PW	700 mW	5.6 mW/ $^{\circ}\text{C}$	N/A	448 mW	N/A	N/A

recommended operating conditions

	MIN	MAX	UNIT
Supply voltage, V_{CC+}	4	18	V
Supply voltage, V_{CC-}	-4	-18	V



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

LM148, LM248, LM348 QUADRUPLE OPERATIONAL AMPLIFIER

SLOS058B - OCTOBER 1979 - REVISED AUGUST 1996

electrical characteristics at specified free-air temperature, $V_{CC} = \pm 15$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	LM148			LM248			LM348			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO} Input offset voltage	$V_O = 0$ 25°C	1	5	6	1	1	6	1	1	6	mV
I_{IO} Input offset current	Full range			6			7.5			7.5	
	25°C	4	25	50	4	4	50	4	4	50	nA
I_{IB} Input bias current	Full range			75			125			100	
	25°C	30	100	200	30	30	200	30	30	200	nA
V_{ICR} Common-mode input voltage range	Full range			325			500			400	
	25°C	± 12			± 12			± 12			V
VOM Maximum peak output voltage swing	$R_L = 10$ k Ω	± 12	± 13		± 12	± 13		± 12	± 13		V
	$R_L \geq 10$ k Ω	± 12			± 12			± 12			
	$R_L = 2$ k Ω	± 10	± 12		± 10	± 12		± 10	± 12		
	$R_L \geq 2$ k Ω	± 10			± 10			± 10			
A _{VD} Large-signal differential voltage amplification	$V_O = \pm 10$ V, $R_L \geq 2$ k Ω	50	160		25	160		25	160		V/mV
	25°C	25			15			15			
r_i Input resistance‡	25°C	0.8	2.5		0.8	2.5		0.8	2.5		M Ω
B_1 Unity-gain bandwidth	A _{VD} = 1	1			1			1			MHz
ϕ_{PM} Phase margin	A _{VD} = 1	60°			60°			60°			
CMRR Common-mode rejection ratio	$V_{IC} = V_{ICRmin}$, $V_O = 0$	70	90		70	90		70	90		dB
	25°C	70			70			70			
k _{SVR} Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm} = \pm 9$ V to ± 15 V, $V_O = 0$	77	96		77	96		77	96		dB
	25°C	77			77			77			
I _{OS} Short-circuit output current		± 25			± 25			± 25			mA
I _{CC} Supply current (four amplifiers)	No load										mA
	$V_O = 0$ $V_O = V_{OM}$	2.4	3.6		2.4	4.5		2.4	4.5		
V_{O1}/V_{O2} Crosstalk attenuation	f = 1 Hz to 20 kHz	120			120			120			dB

† All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. Full range for T_A is -55°C to 125°C for LM148, -25°C to 85°C for LM248, and 0°C to 70°C for LM348.
‡ This parameter is not production tested.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

8961724 0103643 168

LM148, LM248, LM348 QUADRUPLE OPERATIONAL AMPLIFIERS

SLOS058B – OCTOBER 1979 – REVISED AUGUST 1996

operating characteristics, $V_{CC\pm} = \pm 15\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SR	Slew rate at unity gain	$R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, See Figure 1		0.5		$\text{V}/\mu\text{s}$

PARAMETER MEASUREMENT INFORMATION

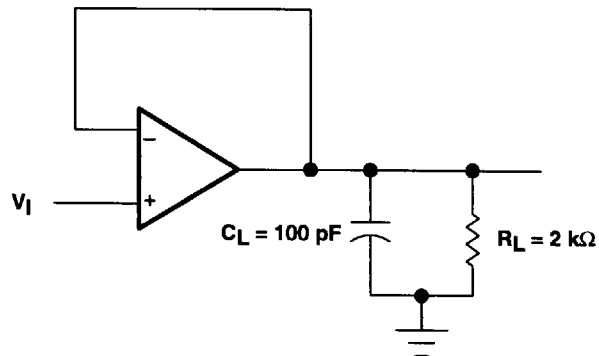


Figure 1. Unity-Gain Amplifier

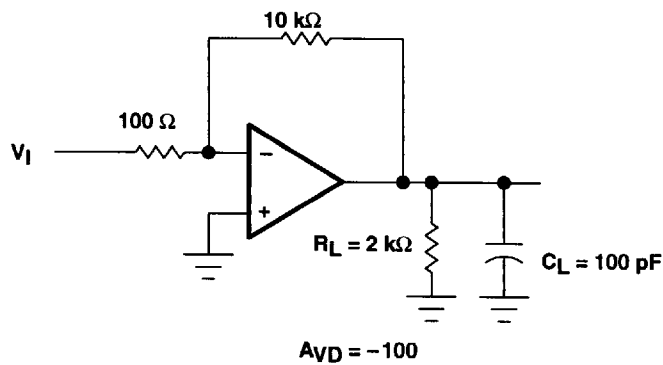


Figure 2. Inverting Amplifier