


Pin Header 3,96 mm

Series

578

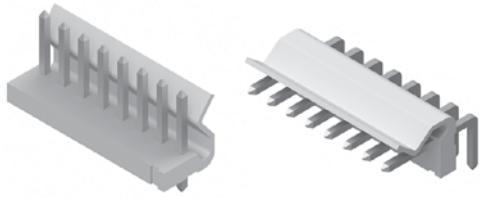


Rated current	5,0 A
Rated voltage	250 V _{RMS} / V _{DC}
Withstand voltage	1500 V _{RMS} for one minute
Material contact	Brass
Material insulator	PA 6.6, UL94V-0
Operating temperature	-25°C to +85°C
Max. processing temper.	230°C for 5 seconds

pitch	3,96
termination	
contact size	□ 1,14
max. pincount	020


All dimensions in mm.

Product group
3

Variation





1




2

PCB Layout



no. of pins	see figure left	see figure left	available in variation	
n	A	B		
002	7,92	3,96	1	2
003	11,88	7,92	1	2
004	15,84	11,88	1	2
005	19,80	15,84	1	2
006	23,76	19,80	1	2
007	27,72	23,76	1	2
008	31,68	27,72	1	2
009	35,64	31,68	1	2
010	39,60	35,64	1	2
011	43,56	39,60	1	2
012	47,52	43,56	1	2
013	51,48	47,52	1	2
014	55,44	51,48	1	2
015	59,40	55,44	1	2
016	63,36	59,40	1	2
017	67,32	63,36	1	2
018	71,28	67,32	1	2
019	75,24	71,28	1	2
020	79,20	75,24	1	2

Plating:
T = Sn



www.mpe-connector.de

Order code:

578-?-?-??-0-T-BS0

Mating series 577
see page