

# 1.27mm × 2.54mm (0.05" × 0.1") Pin Header

Dual Row 06 to 100 Contacts  
Right Angle




0073D Series

## APPLICATION AND FEATURES


- 0073D series headers are ideal for board stacking application.
- A Choice of 2 terminal lengths for mating with 0052D & 0053D series P.C Board connector to achieve space saving from 6.3mm to 14.5mm.
- Notches for easy breakable.

## SPECIFICATIONS

Current Rating: 1 Amp  
 Insulator resistance: 5000 Megohms min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40° to +105°C  
 Max Processing Temp: 230° for 30~60 seconds  
 (260° for 10 seconds)  
 Contact Material: Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0  
 ©Standard: Nylon-6T

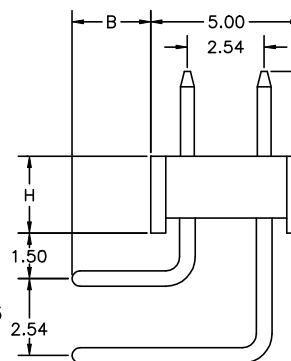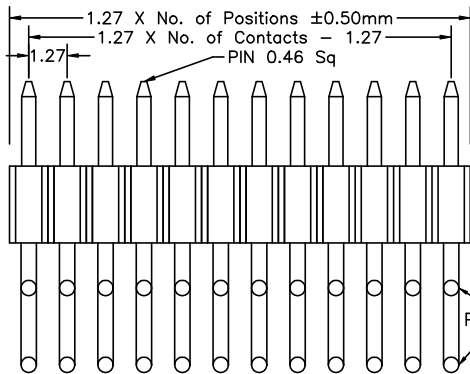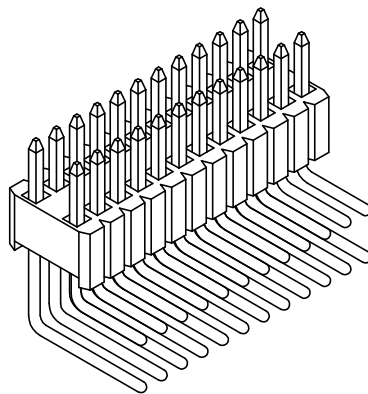

Recommended P.C.Board  
Hole Layout



## Order Information 0073D Series

Example: 0073D-20-R1-02-A/B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
0073D	06 to 100 Contacts	Plastic Height 2.54mm Base	Tin Plated 01 Gold Plated Flash 02 10 $\mu$ " 10 30 $\mu$ " 30	A B 2.8 2.6 For 0052D 6.0 2.6 For 0053D
		R1		