




Pin Header 2.0mm 1 Row H=1.5/2.0mm Right Angle Type

Specifications


Current Rate: 2.0 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0
 ©Standard: PBT or Nylon 6T
 Terminal: Copper Alloy
 Plating: Gold Plated

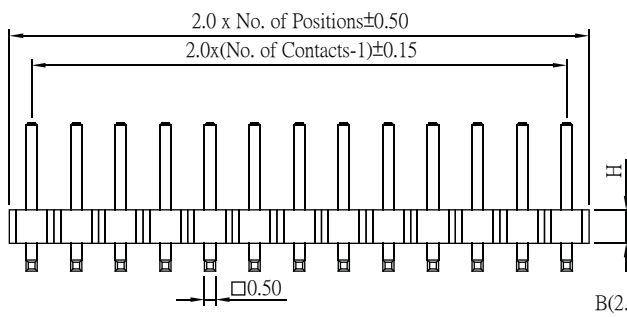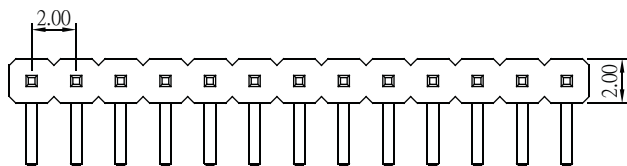



	Dim. C
H=1.5mm	2.50
H=2.0mm	3.00




Part No.: PH2R15/20-1XX-L/U

Pin Header 2.0mm 2 Row H=1.5/2.0mm Right Angle Type

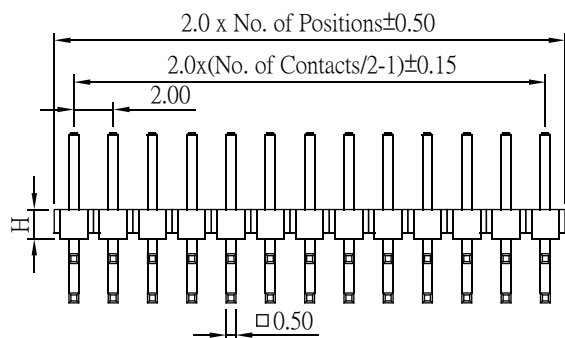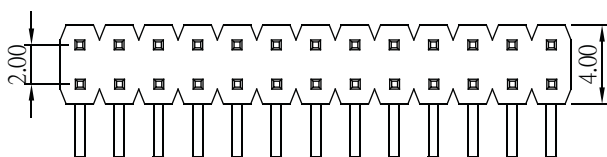

	Dim. C
H=1.5mm	2.50
H=2.0mm	3.00

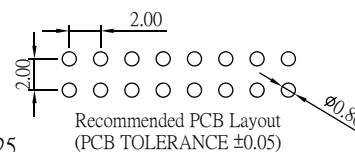

Part No.: PH2R15/20-2XX-L/U

ORDER INFORMATION

