


3016 Series

I.D.C. Plug 2.54mm(0.100")

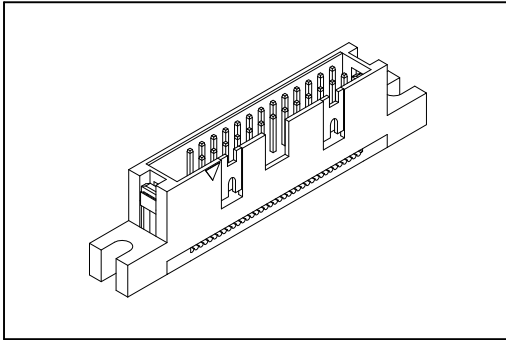

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 500V.

Insulator Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.

Operating Temperature: -55°C~+105°C.


Features:

* Fully shrouded provides ultimate reliability.

* With polarization.

* Mounting ears optional.

Mates with: 1001,2046.

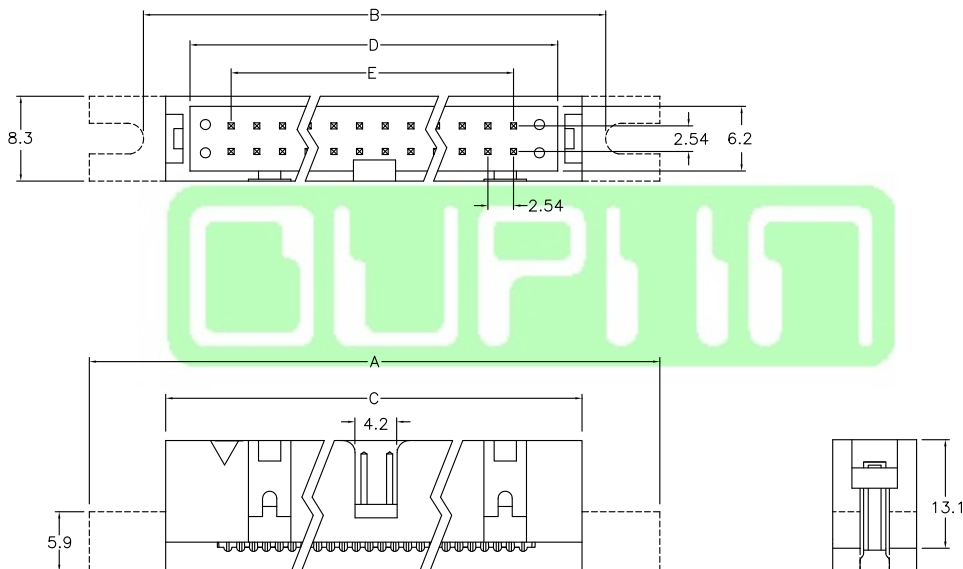

Position	Dimension				
	A	B	C	D	E
10	38.00	27.94	22.98	17.93	10.16
14	43.08	33.02	28.10	22.93	15.24
16	45.70	35.56	30.64	25.55	17.76
20	50.70	40.64	35.70	30.56	22.86
26	58.26	48.26	43.26	38.20	30.48
30	63.34	53.34	48.44	43.40	35.56
34	68.40	58.42	53.28	48.30	40.64
40	76.14	66.04	60.96	56.06	48.26
50	88.82	78.74	73.72	68.70	60.96
60	101.38	91.44	86.44	81.34	73.66
64	106.80	96.52	91.46	86.43	78.74

Ordering information

<u>3016-</u>	<u>64</u>	<u>C</u>	<u>00</u>	<u>Y</u>	<u>1</u>	<u>1</u>	<u>A</u>
Series	No. of Pin Count	C: Selective Gold Plated	00: G/F	Y: Grey B: Black	1: With Mounting Ears 2: Without Mounting Ears	1: With Strain Relief 2: Without Strain Relief	A: Tray Package

* Standard color grey and maybe subject to minimum quantity request for color black.

Information including designs, specifications and components may be changed or updated without notice.