

### 1.0 Features


- Uses inexpensive fundamental-mode crystals
- Integrated phase-locked loops (PLL) multiply crystal frequency to the higher system frequencies needed
- 3.3V or 5V supply voltage available
- Small circuit board footprint (8-pin 0.150" SOIC)
- Custom frequency selections available - contact your local AMI Sales Representative for more information

### 2.0 Description

The FS6206 is a monolithic CMOS clock generator IC designed to minimize cost and component count.

An on-chip crystal oscillator generates the reference frequency and two phase-locked loops are used to generate precise output / reference frequency ratios. See Table 1 for information on the frequency ratios programmed into each version of the FS6206.

**Figure 1: Pin Configuration**

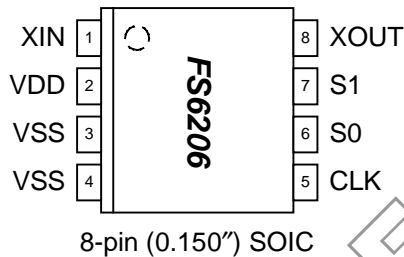


**Table 1: Version Information**

DEVICE	VDD	F <sub>REF</sub> (MHz)	S1	S0	CLK (MHz)
FS6206-01	5.0	14.318182	0	0	0.0000 (Stopped Low)
			0	1	162.5239 (F <sub>REF</sub> * 647 / 57)
			1	0	173.2151 (F <sub>REF</sub> * 496 / 41)
			1	1	173.2343 (F <sub>REF</sub> * 1101 / 91)

NOTE: Contact AMI for custom versions

**Figure 2: Block Diagram**

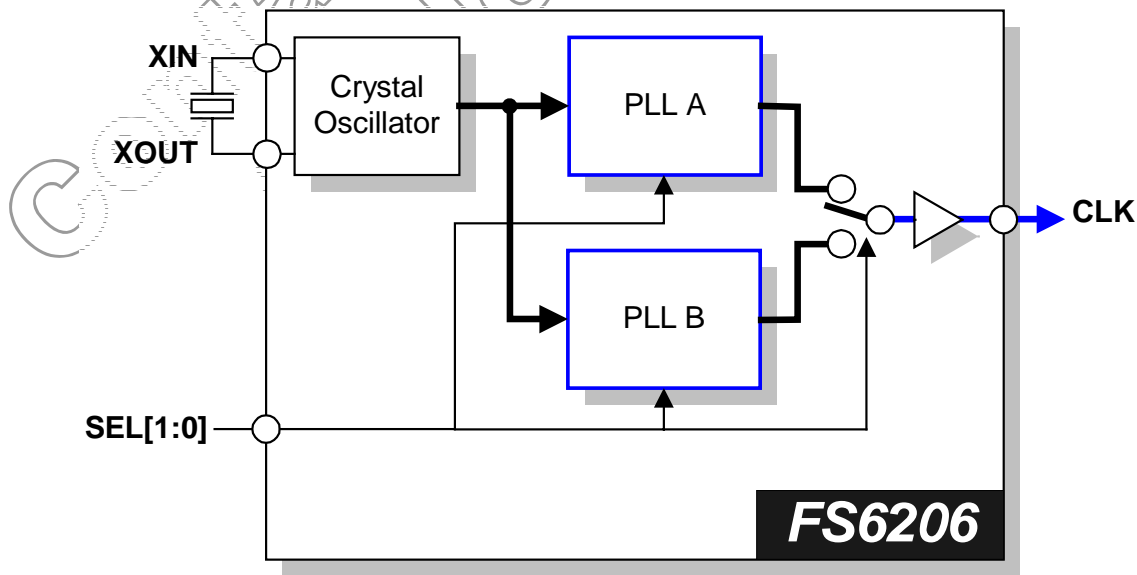

# FS6206

## Dual-PLL Clock Generator IC



**Table 2: Pin Descriptions**

Key: AI = Analog Input; AO = Analog Output; DI = Digital Input; DI<sup>U</sup> = Input with Internal Pull-Up; DI<sub>D</sub> = Input with Internal Pull-Down; DIO = Digital Input/Output; DI-3 = Three-Level Digital Input, DO = Digital Output; P = Power/Ground; # = Active Low pin

PIN	TYPE	NAME	DESCRIPTION
1	AI	XIN	Crystal Oscillator Feedback
2	P	VDD	Power Supply (+3.3V or +5V) – see Version Information
3	P	VSS	Ground
4	P	VSS	Ground
5	DO	CLKB	Clock Output
6	DI <sup>U</sup>	S0	Control Input (see Table)
7	DI <sup>U</sup>	S1	Control Input (see Table)
8	AO	XOUT	Crystal Oscillator Drive

Contact Factory Prior  
to New Designs

### 3.0 Electrical Specifications

**Table 3: Absolute Maximum Ratings**

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. These conditions represent a stress rating only, and functional operation of the device at these or any other conditions above the operational limits noted in this specification is not implied. Exposure to maximum rating conditions for extended conditions may affect device performance, functionality, and reliability.

PARAMETER	SYMBOL	MIN.	MAX.	UNITS
Supply Voltage ( $V_{SS} = \text{ground}$ )	$V_{DD}$	$V_{SS}-0.5$	7	V
Input Voltage, dc	$V_I$	$V_{SS}-0.5$	$V_{DD}+0.5$	V
Output Voltage, dc	$V_O$	$V_{SS}-0.5$	$V_{DD}+0.5$	V
Input Clamp Current, dc ( $V_I < 0$ or $V_I > V_{DD}$ )	$I_{IK}$	-50	50	mA
Output Clamp Current, dc ( $V_I < 0$ or $V_I > V_{DD}$ )	$I_{OK}$	-50	50	mA
Storage Temperature Range (non-condensing)	$T_S$	-65	150	°C
Ambient Temperature Range, Under Bias	$T_A$	-55	125	°C
Junction Temperature	$T_J$		125	°C
Lead Temperature (soldering, 10s)			260	°C
Input Static Discharge Voltage Protection (MIL-STD 883E, Method 3015.7)			2	kV



**CAUTION: ELECTROSTATIC SENSITIVE DEVICE**

Permanent damage resulting in a loss of functionality or performance may occur if this device is subjected to a high-energy electrostatic discharge.

**Table 4: Operating Conditions**

PARAMETER	SYMBOL	CONDITIONS/DESCRIPTION	MIN.	TYP.	MAX.	UNITS
Supply Voltage (3.3 volt system)	$V_{DD}$	SEE NOTE 1	3.0	3.3	3.6	V
Supply Voltage (5.0 volt system)	$V_{DD}$	SEE NOTE 1	4.5	5.0	5.5	V
Ambient Operating Temperature Range	$T_A$	SEE NOTE 1	0		70	°C
Crystal Resonator Frequency	$f_{XTAL}$	Fundamental Mode	5		18	MHz

NOTE 1: These specifications represent generic FS6206 device capability. Device specifications for a particular version (i.e. FS6206-xx) are guaranteed only with the operating voltage and reference frequency specified in Version Information.

# FS6206

## Dual-PLL Clock Generator IC



### 4.0 Package Information

**Table 5: 8-pin SOIC (0.150") Package Dimensions**

	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A	0.061	0.068	1.55	1.73
A1	0.004	0.0098	0.102	0.249
A2	0.055	0.061	1.40	1.55
B	0.013	0.019	0.33	0.49
C	0.0075	0.0098	0.191	0.249
D	0.189	0.196	4.80	4.98
E	0.150	0.157	3.81	3.99
e	0.050 BSC		1.27 BSC	
H	0.230	0.244	5.84	6.20
h	0.010	0.016	0.25	0.41
L	0.016	0.035	0.41	0.89
Θ	0°	8°	0°	8°

**Table 6: 8-pin SOIC (0.150") Package Characteristics**

PARAMETER	SYMBOL	CONDITIONS/DESCRIPTION	TYP.	UNITS
Thermal Impedance, Junction to Free-Air 8-pin 0.150" SOIC	$\theta_{JA}$	Air flow = 0 m/s	110	°C/W
Lead Inductance, Self	L <sub>11</sub>	Corner lead	2.0	nH
		Center lead	1.6	
Lead Inductance, Mutual	L <sub>12</sub>	Any lead to any adjacent lead	0.4	nH
Lead Capacitance, Bulk	C <sub>11</sub>	Any lead to V <sub>SS</sub>	0.27	pF

## 5.0 Ordering Information

**Table 7: Device Ordering Codes**

ORDERING CODE	DEVICE NUMBER	PACKAGE TYPE	OPERATING TEMPERATURE RANGE	SHIPPING CONFIGURATION
11640-824	FS6206-01	8-pin (0.150") SOIC (Small Outline Package)	0°C to 70°C (Commercial)	Tape and Reel
11640-834	FS6206-01	8-pin (0.150") SOIC (Small Outline Package)	0°C to 70°C (Commercial)	Tubes

## 6.0 Revision Information

DATE	PAGE	DESCRIPTION
4/24/00	5	Added ordering code information
4/24/00	1, 2	Fixed formatting errors

Contact Factory Direct to New Designs

**Copyright © 1999, 2000 American Microsystems, Inc.**

Devices sold by AMI are covered by the warranty and patent indemnification provisions appearing in its Terms of Sale only. AMI makes no warranty, express, statutory implied or by description, regarding the information set forth herein or regarding the freedom of the described devices from patent infringement. AMI makes no warranty of merchantability or fitness for any purposes. AMI reserves the right to discontinue production and change specifications and prices at any time and without notice. AMI's products are intended for use in commercial applications. Applications requiring extended temperature range, unusual environmental requirements, or high reliability applications, such as military, medical life-support or life-sustaining equipment, are specifically not recommended without additional processing by AMI for such applications.

**American Microsystems, Inc., 2300 Buckskin Rd., Pocatello, ID 83201, (208) 233-4690, FAX (208) 234-6796, WWW Address: <http://www.amis.com> E-mail: [tgp@amis.com](mailto:tgp@amis.com)**