

# CONNECTORS MANUFACTURER














## Ejector Header 2.0mm H=8.1mm SMT/Right Angle/Straight Type

### Specifications


Current Rate: 2.0 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

### Material

Insulator: Polyester, UL 94V-0  
 ©Standard: Nylon 6T  
 Terminal: Copper Alloy  
 Plating: Gold Plated

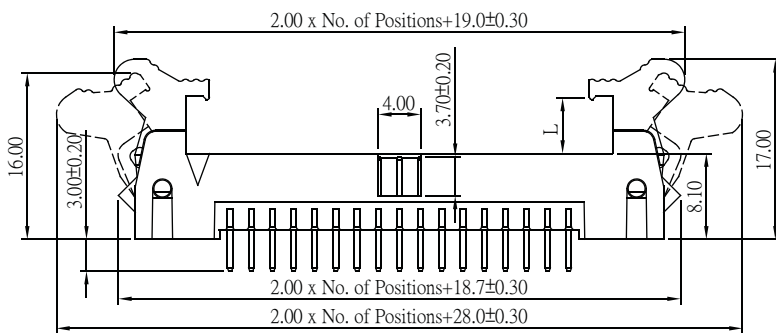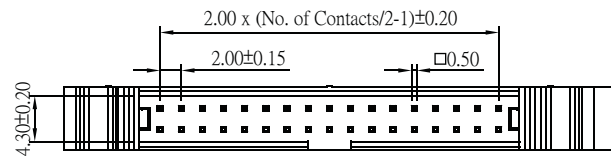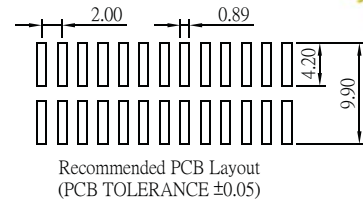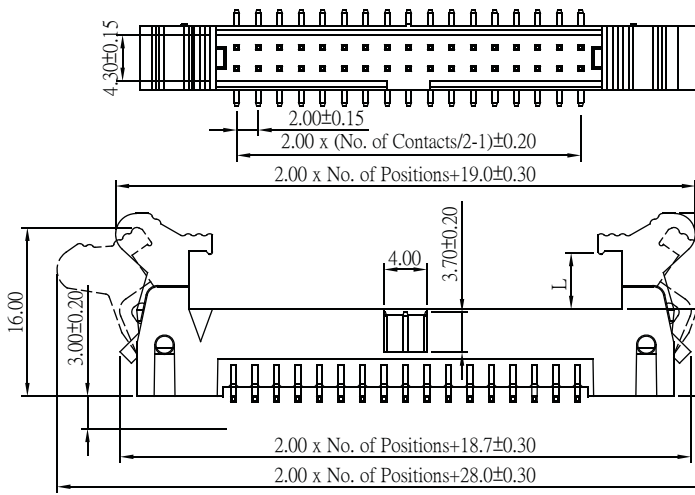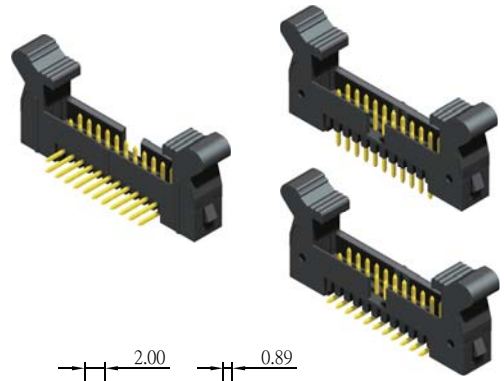

## ORDER INFORMATION

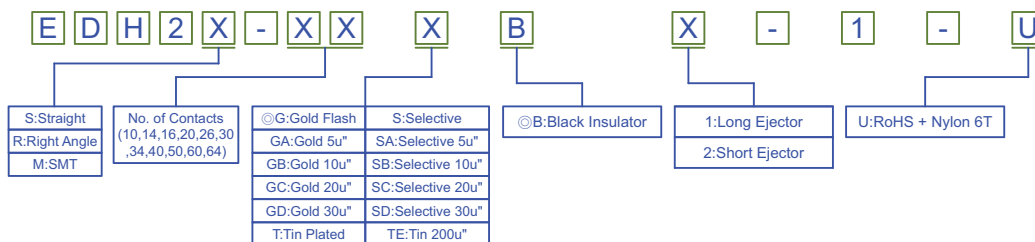

©: Standard Recommended

Ejector Header 2.0mm

RoHS

CONNECTORS MANUFACTURE