

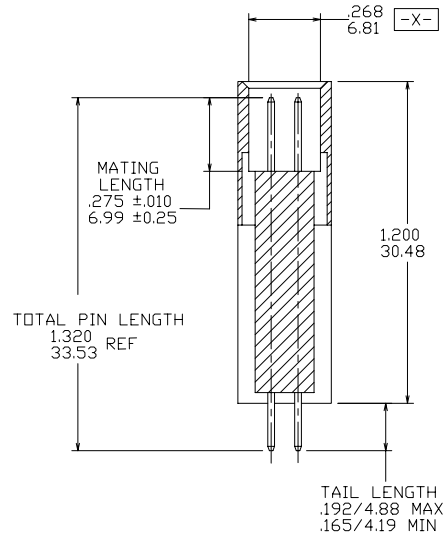


PRODUCT NO.
SEE TABLE

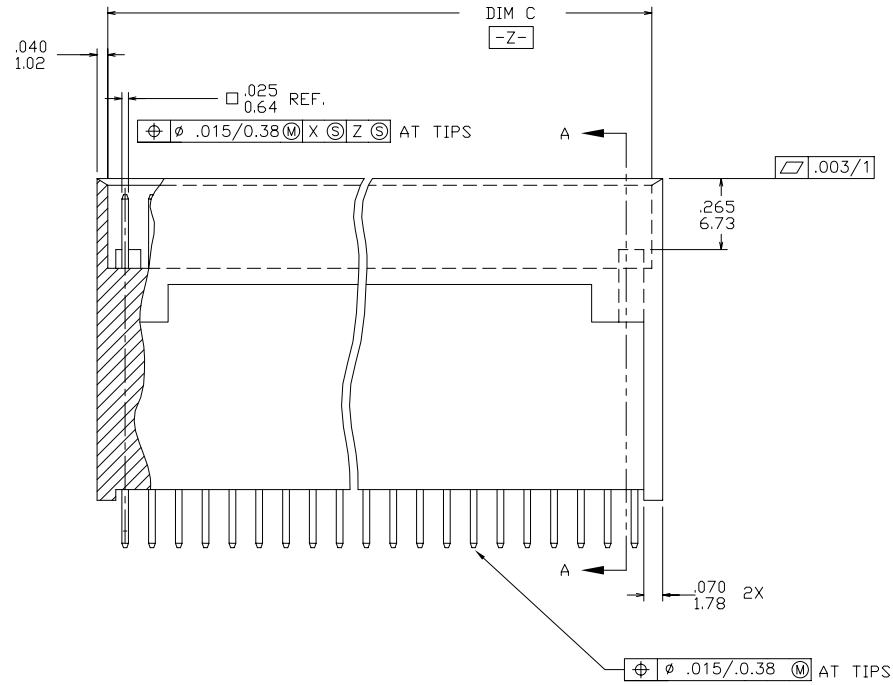

SECTION A-A

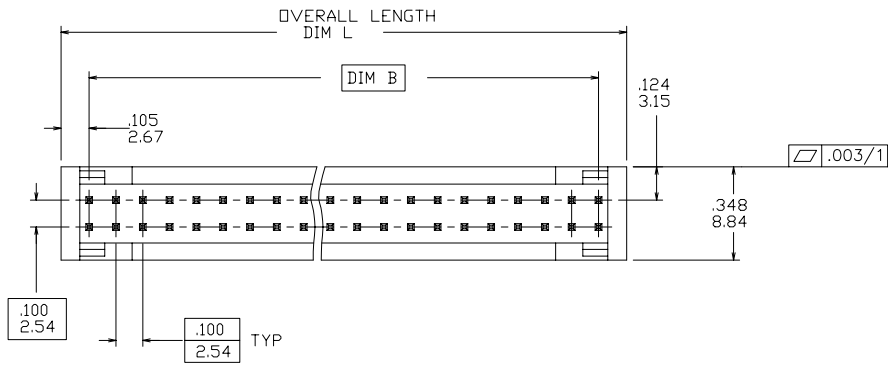


mat'l. code		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection ⊕		product family HEADERS	
ltr	ecn no	dr	date	tolerances unless otherwise specified					
E	V50575	LSS	8/23/95	angles	.XX±.01/.3		INCH/MM		title
F	M05-0089	MHT	5/20/05	linear	.XXX±.005/.13		scale 1:1		VERTICAL STACKING 2 ROW HDR 1.2/30.48 W/O MTG HOLES
G	M07-0116	AGS	2/25/07	0°±2'	.XXXX±.0020/.051		FCJ		dwg no 79860
				dr	L. SANDERS	8/23/95	sheet 1 of 2		size A3
				enr	L. FYE	8/23/95	type		Product Customer Drawing
				chr	T. BREWBAKER	8/23/95			
				appd	L. FYE	8/23/95			
sheet index	revision sheet	G	G						
	1	1	2						



Copyright FCI

form: A3

PRODUCT NO. NOTE 6	SIZE	DIM B	DIM C	OVERALL LENGTH DIM L
79860-001				UNAVAILABLE
-002				UNAVAILABLE
-003				UNAVAILABLE
-004				UNAVAILABLE
-005				UNAVAILABLE
-006	2X10	.900/22.86	1.03/26.2	1.11/28.2
-007				UNAVAILABLE
-008				UNAVAILABLE
-009				UNAVAILABLE
-010				UNAVAILABLE
-011	2X15	1.400/35.56	1.53/38.9	1.61/40.9
-012				UNAVAILABLE
-013				UNAVAILABLE
-014				UNAVAILABLE
-015				UNAVAILABLE
-016	2X20	1.900/48.26	2.03/51.6	2.11/53.6
-017				UNAVAILABLE
-018				UNAVAILABLE
-019				UNAVAILABLE
-020	2X24	2.300/58.42	2.43/61.7	2.51/63.8
-021				UNAVAILABLE
-022	2X26	2.500/63.50	2.63/66.8	2.71/68.8
-023				UNAVAILABLE
-024				UNAVAILABLE
-025				UNAVAILABLE
-026	2X30	2.900/73.66	3.03/77.0	3.11/79.0
-027				UNAVAILABLE
-028	2X32	3.100/78.74	3.23/82.0	3.31/84.1
-029				UNAVAILABLE
-030				UNAVAILABLE
-031				UNAVAILABLE
79860-032				UNAVAILABLE

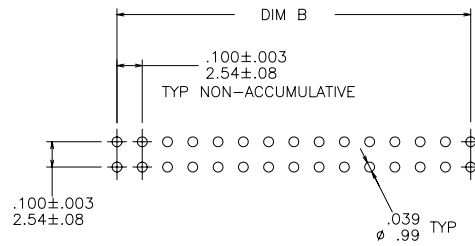

RECOMMENDED PC BOARD LAYOUT
SCALE 4/1

NOTES:

- MOLDING MATERIAL: 20% MIN GLASS FILLED NYLON PER UL 94V-0. COLOR-BLACK
- TERMINAL MATERIAL: 3/4 HARD PHOS BRONZE ALLOY UNS C51000
- TERMINAL PLATING: 30u"/.76u MIN Au OVER 50u"/1.27u MIN Ni.
- PIN RETENTION TO BE 3 LBS/1.4 KG MIN PER PIN IN EITHER DIRECTION.
- COMPANY LOGO TO BE MOLDED IN APPROX LOCATION SHOWN.
- ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.



FCIconnect.com

Copyright FCI

mat'l. code		surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection ⊕	product family HEADERS
ltr	ecn	no	dr	date	tolerances unless otherwise specified
G					angles .XX±.01/.3 linear .XXX±.005/.13 INCH/MM
					0°±2' .xxxx±.0020/.051 scale 1:1
			dr	L. SANDERS	8/23/95
			engr	L. FYE	8/23/95
			chr	T. BREWBAKER	8/23/95
			appd	L. FYE	8/23/95
sheet	revision				
index	sheet				
				title VERTICAL STACKING 2 ROW HDR 1.2/30.48 W/O MTG HOLES dwg no 79860 sheet 2 of 2 size A3 type Product Customer Drawing	

form: A3