



CUSTOMER COPY

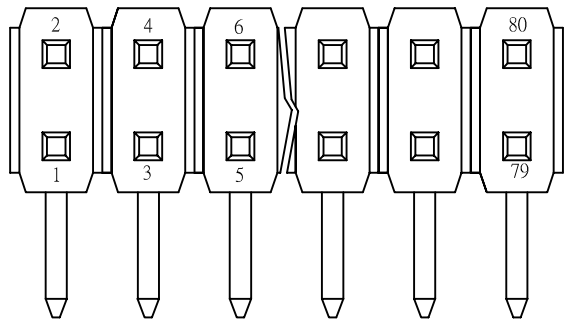

ORDER INFORMATION

183 26 XX XX X

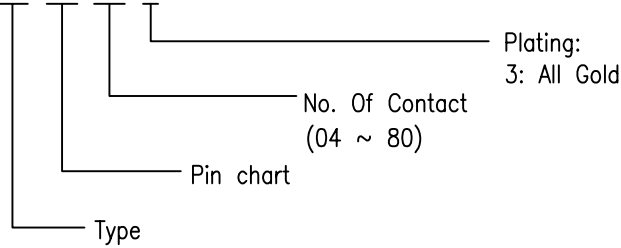



REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

SPECIFICATION

- \* Current Rating:  
1 A
- \* Withstanding Voltage:  
600 VAC ( 1 min. )
- \* Insulation Resistance:  
1000 Megohms MIN.
- \* Contact Resistance:  
30 Milliohms MAX.
- \* Operating Temperature:  
-40°C to +85°C
- \* Retention Force: 600g MIN.


MATERIAL

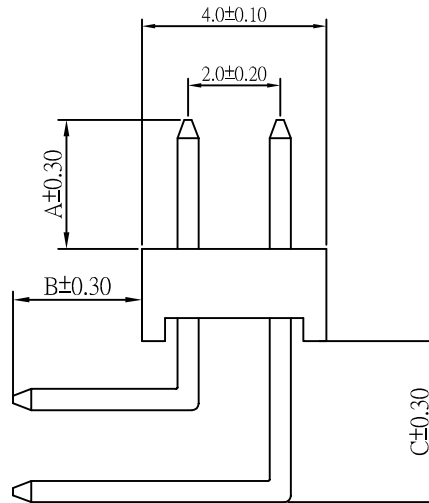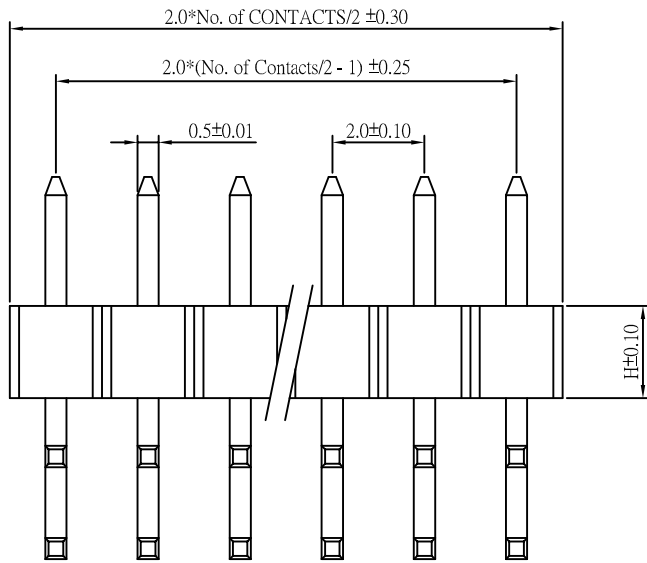


- \* Contact: BRASS  
0.50mm square post
- \* Insulator: PBT & 30% G.F. OR Nylon 6T
- \* Plating: All Gold



Pin Chart

No.	A	B	C	H	NC PIN
00	5.00	2.00	4.00	2.00	P5.6.26
01	4.00	2.80	4.00	2.00	P14
02	3.90	2.80	3.40	2.00	P3.4
03	4.00	2.80	4.00	2.00	P1
04	3.90	2.80	3.40	2.00	P3.4.11.12
05					



 <b>鈺滿榮企業股份有限公司</b> <b>ACMELUX CO., LTD.</b>			
0.0±	SCALE:	TITLE:	PART NO: 109600
0.00±	UNIT: MM	2.00X2.00MM (.079"*.079") PIN HEADER Dual Row NC PIN	APP BY:
0.000±			CHK BY:
 		MATL: PBT + 30% G.F.	DR BY: JACK LIN
		DWG. NO. C18326XXXX	