


Straight DIP type male connector for PCBs

For PCBs

LPC-() (T) MA2()

Straight DIP

Low profile

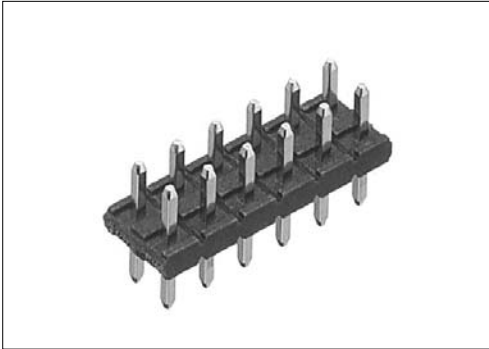


● Configuration of product Part No.

LPC- () (T) MA2 ()

① ② ③ ④

- ① Series name
- ② No. of contacts: 2-24
- ③ Length No. of contact:
Refer to the table of dimensions below.
- ④ Contact plating
Blank : Tin/Lead plating
G : Gold plating

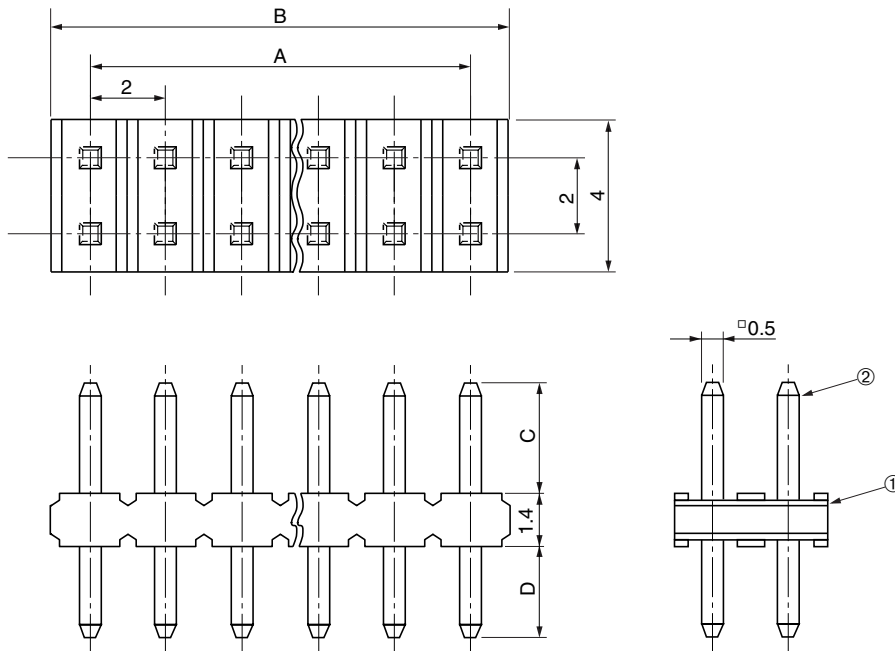

● Dimensions

Part No.	A	B
LPC-2(T)MA2()	-	2
LPC-4(T)MA2()	2	4
LPC-6(T)MA2()	4	6
LPC-8(T)MA2()	6	8
LPC-10(T)MA2()	8	10
LPC-12(T)MA2()	10	12
LPC-14(T)MA2()	12	14
LPC-16(T)MA2()	14	16
LPC-18(T)MA2()	16	18
LPC-20(T)MA2()	18	20
LPC-22(T)MA2()	20	22
LPC-24(T)MA2()	22	24

Part No.	C	D
LPC-()MA2()	3	3
LPC-()TMA2()	2.5	2.5
LPC-()T1MA2()	1.5	
LPC-()T2MA2()	2	1
LPC-()T3MA2()	1.5	2
LPC-()T4MA2()		2.9
LPC-()T5MA2()	2.9	2.1
LPC-()T6MA2()	3.5	5.7
LPC-()T7MA2()		5.1

● Components

① Insulator
② Contacts

Because some combinations of "Configurations of Product Part No.", are under consideration for development, please contact us for availability details.

Mating connectors: LPC series of female connectors or shunt plugs