


Data Sheet 2567, Rev. -

**1N4001S THRU 1N4007S**  
**GENERAL PURPOSE SILICON RECTIFIER**

**Reverse Voltage - 50 to 1000 Volts Forward Current - 1.0 Ampere**

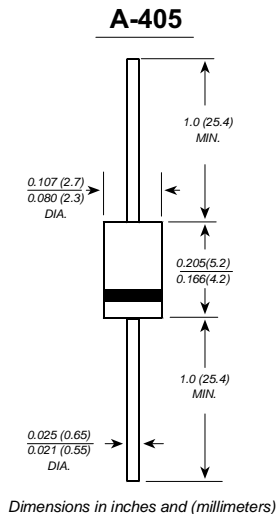

**FEATURES**

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

**MECHANICAL DATA**

**Case:** A-405 molded plastic body  
**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.008 ounce, 0.23 grams

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**







Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

|   | SYMBOLS         | 1N 4001S    | 1N 4002S | 1N 4003S | 1N 4004S | 1N 4005S | 1N 4006S | 1N 4007S | UNITS                     |
|---|-----------------|-------------|----------|----------|----------|----------|----------|----------|---------------------------|
| Maximum repetitive peak reverse voltage   | $V_{RRM}$       | 50          | 100      | 200      | 400      | 600      | 800      | 1000     | VOLTS                     |
| Maximum RMS voltage   | $V_{RMS}$       | 35          | 70       | 140      | 280      | 420      | 560      | 700      | VOLTS                     |
| Maximum DC blocking voltage   | $V_{DC}$        | 50          | 100      | 200      | 400      | 600      | 800      | 1000     | VOLTS                     |
| Maximum average forward rectified current<br>0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$         | $I_{(AV)}$      | 1.0         |          |          |          |          |          |          | Amp                       |
| Peak forward surge current<br>8.3ms single half sine-wave superimposed on<br>rated load (JEDEC Method)    | $I_{FSM}$       | 30.0        |          |          |          |          |          |          | Amps                      |
| Maximum instantaneous forward voltage at 1.0A   | $V_F$           | 1.1         |          |          |          |          |          |          | Volts                     |
| Maximum DC reverse current $T_A=25^\circ\text{C}$<br>at rated DC blocking voltage $T_A=100^\circ\text{C}$ | $I_R$           | 5.0<br>50.0 |          |          |          |          |          |          | $\mu\text{A}$             |
| Typical junction capacitance (NOTE 1)   | $C_J$           | 15.0        |          |          |          |          |          |          | pF                        |
| Typical thermal resistance (NOTE 2)   | $R_{\theta JA}$ | 50.0        |          |          |          |          |          |          | $^\circ\text{C}/\text{W}$ |
| Operating junction and storage temperature range  | $T_J, T_{STG}$  | -65 to +175 |          |          |          |          |          |          | $^\circ\text{C}$          |

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
 2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

Data Sheet 2567, Rev. -

**RATINGS AND CHARACTERISTIC CURVES 1N4001S THRU 1N4007S**

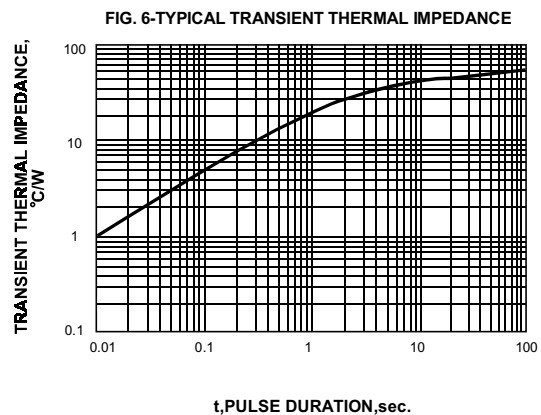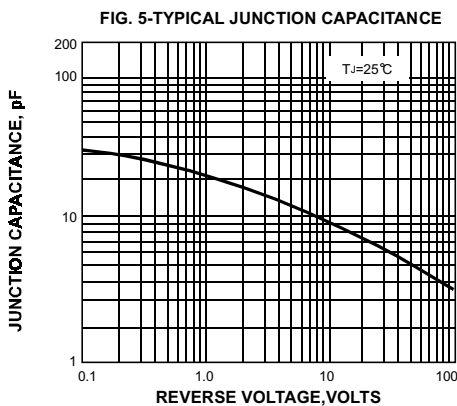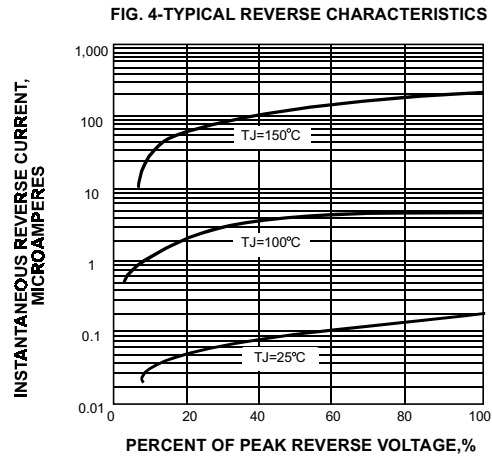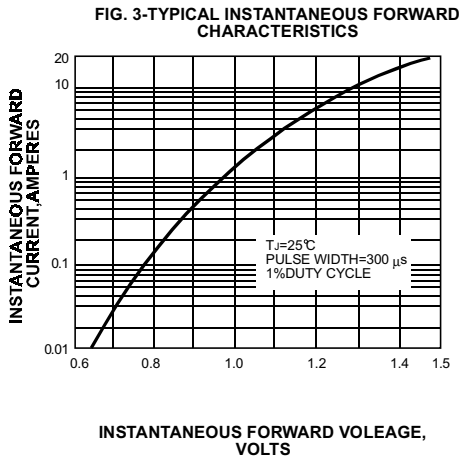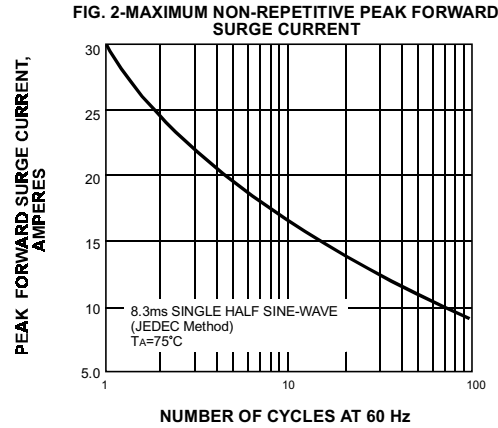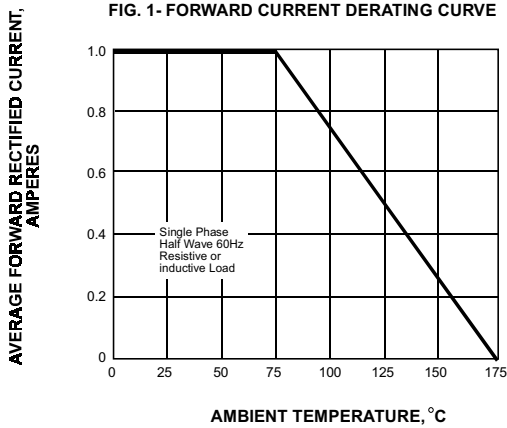

**TECHNICAL DATA**

**DISCLAIMER:**

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.