
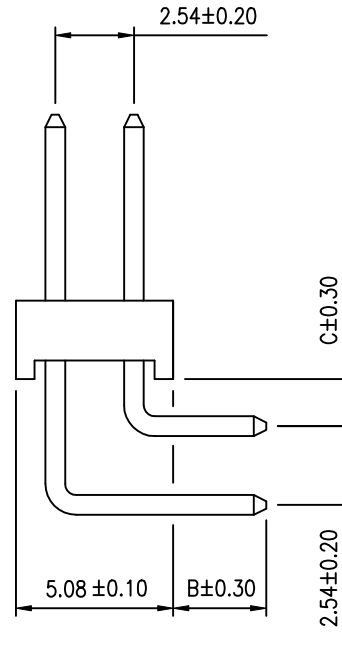



REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

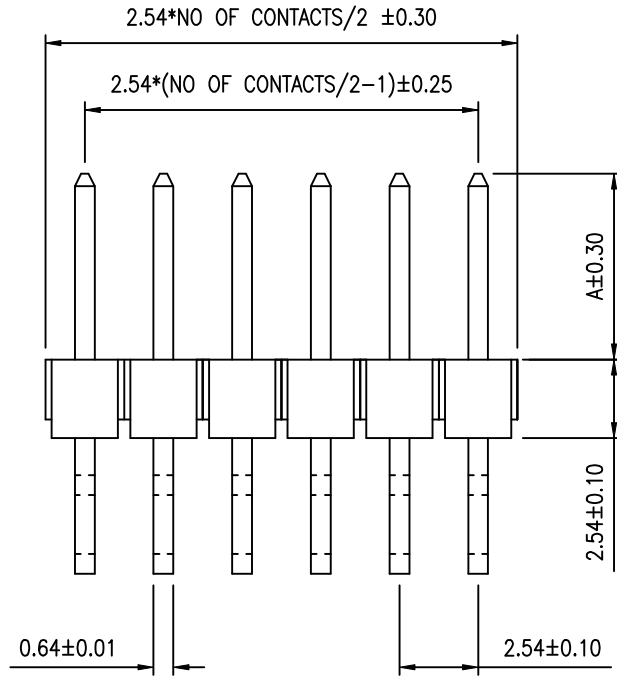

SPECIFICATION

- * Current Rating: 3 A
- * Withstanding Voltage: 800 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms min.
- * Contact Resistance: 30 Milliohms max.
- * Operating Temperature: -40°C to $+85^{\circ}\text{C}$
- * RETENTION FORCE: 750g MIN.

ORDER INFORMATION

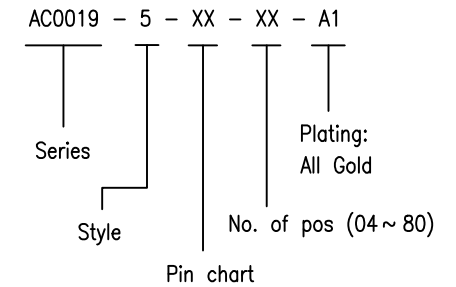


MATERIAL

- * Contact: Brass , 0.64mm square post
- * Insulator: PBT & 30% G.F.
- * Plating: Gold

Pin Chart

Pin	A	B	C
01	6.00	3.00	1.54
02			
03			
04			

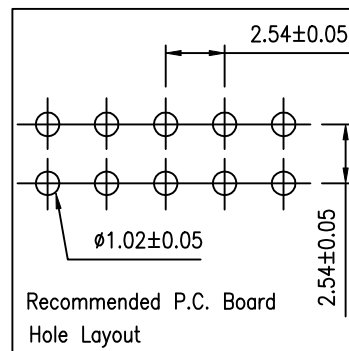

TECHWIN OPTO-ELECTRONICS CO., LTD.			
0.0±	SCALE:	TITLE:	PART NO:
0.00±	UNIT: MM	2.54X2.54MM (.100"*.100") Pin	APP BY:
0.000±		HEADER R/A Dual Row	CHK BY:
		MATL: PBT + 30% GF	DR BY: 張金枝
		DWG. NO. A205A	