

SINGLE ROW TOP ENTRY HEADER



1156 SERIES. 1.25 mm. (0.049") pitch.



General Features

- Available in 2 through 15 circuits
- Mates with 1.25 mm crimp housing 1154 serie
- Tin plated pin
- Locking slots provide secure mating
- Polarization and low profile

Materials

- Insulator: Polyester 66 UL 94 V-0
- Contact: Tin plated brass
- Operating temperature: -25°C to +85°C
- RoHS compliant

Dimension Information

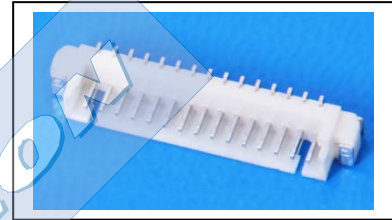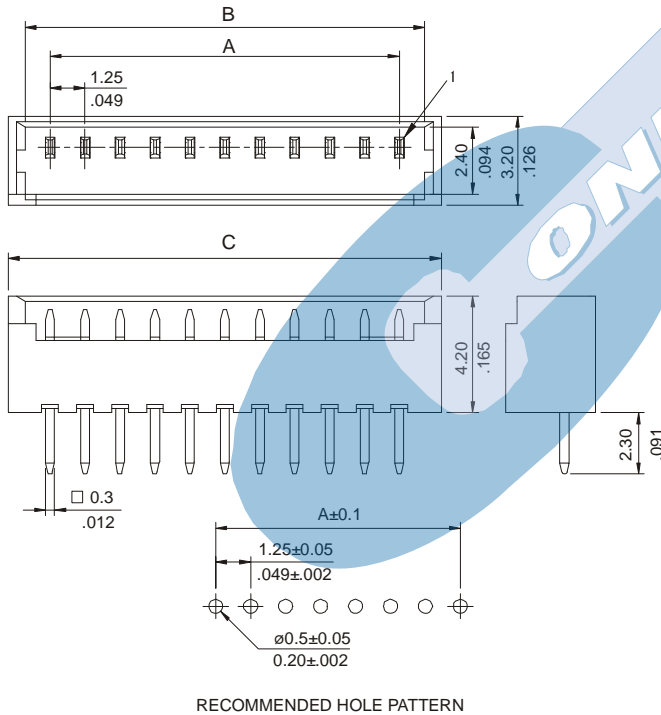

1156 - T- XX- 1
1 2 3 4

1. Connector Serie

2. (T) Contacts Plating

- T = 2. Tin-plated.
RECOMMENDED FINISH

3. (XX) Number Of Contacts

- Available in 2 through 15 circuits

Dimensions: (In mm.)

A = $1.25 \times (XX-1)$
B = $1.25 \times (XX) + 1.85$
C = $1.25 \times (XX) + 0.65$