**4-641237-2** ✓ ACTIVE


#### MTA 100

TE Internal #: 4-641237-2 Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Retention, Insulation Displacement (IDC), Wireto-Board, MTA 100

#### View on TE.com >



Connectors > Rectangular Connectors > Standard Rectangular Connectors > Nylon Gold Plated Receptacle: 2.54 mm, no Mating Alignment

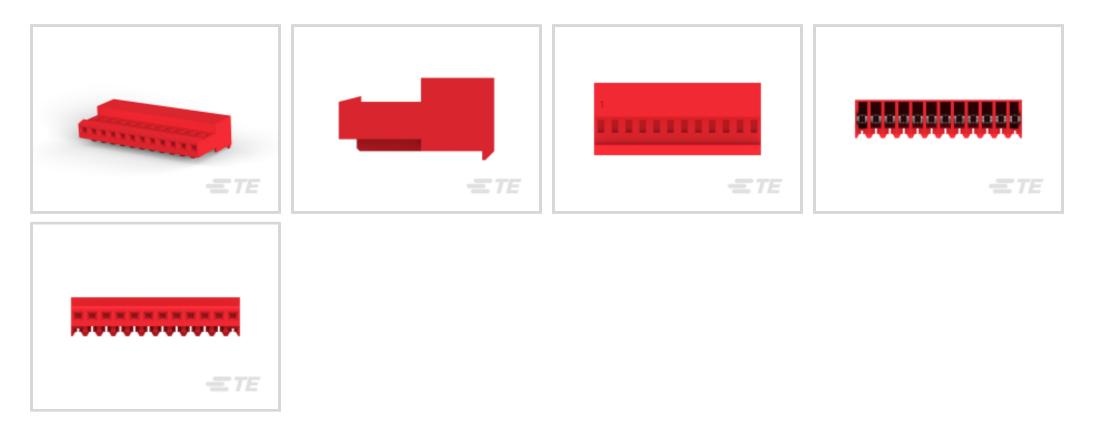

Connector Product Type: Connector Assembly

Connector & Housing Type: Receptacle

Mating Alignment: Without

Mating Retention: With

Mating Retention Type: Locking Ramp

All Nylon Gold Plated Receptacle: 2.54 mm, no Mating Alignment (89)

### Features

#### **Product Type Features**

Compatible With Discrete Wire Type	Stranded	
Connector Product Type	Connector Assembly	
Connector & Housing Type	Receptacle	
Connector System	Wire-to-Board	
Insertion Force Type	Normal	
Sealable	No	
Connector & Contact Terminates To	Wire & Cable	
Configuration Features		
Configuration Features Number of Cavities	12	
Number of Cavities	12	

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Retention, Insulation Displacement (IDC), Wire-to-Board, MTA 100



#### **Electrical Characteristics**

Operating Voltage	250 VAC	
Contact Features		
Contact Type	Receptacle	
Wire Contact Termination Area Plating Material	Tin	
Contact Underplating Material	Nickel	
Contact Mating Area Plating Material	Gold, Gold Flash over Palladium Nickel	
Contact Retention Within Housing	With	
Contact Current Rating (Max)	5 A	
Termination Features		
Termination Method to Wire & Cable	Insulation Displacement (IDC)	
Mechanical Attachment		
Contact Retention Type Within Housing	Locking Lance	
Mating Alignment	Without	
Mating Retention	With	
Mating Retention Type	Locking Ramp	
Connector Mounting Type	Cable Mount (Free-Hanging)	

## Housing Features

Housing Material	Nylon 6/6	
Housing Color	White	
Centerline (Pitch)	2.54 mm[.1 in]	
Dimensions		
Connector Height	13.21 mm[.52 in]	
Product Width	6.99 mm[.275 in]	
Product Length	30.48 mm[1.2 in]	
Wire Size	.3 – .4 mm²	
Usage Conditions		
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]	
Operation/Application		
Shielded	No	
Circuit Application	Signal	
Industry Standards		

**C** For support call+1 800 522 6752

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Retention, Insulation Displacement (IDC), Wire-to-Board, MTA 100



CSA Rating	LR 7189	
UL Rating	Recognized	
Agency/Standard	CSA, UL	
Approved Standards	UL E28476	
UL Flammability Rating	UL 94V-2	
Packaging Features		
Packaging Quantity	500	
Packaging Method	Box & Carton	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE	

#### Halogen Content

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Does not contain REACH SVHC

2023 (235)

#### Solder Process Capability

Not applicable for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Retention, Insulation Displacement (IDC), Wire-to-Board, MTA 100



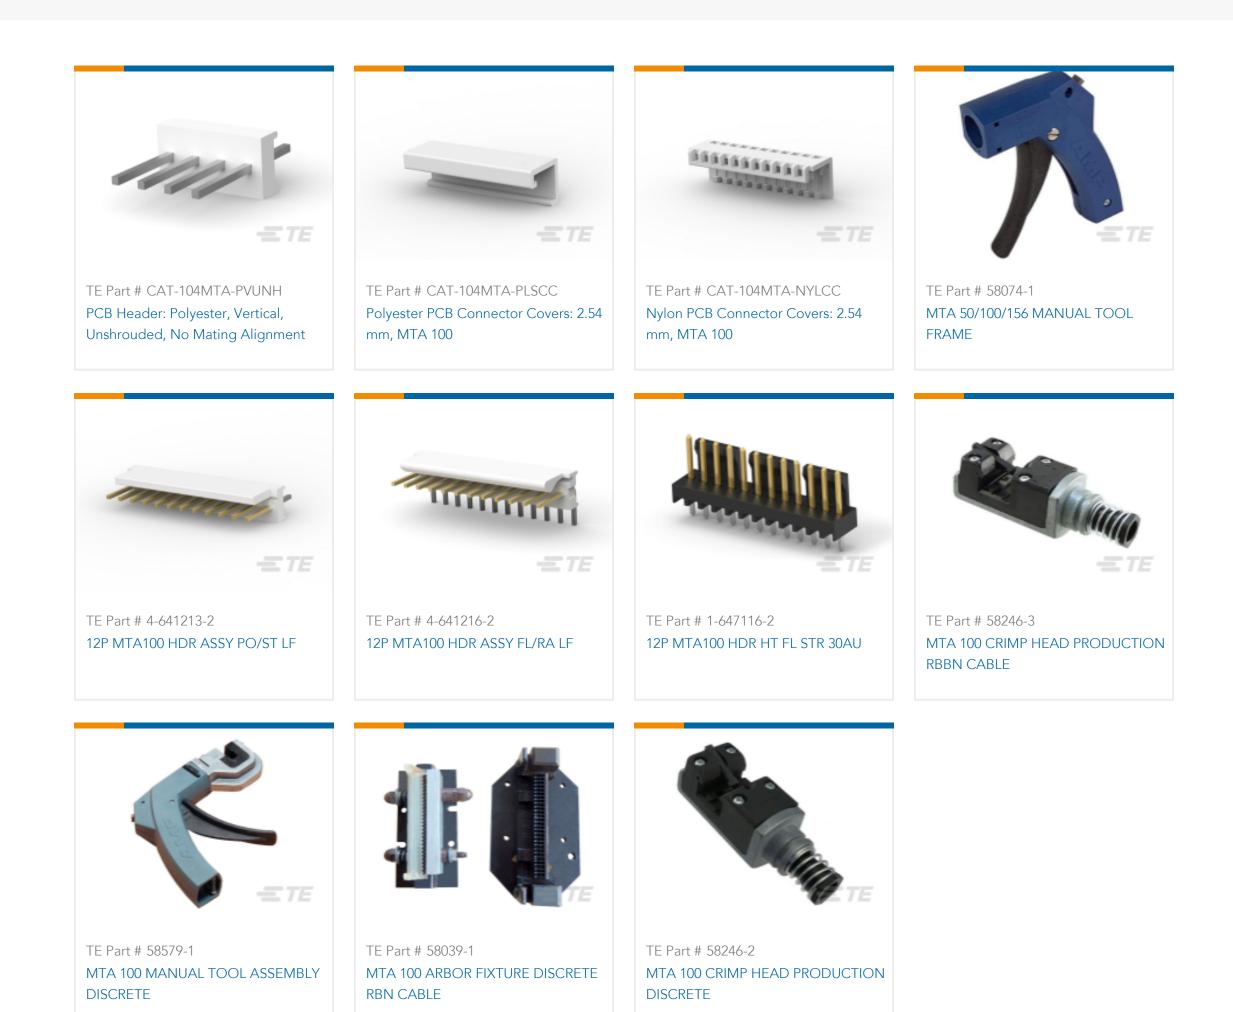

## Also in the Series | MTA 100

Socio Cinto			
Connector Caps & Covers(69)	Connector Hardware(1)	Insertion & Extraction Tools(2)	PCB Headers & Receptacles(440)
		A A A A	

Wire-to-Board Connector Contacts(8)

Wire-to-Board Connector Assemblies

& Housings(1)

# Customers Also Bought

Standard Rectangular Connectors(495)

**&** For support call+1 800 522 6752

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Retention, Insulation Displacement (IDC), Wire-to-Board, MTA 100





## Documents

Product Drawings 12P MTA100 CONN ASSY RED 30AU

English

CAD Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_4-641237-2\_Y.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_4-641237-2\_Y.3d\_igs.zip

English

Customer View Model

```
ENG_CVM_CVM_4-641237-2_Y.3d_stp.zip
```

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Product Environmental Compliance Product Compliance

English

**Product Compliance** 

English

Standard Rectangular Connectors, Connector Assembly, Receptacle, Mating Retention, Insulation Displacement (IDC), Wire-to-Board, MTA 100



Agency Approvals Agency Approval Document

English