

# CPD02 1.27mm PIN HEADER, STRAIGHT TYPE




Pitch: 1.27mm

## SPECIFICATION

Current Rating: 1.5 Amp  
 Insulation Resistance: 2000 Megohms min  
 Contact Resistance: 20 m ohms Max  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -40 ° C to +105° C  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0  
 © Standard : NYLON-6T





RoHS compliant

TYPE A

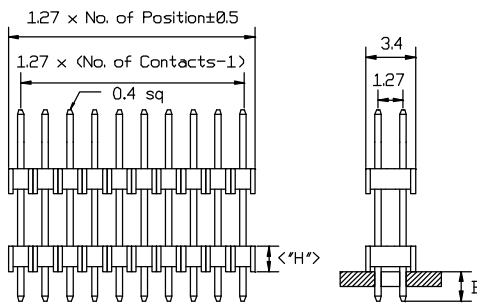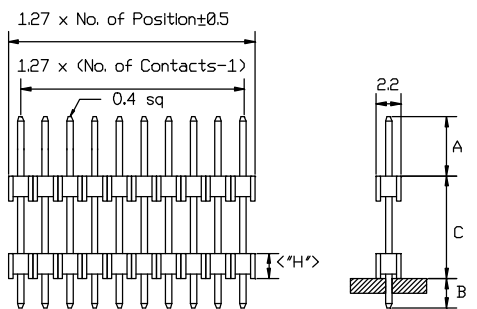

Recommended P.C.B Layout

TYPE B

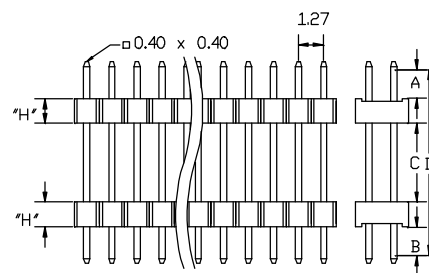

## HOW TO ORDER

CPD02- [X] - [X] - [X] - [X] - [X] - A/B/C/D

<b>NO. OF CONTACT</b> 02 TO 80	<b>CONTACT PLATING</b> A : Gold flash B : 10u" Gold C : 15u" Gold D : 30u" Gold © Duplex Plating H: Gold flash/Tin © Standard: A	<b>ROW TYPE</b> A: Single Row B: Dual Row	<b>BODY HEIGHT</b> H1: 1.1mm H2: 1.5mm H3: 2.5mm	<b>SPECIAL FUNCTION</b> A: TYPE A B: TYPE B  <b>PIN LENGTH</b> A/B/C/D Please mark the desired length in the A/B/C/D
-----------------------------------	---	---	---	--