
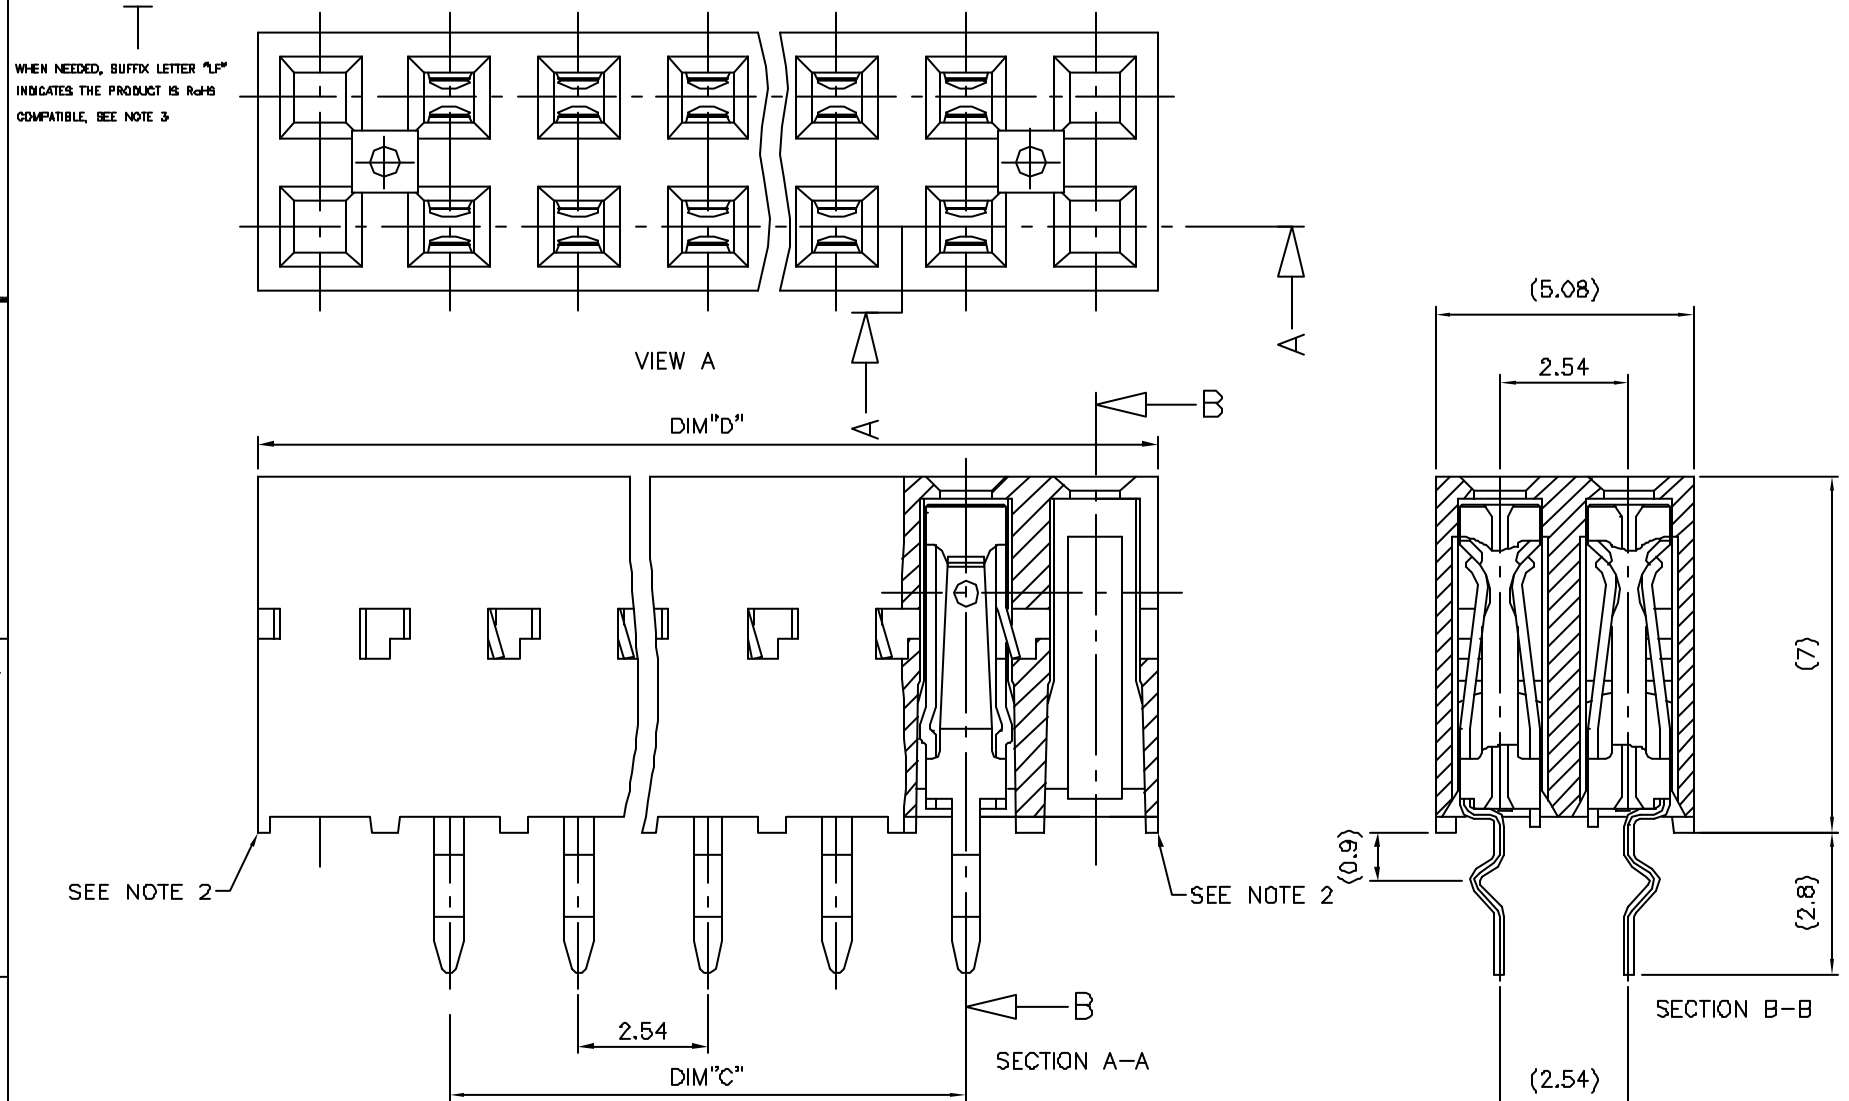


PRODUCT NUMBER	NB OF POSITIONS	DIM"C"	DIM"D"	NUMBER OF TER.	CONTACT PLACED IN CAVITY (TABLE ACCORDING VIEW A)																																							
					1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
89853-Y01(LF)	2 X 32	73.66	81.20	60	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X				
89853-Y02(LF)	2 X 19	40.64	48.18	34	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X					
89853-Y03(LF)	2 X 12	22.86	30.40	20	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X						
89853-Y04(LF)	2 X 7	10.16	17.70	10	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X							
89853-Y05(LF)	2 X 6	7.62	15.16	8	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X							
89853-Y06(LF)	2 X 40	99.06	101.52	76	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X						

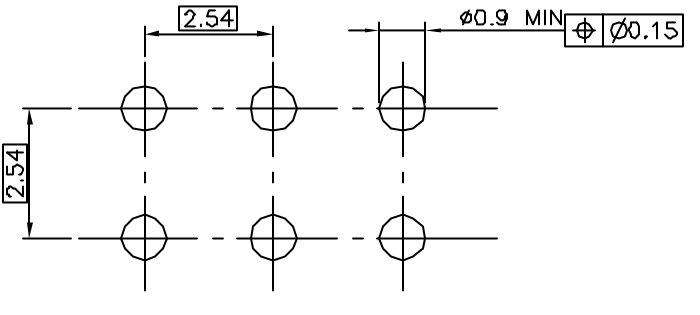

NOTES:

- 1 - MATERIAL HOUSING: THERMOPLASTIC POLYESTER 30% GLASS FILLED, COLOUR BLUE. FLAME RETARDANT PER UL-94 CATEGORY V0. MATERIAL TERMINAL: PHOSPHOR BRONZE EXTRA HARD.
- 2 - NO STAMP OFF AT EACH END EXCEPT FROM 2X2 UP TO 2X7 POS
- 3 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - c - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-22-008

89853-4XX	5µm SnPb	SnPb
89853-3XX	0.76µm GOLD	SnPb
PLATING CODE	CONTACT AREA	SOLDER TAIL
	PLATING THICKNESS OVER 1.27µm Ni	

89853-4XXLF	5µm Sn	Sn
89853-3XXLF	0.76µm GOLD	Sn
PLATING CODE	CONTACT AREA	SOLDER TAIL
	PLATING THICKNESS OVER 1.27µm Ni	

mat'l. code	SEE NOTES	surface ISO 1302	tolerance ISO 416 ISO 1101	projection	product family DX VCC DR
Ltr	ecr no	dr	date	tolerances unless otherwise specified	title
C	F40194	PNZ	94.03.08	angles Linear	KINKED LEGS SELECTIVE LOADED
D	F90138	DLE	98.02.12	±0.3	
E	F03088	DLE	03.04.11	mm	scale 10:1
F	F04-0347	DLE	04.11.10	dr	D LEGRAND 99.02.12
G	F06-0137	DLE	06.02.27	enfr	JM.PHAMVAN 99.02.12
H	F06-0204	DLE	06.06.21	chr	P.NIZZI 99.02.12
J	F07-027	LMU	07.12.06	appd	J.M.P 99.02.12
sheet index	revision	sheet			FCJ type CUSTOMER Drawing