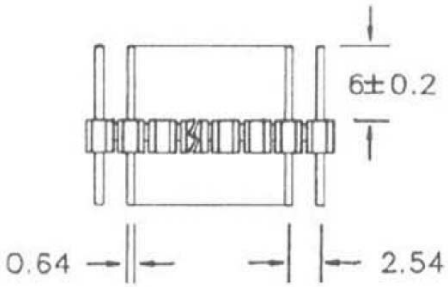

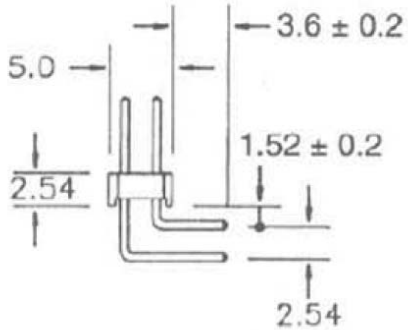



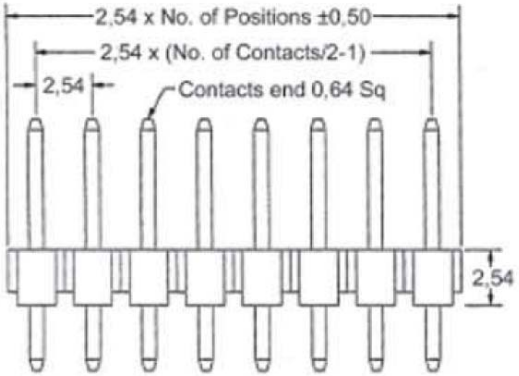

AWL254D-x-x-xx-D-R

Version

G - Straight
A - Right Angled

Contact Plating

G - Flash Gold
Z - Tin
S - Selective

Number of Contacts

04-80

Pin Length

D -A=6mm, B=3mm*
A -A=7mm, B=3mm (only straight)

Notes:

- Insulator Material: Polyester, UL94V-0
- Current Rating: 3A
- Contact Material: Brass
- Insulation Resistance: 5000MΩ min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -40°C to +105°C

RoHS Complaint

Scale	1:1							Name
TOLERANCE						Drawn	11.09.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

ASSMANN WSW components

Item No.
AWL254D-x-x-xx-D-R

Title
Pin Header, Pitch 2.54, Double Row, Tin and Gold Plating

Drawing No.

rev00

Replace

Sheet