



AMP-LATCH | AMP-LATCH Universal Headers


TE Internal #: 499910-3

Ribbon Cable Connectors, Board-to-Board, 16 Position, 2.54 mm [.1 in] Centerline, Vertical, Through Hole - Solder, 2 Row, AMP-LATCH Universal Headers

[View on TE.com >](#)

Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > Ribbon Cable Connectors >

AMP-LATCH UNIVERSAL HEADERS

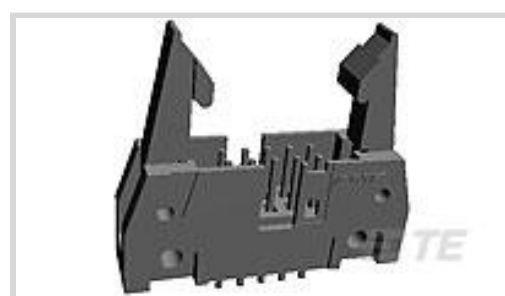

Connector System: **Board-to-Board**

Number of Positions: **16**

Centerline (Pitch): **2.54 mm [.1 in]**

PCB Mount Retention: **Without**

PCB Mount Orientation: **Vertical**

[All AMP-LATCH UNIVERSAL HEADERS \(525\)](#)

**Features**

**Product Type Features**

|                                    |                                |
|------------------------------------|--------------------------------|
| Ribbon Cable Connector Header Type | Universal Ejection Pin Headers |
| Connector Mating Latch & Lock Type | Short                          |
| Connector Product Type             | Connector Assembly             |
| Connector System                   | Board-to-Board                 |
| Connector & Housing Type           | Receptacle                     |
| Connector & Contact Terminates To  | Printed Circuit Board          |

**Configuration Features**

|                       |          |
|-----------------------|----------|
| Number of Positions   | 16       |
| PCB Mount Orientation | Vertical |
| Number of Rows        | 2        |

**Electrical Characteristics**

|                       |         |
|-----------------------|---------|
| Insulation Resistance | 5000 MΩ |
| Operating Voltage     | 250 VAC |

**Body Features**

|                       |         |
|-----------------------|---------|
| Daisy Chain           | Without |
| Primary Product Color | Black   |



|                   |          |
|-------------------|----------|
| Connector Profile | Standard |
|-------------------|----------|

### Contact Features

|   |                            |
|---|----------------------------|
| Mating Square Post Dimension                            | .64 mm[.025 in]            |
| PCB Contact Termination Area Plating Material Thickness | 2.54 $\mu$ m[100 $\mu$ in] |
| Contact Type  | Pin                        |
|   | 15 $\mu$ in                |
| Contact Mating Area Plating Material                    | Gold                       |
| Contact Shape & Form                                    | Square                     |
| PCB Contact Termination Area Plating Material           | Tin-Lead                   |
| Contact Base Material                                   | Brass                      |
| Contact Current Rating (Max)                            | 1 A                        |

### Termination Features

|   |                       |
|---|-----------------------|
| Round Termination Post & Tail Diameter      | .64 mm[.025 in]       |
| Termination Post & Tail Length              | 2.79 mm[.11 in]       |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

### Mechanical Attachment

|                         |                             |
|-------------------------|-----------------------------|
| Mating Alignment        | With                        |
| PCB Mount Alignment     | With                        |
| Panel Mount Feature     | Without                     |
| PCB Mount Retention     | Without                     |
| Mating Alignment Type   | Center, Dual Polarizing Bar |
| Mating Retention        | With                        |
| Mating Retention Type   | Ejection Latch              |
| Connector Mounting Type | Board Mount                 |

### Housing Features

|                    |                |
|--------------------|----------------|
| Housing Material   | Thermoplastic  |
| Centerline (Pitch) | 2.54 mm[.1 in] |

### Dimensions

|                             |                  |
|-----------------------------|------------------|
| Connector Height            | 13.94 mm[.55 in] |
| PCB Thickness (Recommended) | 1.57 mm[.062 in] |
| Row-to-Row Spacing          | 2.54 mm[.1 in]   |

### Usage Conditions



|                             |                            |
|-----------------------------|----------------------------|
| Housing Temperature Rating  | Standard                   |
| Operating Temperature Range | -65 – 105 °C[-85 – 221 °F] |

### Operation/Application

|                        |               |
|------------------------|---------------|
| Solder Process Feature | Solder Dipped |
| Circuit Application    | Signal        |

### Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

### Packaging Features

|                    |      |
|--------------------|------|
| Packaging Quantity | 56   |
| Packaging Method   | Tray |

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

|   |   |
|---|---|
| EU RoHS Directive 2011/65/EU                  | Not Compliant   |
| EU ELV Directive 2000/53/EC                   | Compliant with Exemptions   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JUNE 2023 (235)<br>SVHC > Threshold:<br>Pb (13% in Component Part)<br><b>Article Safe Usage Statements:</b><br>Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.  |
| Solder Process Capability                     | Wave solder capable to 265°C  |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



### Compatible Parts




TE Part # 1658621-3  
16 NOVO MIL/CTR 15DP, LEAD FREE

### Also in the Series | AMP-LATCH Universal Headers



Connector Hardware(13)



Ribbon Cable Connectors(525)

### Customers Also Bought



TE Part #1-776261-1  
14POS, PIN DIA 1.3, HDR ASSY, 180DEG, COD 1



TE Part #327748  
TAB, PIDG 16-14



TE Part #487406-2  
FFC RCPT CONT SP 30AU RL



TE Part #1-770988-0  
MINI UMNL SOK 22-18AWG AU



TE Part #1-826658-0  
2X10 POS AMPMODU II PIN HEADER



TE Part #4-1437651-1  
6DBL-04-006=6 SERIES



TE Part #2176308-9  
RP 1E 0.1W 162K 0.1% 25PPM 5K RL



TE Part #4-2176364-3  
RQ 0402 12K7 0.1% 10PPM 5K RL



TE Part #2-1571586-9  
828-AG11D-LF=800 DIP,PCB,AU/SN



TE Part #2176487-2  
BMC 0805 60R 25% A Med C

## Documents

### Product Drawings

[016 UNIV HDR SP 4S 15DP STD L2](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_499910-3\\_F.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_499910-3\\_F.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_499910-3\\_F.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

[Product Specification](#)

English

### Product Environmental Compliance

[TE Material Declaration](#)

English

### Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English

[AMP INSTALLATION PROCEDURES FOR AMP-LATCH UNIVERSAL HEADER ASSEMBLIE](#)

English

### Agency Approvals

[Agency Approval Document](#)

English