
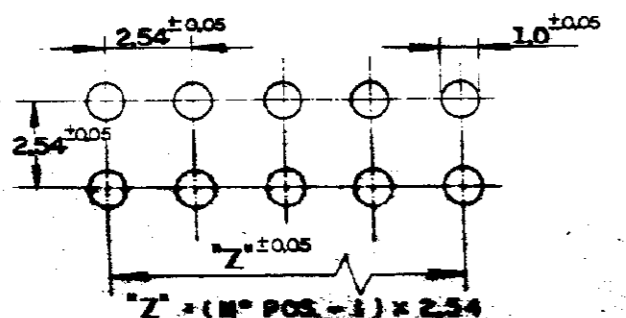


C 880160/161/162

DO NOT SCALE
DIMENSIONS IN MM.

METRIC

3rd ANGLE PROJECTION

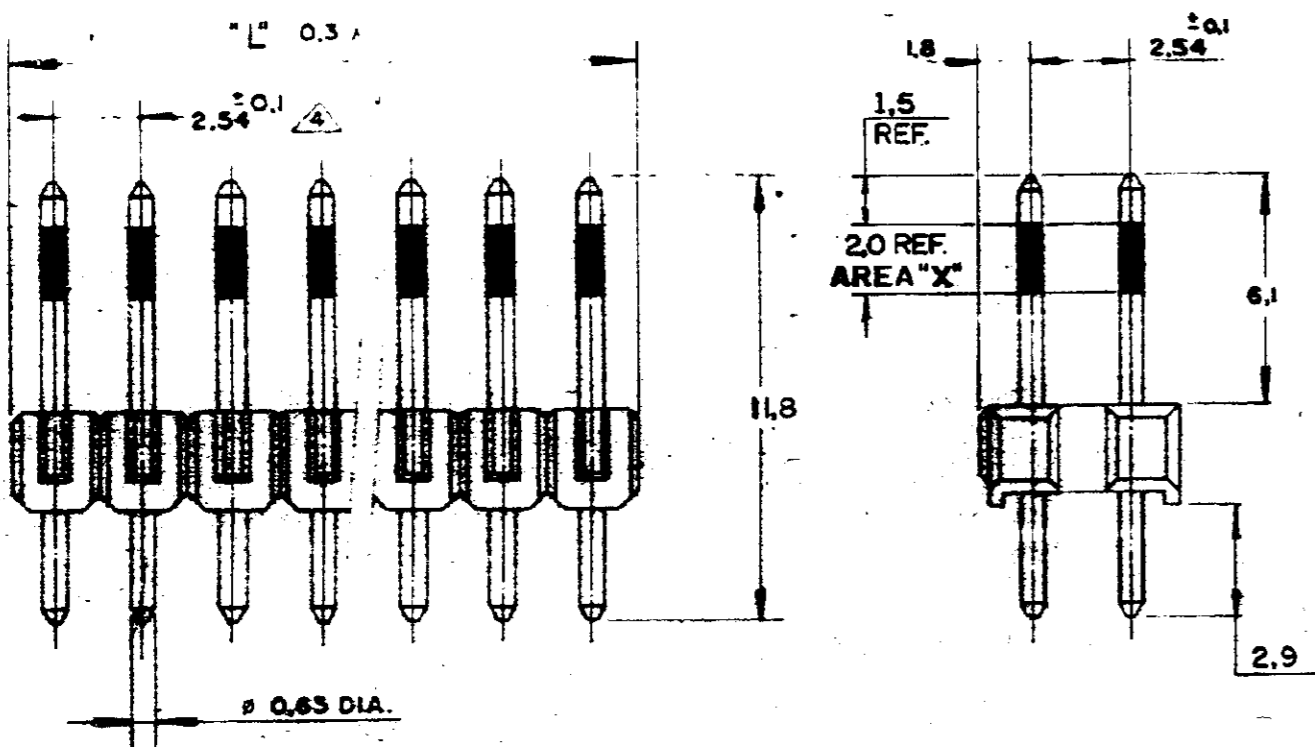

FURAÇÃO RECOMENDADA P/PLACA DE C.I.
P.C. BOARD MOUNTING AND HOLE PATTERN

NOTAS:

- 1 CONTACTO: LATÃO, C/ 0,38 μm MIN. DE Au NA AREA "X"; 2,54 μm MIN. DE SnPb NA AREA DE SOLDA, AMBOS SOBRE BANHO TOTAL DE 1,27 μm MIN. DE Ni. RECEPTACULO: TERMOPLASTICO C/ F. VIDRO V-O, PRETO.
CONTACT: BRASS, W/ 0,38 μm MIN. Au ON "X" AREA; 2,54 μm MIN. SnPb ON SOLDER AREA, BOTH OVER TOTAL PLATING 1,27 μm MIN. Ni. HOUSING: THERMOPLASTIC W/GLASS F. V-O, BLACK.
- 2 SIMILAR À NOTA 1, EXCETO PELA AREA "X", C/ 0,76 μm MIN. DE Au.
SIMILAR TO NOTE 1, EXCEPT BY "X" AREA, W/ 0,76 μm MIN. Au.
- 3 CONTACTO: LATÃO, C/ 2,54 μm MIN. DE Sn SOBRE 1,27 μm MIN. DE Ni. EM TODO CONTATO. RECEPTACULO: TERMOPLASTICO C/ F. VIDRO V-O, PRETO.
CONTACT: BRASS, W/ 2,54 μm MIN. Sn OVER TOTAL PLATING 1,27 μm MIN. Ni. HOUSING: THERMOPLASTIC W/GLASS F. V-O, BLACK.
- 4 TOLERANCIA NÃO CUMULATIVA.
TOLERANCE NON-CUMULATIVE.

INATIVO
INACTIVE

127,00	50	5-	-0	5-	-0	-0
124,46	49	4-	-9	4-	-9	-9
121,92	48	4-	-8	4-	-8	-8
119,38	47	4-	-7	4-	-7	-7
116,84	46	4-	-6	4-	-6	-6
114,30	45	4-	-5	4-	-5	-5
111,76	44	4-	-4	4-	-4	-4
109,22	43	4-	-3	4-	-3	-3
106,68	42	4-	-2	4-	-2	-2
104,14	41	4-	-1	4-	-1	-1
101,60	40	4-	0	4-	0	0
99,06	39	3-	-9	3-	-9	-9
96,52	38	3-	-8	3-	-8	-8
93,98	37	3-	-7	3-	-7	-7
91,44	36	3-	-6	3-	-6	-6
88,90	35	3-	-5	3-	-5	-5
86,36	34	3-	-4	3-	-4	-4
83,82	33	3-	-3	3-	-3	-3
81,28	32	3-	-2	3-	-2	-2
78,74	31	3-	-1	3-	-1	-1
76,20	30	3-	0	3-	0	0
73,66	29	2-	-9	2-	-9	-9
71,12	28	2-	-8	2-	-8	-8
68,58	27	2-	-7	2-	-7	-7
66,04	26	2-	-6	2-	-6	-6
63,50	25	2-	-5	2-	-5	-5
60,96	24	2-	-4	2-	-4	-4
58,42	23	2-	-3	2-	-3	-3
55,88	22	2-	-2	2-	-2	-2
53,34	21	2-	-1	2-	-1	-1
50,80	20	2-	0	2-	0	0
48,26	19	1-	-9	1-	-9	-9
45,72	18	1-	-8	1-	-8	-8
43,18	17	1-	-7	1-	-7	-7
40,64	16	1-	-6	1-	-6	-6
38,10	15	1-	-5	1-	-5	-5
35,56	14	1-	-4	1-	-4	-4
33,02	13	1-	-3	1-	-3	-3
30,48	12	1-	-2	1-	-2	-2
27,94	11	1-	-1	1-	-1	-1
25,40	10	1-	0	1-	0	0
22,86	9	-	-9	-	-9	-9
20,32	8	-	-8	-	-8	-8
17,78	7	-	-7	-	-7	-7
15,24	6	-	-6	-	-6	-6
12,70	5	-	-5	-	-5	-5
10,16	4	-	-4	-	-4	-4
7,62	3	-	-3	-	-3	-3
5,08	2	-	-2	-	-2	-2
2,54	1	-	-1	-	-1	-1

AMP do BRASIL LTDA
São Paulo, Brasil

AMP MOD II PIN HEADER, DOUBLE ROW STRAIN (Round Post)

C 880160/161/162