

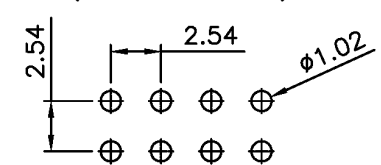


**Recommended P.C.Board Layout**  
(Tolerance:±0.05)

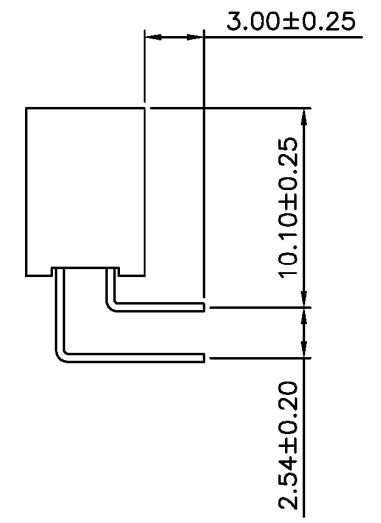

**SPECIFICATIONS**

- Current rating: 3 amps
- Contact material: Phosphor bronze
- Contact plating: Tin, gold, or duplex
- Contact resistance: 20 milliohms max.
- Insulation material: Polyester PBT, UL94V-0
- Insulation resistance: 1,000 megohms min.
- Withstanding: 600 VDC/VAC for 1 min.
- Operating temperature: -40°C to +105°C

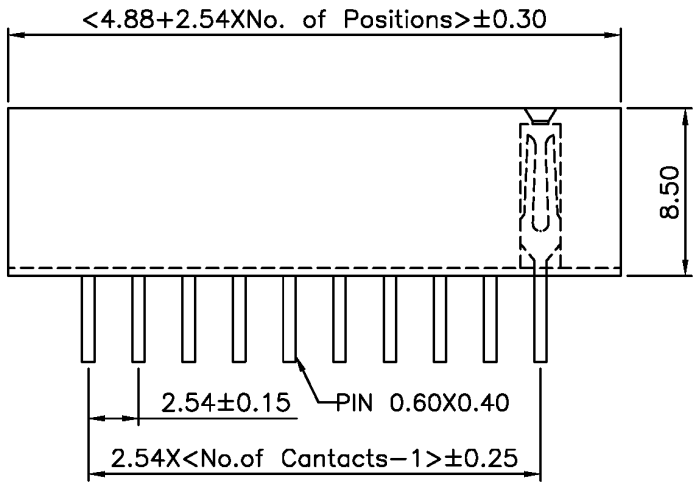

Series	Rows	Options	Contacts	Plating	Special Options
ARS	XX	XX	XX	XX	XX
Receptacle strip	01=Single row 02=Dual row 03=Single row R/A 04=Dual row R/A XR=End positions removed	[blank]=None DE=Dual entry BE=Bottom entry SE=Side entry	Single row: 3-36 Dual row: 6-72	TN=Tin GD=Gold SG=Duplex	[blank]=None SM=Surface mount RT=Retention tails P=Polarized

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/27/07
				Checked	Lizzy	09/27/07
				Drawn	Tina	09/27/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
440 Lincoln Blvd., Middlesex, New Jersey 08846  
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ARS-04XR-XX-XX-X**

Description: Receptacle strip, .100" pitch, dual row, right angle, unpolarized, 4 end positions removed