.079 [2.00] SOCKET, DUAL ENTRY



Specifications

Current Rating: Insulator Resistance: Contact Resistance:

1 Amps 5000 Megohms min

Dielectric Withstanding: AC 500V Operating Temperature: -40° ~± 105° C Contact Material: Insulator Material:

20m ohm max Phosphor Bronze Phosphor Bronze

Finish:

Polyester, UL 94V-0 See Contact Plating







Recognized under the recognized component Program of Underwriters Laboratories, Inc.


Products specifications are subject to be changed without notice.

For drawings, technical data or samples, contact E.C.S. at (714) 895-6351

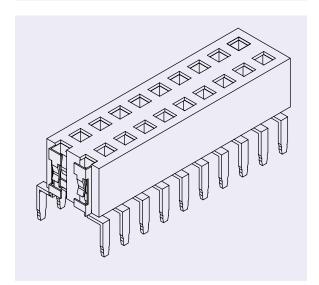

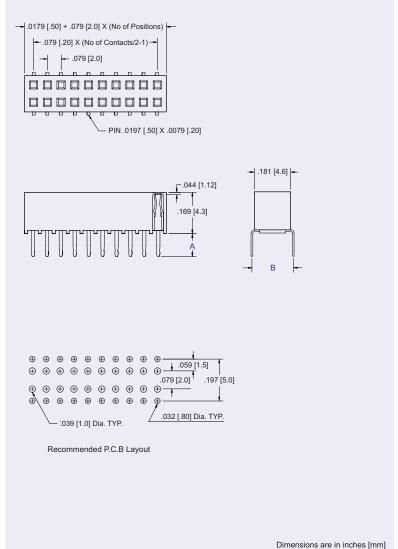



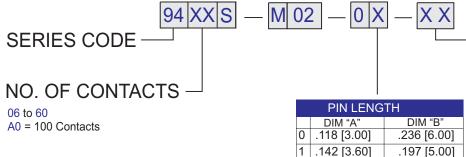

CONTACT PLATING

Lead Free & RoHS Compliant

.000050" Nickel underplate CONTACT ŤAIL

03 = Gold Flash $80 = 10\mu$ " Gold $85 = 15\mu$ " Gold

 $90 = 30\mu$ " Gold 70 = Tin Plated 75 = Au Flash

100µ" Tin 100μ" Tin 100μ" Tin 100μ" Tin $15 = 10\mu$ " Au $25 = 15\mu$ " Au $35 = 30\mu$ " Au

CONSULT FACTORY FOR CONNECTORS BUILT TO YOUR DESIGN