



**MOTOROLA**

# TYPES SN54ALS15, SN74ALS15 TRIPLE 3-INPUT POSITIVE-AND GATES WITH OPEN-COLLECTOR OUTPUTS

000215

*VSS 1702 1234*


*4/30*

## description

These devices contain three independent 3-input AND gates with open-collector outputs. These gates perform the boolean functions  $Y = A \cdot B \cdot C$  or  $Y = \overline{A} + \overline{B} + \overline{C}$  in positive logic. The open-collector outputs require pull-up resistors to perform correctly. They may be connected to other open-collector outputs to implement active-low wired-OR or active-high wired-AND functions. Open-collector devices are often used to generate higher  $V_{OH}$  levels.

The SN54ALS15 is characterized for operation over the full military range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN74ALS15 is characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .

(TOP VIEW)

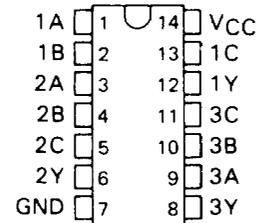


J Suffix—Case 632-07 (Ceramic)  
N Suffix—Case 646-05 (Plastic)

FUNCTION TABLE (each gate)

INPUTS			OUTPUT
A	B	C	Y
H	H	H	H
L	X	X	L
X	L	X	L
X	X	L	L

## logic symbol

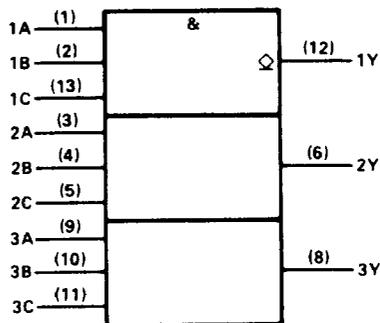

Pin numbers shown are for J and N packages.

Portions of this data sheet are reprinted with permission from the Texas Instruments 1983 ALS/AS Logic Circuits Data Book.

# TYPES SN54ALS15, SN74ALS15

## TRIPLE 3-INPUT POSITIVE-AND GATES

### WITH OPEN-COLLECTOR OUTPUTS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, $V_{CC}$ .....	7 V
Input voltage .....	7 V
Off-state output voltage .....	7 V
Operating free-air temperature range: SN54ALS15 .....	-55 °C to 125 °C
SN74ALS15 .....	0 °C to 70 °C
Storage temperature range .....	-65 °C to 150 °C

recommended operating conditions

		SN54ALS15			SN74ALS15			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
$V_{CC}$	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
$V_{IH}$	High-level input voltage	2			2			V
$V_{IL}$	Low-level input voltage			0.8			0.8	V
$V_{OH}$	High-level output voltage			5.5			5.5	V
$I_{OL}$	Low-level output current			4			8	mA
$T_A$	Operating free-air temperature	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	SN54ALS15			SN74ALS15			UNIT
		MIN	TYP†	MAX	MIN	TYP†	MAX	
$V_{IK}$	$V_{CC} = 4.5 V$ , $I_I = -18 mA$			-1.5			-1.5	V
$I_{OH}$	$V_{CC} = 4.5 V$ , $V_{OH} = 5.5 V$			0.1			0.1	mA
$V_{OL}$	$V_{CC} = 4.5 V$ , $I_{OL} = 4 mA$		0.25	0.4		0.25	0.4	V
	$V_{CC} = 4.75 V$ , $I_{OL} = 8 mA$					0.35	0.5	
$I_I$	$V_{CC} = 5.5 V$ , $V_I = 7 V$			0.1			0.1	mA
$I_{IH}$	$V_{CC} = 5.5 V$ , $V_I = 2.7 V$			20			20	μA
$I_{IL}$	$V_{CC} = 5.5 V$ , $V_I = 0.4 V$			-0.1			-0.1	mA
$I_{CCH}$	$V_{CC} = 5.5 V$ , $V_I = 4.5 V$			1.8			1.8	mA
$I_{CCL}$	$V_{CC} = 5.5 V$ , $V_I = 0 V$			3.3			3.3	mA

†All typical values are at  $V_{CC} = 5 V$ ,  $T_A = 25 °C$ .

switching characteristics

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 5 V$ , $C_L = 15 pF$ , $R_L = 2 k\Omega$ , $T_A = 25 °C$		$V_{CC} = 4.5 V$ to $5.5 V$ , $C_L = 50 pF$ , $R_L = 2 k\Omega$ , $T_A = MIN$ to $MAX$		UNIT	
			'ALS15		SN74ALS15			
			TYP	MIN	MAX	MIN		MAX
$t_{PLH}$	Any	Y	15	6	30	6	30	ns
$t_{PHL}$	Any	Y	15	6	35	6	35	ns

Motorola reserves the right to make changes to any products herein to improve reliability, function or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.



**MOTOROLA Semiconductor Products Inc.**

P.O. BOX 20912 • PHOENIX, ARIZONA 85036 • A SUBSIDIARY OF MOTOROLA INC