



Datasheet

Rochester Electronics Manufactured Components

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All recreations are done with the approval of the OCM.

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceed the OCM data sheet.

Quality Overview

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-35835
 - Class Q Military
 - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
- Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OEM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

SN5413, SN54LS13, SN7413, SN74LS13
DUAL 4-INPUT
POSITIVE-NAND SCHMITT TRIGGERS
 DECEMBER 1983—REVISED MARCH 1988

- Operation from Very Slow Edges
- Improved Line-Receiving Characteristics
- High Noise Immunity


description

Each circuit functions as a 4-input NAND gate, but because of the Schmitt action, it has different input threshold levels for positive (V_{T+}) and for negative going (V_{T-}) signals.

These circuits are temperature-compensated and can be triggered from the slowest of input ramps and still give clean, jitter-free output signals.


The SN5413 and SN54LS13 are characterized for operation over the full military temperature range of -55°C to 125°C . The SN7413 and SN74LS13 are characterized for operation from 0°C to 70°C .

logic symbol[†]

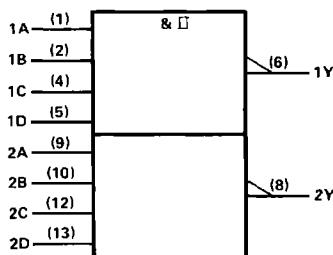


[†]This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-13
 Pin numbers shown are for D, J, N, and W packages.

SN5413, SN54LS13 . . . J OR W PACKAGE
 SN7413 . . . N PACKAGE
 SN74LS13 . . . D OR N PACKAGE
 (TOP VIEW)




SN54LS13 . . . FK PACKAGE
 (TOP VIEW)

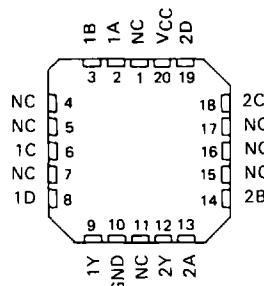

NC—No internal connection

logic diagram (positive logic)



2


TTL Devices

**SN5413, SN54LS13, SN7413, SN74LS13
DUAL 4-INPUT
POSITIVE-NAND SCHMITT TRIGGERS**

schematics

2

TTL Devices

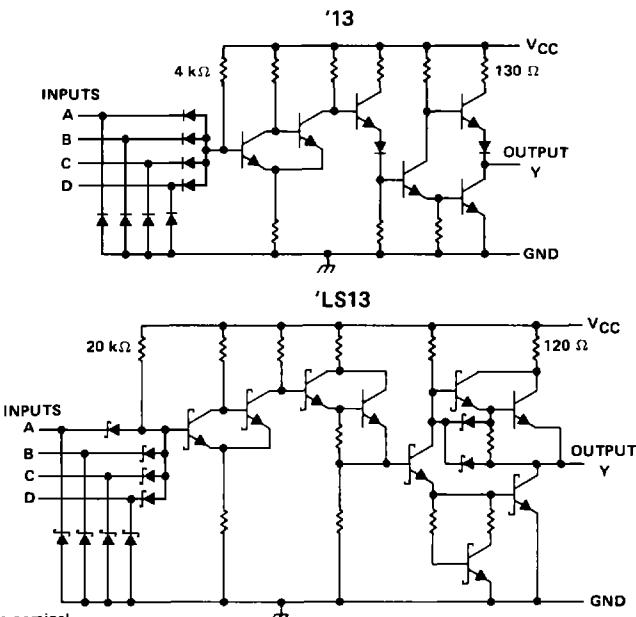

Resistor values are nominal.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V _{CC} (see Note 1)	7 V
Input voltage: '13	5.5 V
'LS13	7 V
Operating free-air temperature: SN54'	- 55°C to 125°C
SN74'	0°C to 70°C
Storage temperature range	- 65°C to 150°C

NOTE 1. Voltage values are with respect to network ground terminal.

**SN5413, SN7413
DUAL 4-INPUT
POSITIVE-NAND SCHMITT TRIGGERS**

recommended operating conditions

	SN5413			SN7413			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC} Supply voltage	4.5	5	5.5	4.75	5	5.25	V
I _{OH} High-level output current			-0.8			-0.8	mA
I _{OL} Low-level output current			16			16	mA
T _A Operating free-air temperature	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS [†]		MIN	TYP [‡]	MAX	UNIT	
	V _{T+}	V _{T-}					
V _{T+}	V _{CC} = 5 V		1.5	1.7	2	V	
V _{T-}	V _{CC} = 5 V		0.6	0.9	1.1	V	
Hysteresis (V _{T+} - V _{T-})	V _{CC} = 5 V		0.4	0.8		V	
V _{IK}	V _{CC} = MIN, I _I = -12 mA				-1.5	V	
V _{OH}	V _{CC} = MIN, V _I = 0.6 V, I _{OH} = -0.8 mA		2.4	3.4		V	
V _{OL}	V _{CC} = MIN, V _I = 2 V, I _{OL} = 16 mA			0.2	0.4	V	
I _{T+}	V _{CC} = 5 V, V _I = V _{T+}			-0.65		mA	
I _{T-}	V _{CC} = 5 V, V _I = V _{T-}			-0.85		mA	
I _I	V _{CC} = MAX, V _I = 5.5 V				1	mA	
I _{IH}	V _{CC} = MAX, V _{IH} = 2.4 V				40	μA	
I _{IL}	V _{CC} = MAX, V _{IL} = 0.4 V			-1	-1.6	mA	
I _{OS} [§]	V _{CC} = MAX,			-18	-55	mA	
I _{CCH}	V _{CC} = MAX				14	mA	
I _{CCL}	V _{CC} = MAX				20	32	mA

[†] For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

[‡] All typical values are at V_{CC} = 5 V, T_A = 25°C.

[§] Not more than one output should be shorted at a time.

switching characteristics, V_{CC} = 5 V, T_A = 25°C

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Any	Y					
t _{PLH}			R _L = 400 Ω, C _L = 15 pF	18	27		ns
t _{PHL}				15	22		ns

2

TTL Devices



POST OFFICE BOX 655012 • DALLAS TEXAS 75265

SN54LS13, SN74LS13
DUAL 4-INPUT
POSITIVE-NAND SCHMITT TRIGGERS

recommended operating conditions

		SN54LS13			SN74LS13			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5	5.5	4.75	5	5.25	V
I _{OH}	High-level output current			-0.4			-0.4	mA
I _{OL}	Low-level output current			4			8	mA
T _A	Operating free-air temperature	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS ^t	SN54LS13			SN74LS13			UNIT
		MIN	TYP [#]	MAX	MIN	TYP [#]	MAX	
V _{T+}	V _{CC} = 5 V	1.4	1.6	1.9	1.4	1.6	1.9	V
V _{T-}	V _{CC} = 5 V	0.5	0.8	1	0.5	0.8	1	V
Hysteresis (V _{T+} - V _{T-})	V _{CC} = 5 V	0.4	0.8		0.4	0.8		V
V _{IK}	V _{CC} = MIN, I _I = -18 mA			-1.5			-1.5	V
V _{OH}	V _{CC} = MIN, V _I = 0.5 V, I _{OH} = -0.4 mA	2.5	3.4		2.7	3.4		V
V _{OL}	V _{CC} = MIN, V _I = 1.9 V	I _{OL} = 4 mA	0.25	0.4	0.25	0.4		V
			I _{OL} = 8 mA			0.35	0.5	
I _{T+}	V _{CC} = 5 V, V _I = V _{T+}		-0.14			-0.14		mA
I _{T-}	V _{CC} = 5 V, V _I = V _{T-}		-0.18			-0.18		mA
I _I	V _{CC} = MAX, V _I = 7 V			0.1			0.1	mA
I _{IH}	V _{CC} = MAX, V _{IH} = 2.7 V			20			20	μA
I _{IL}	V _{CC} = MAX, V _{IL} = 0.4 V			-0.4			-0.4	mA
I _{OS} [§]	V _{CC} = MAX		-20	-100	-20	-100		mA
I _{CCH}	V _{CC} = MAX			2.9	6		2.9	6 mA
I _{CCL}	V _{CC} = MAX			4.1	7		4.1	7 mA

^t For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

[#] All typical values are at V_{CC} = 5 V, T_A = 25°C.


[§] Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

switching characteristics, V_{CC} = 5 V, T_A = 25°C

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t _{PLH}	Any	Y	R _L = 2 kΩ, C _L = 15 pF	15	22	ns	
t _{PHL}				18	27	ns	

**SN5413, SN54LS13, SN7413, SN74LS13
DUAL 4-INPUT
POSITIVE-NAND SCHMITT TRIGGERS**

PARAMETER MEASUREMENT INFORMATION

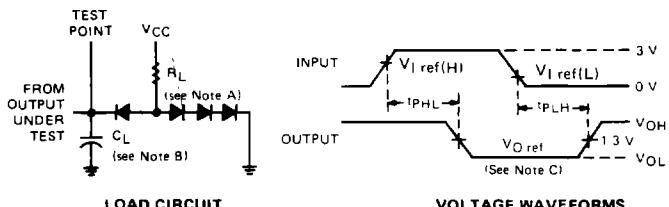

LOAD CIRCUIT

VOLTAGE WAVEFORMS

NOTES
 A. All diodes are 1N3064 or equivalent.
 B. C_L includes probe and jig capacitance.
 C. Generator characteristics and reference voltages are

	Generator Characteristics			Reference Voltages			
	Z_{out}	PRR	t_r	t_f	$V_I \text{ ref(H)}$	$V_I \text{ ref(L)}$	$V_O \text{ ref}$
SN5413/SN7413	50 Ω	1 MHz	10 ns	10 ns	1.7 V	0.9 V	1.5 V
SN54LS13/SN74LS13	50 Ω	1 MHz	15 ns	6 ns	1.6 V	0.8 V	1.3 V

2

TTL Devices

TYPICAL CHARACTERISTICS OF '13 CIRCUITS

POSITIVE-GOING THRESHOLD VOLTAGE
vs
FREE-AIR TEMPERATURE

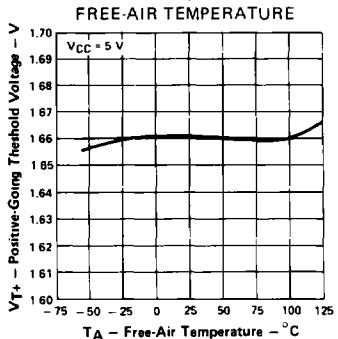


FIGURE 1

NEGATIVE-GOING THRESHOLD VOLTAGE
vs
FREE-AIR TEMPERATURE

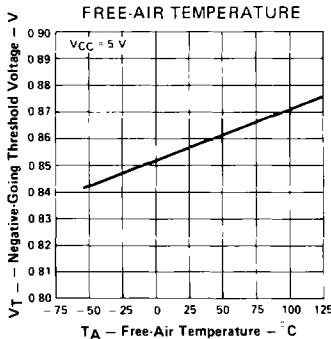


FIGURE 2

HYSTeresis

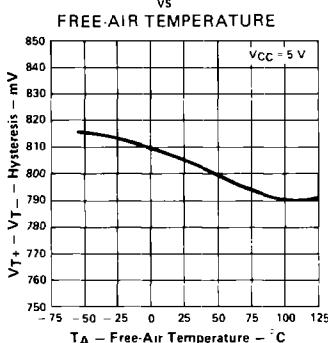


FIGURE 3

Data for temperatures below 0°C and 70°C and supply voltages below 4.75 V and above 5.25 V are applicable for SN5413 only.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

**SN5413, SN7413
DUAL 4-INPUT
POSITIVE-NAND SCHMITT TRIGGERS**

2

TTL Devices

TYPICAL CHARACTERISTICS OF '13 CIRCUITS

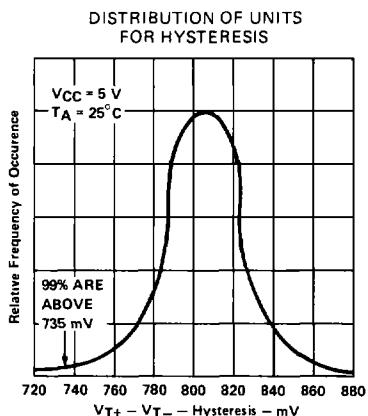


FIGURE 4

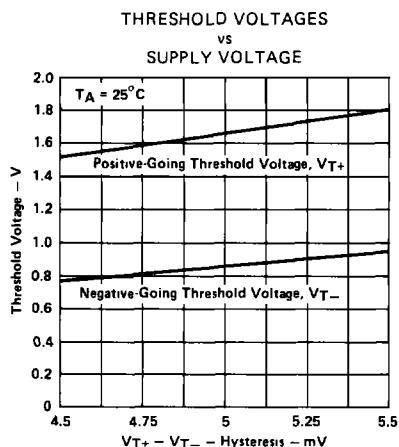


FIGURE 5

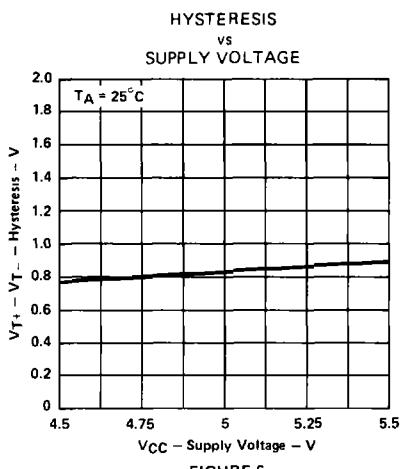


FIGURE 6

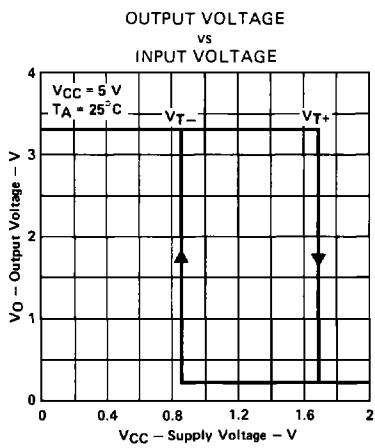


FIGURE 7

Data for temperatures below 0°C and 70°C and supply voltages below 4.75 V and above 5.25 V are applicable for SN5413 only.

**SN54LS13, SN74LS13
DUAL 4-INPUT
POSITIVE-NAND SCHMITT TRIGGERS**

TYPICAL CHARACTERISTICS OF 'LS13 CIRCUITS

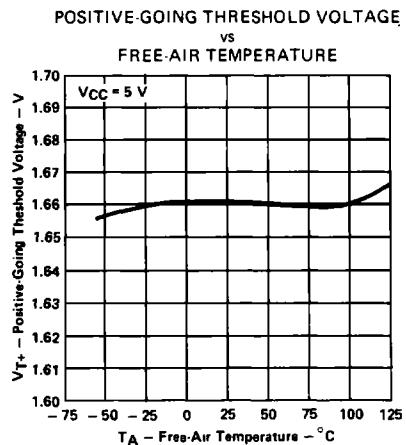


FIGURE 8

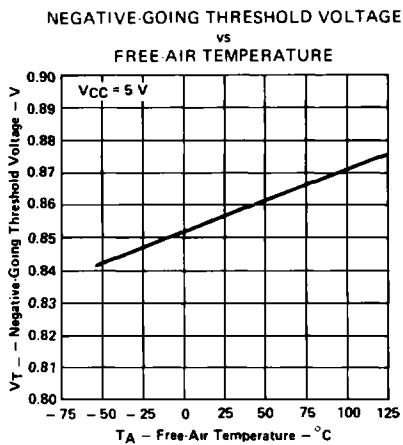


FIGURE 9

2

TTL Devices

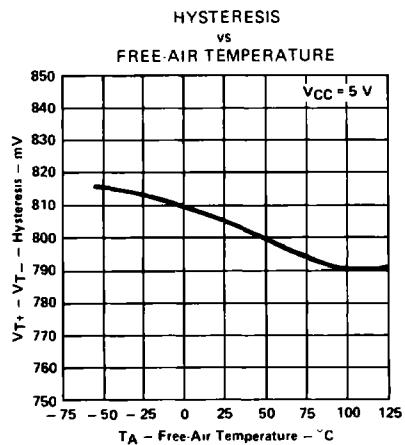


FIGURE 10

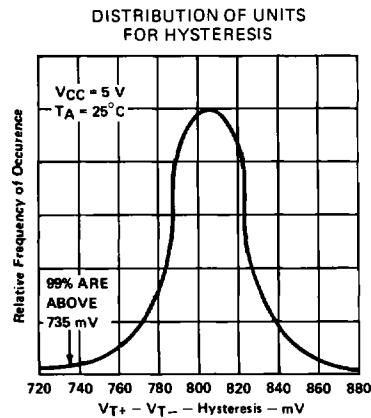


FIGURE 11

Data for temperatures below 0°C and above 70°C and supply voltages below 4.75 V and above 5.25 V are applicable for SN54LS13 only.

**SN54LS13, SN74LS13
DUAL 4-INPUT
POSITIVE-NAND SCHMITT TRIGGERS**

2

TTL Devices

TYPICAL CHARACTERISTICS OF 'LS13 CIRCUITS

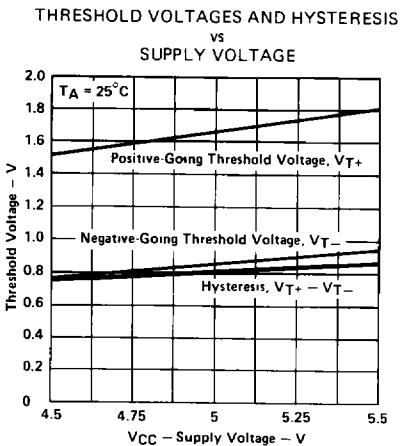


FIGURE 12


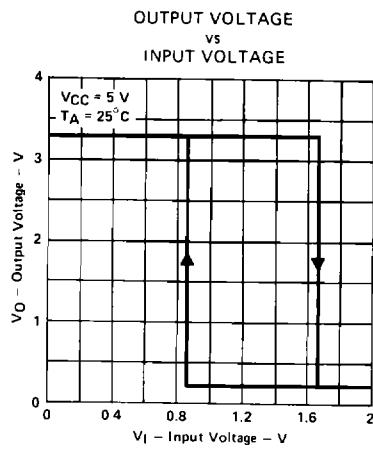


FIGURE 13

Data for temperatures below $0^\circ C$ and above $70^\circ C$ and supply voltages below 4.75 V and above 5.25 V are applicable for SN54LS13 only.

**SN5413, SN54LS13, SN7413, SN74LS13
DUAL 4-INPUT
POSITIVE-NAND SCHMITT TRIGGERS**

TYPICAL APPLICATION DATA

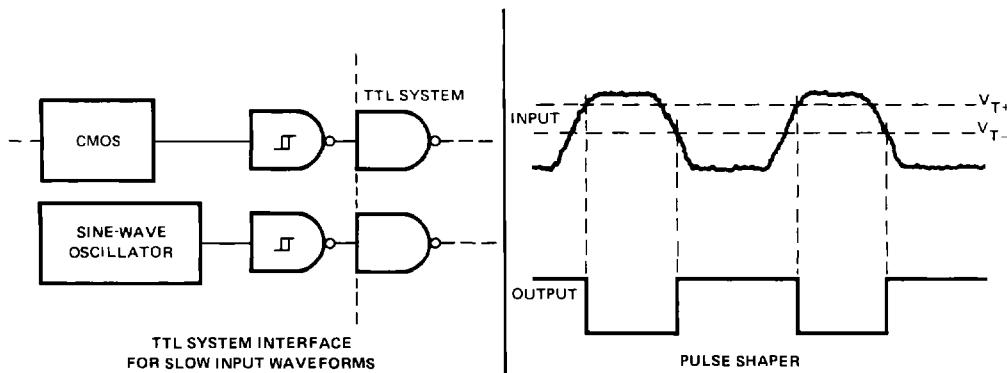

2

TTL Devices

