
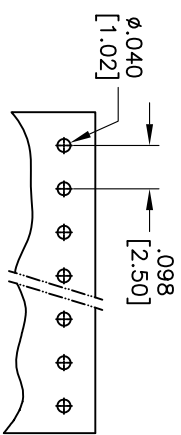

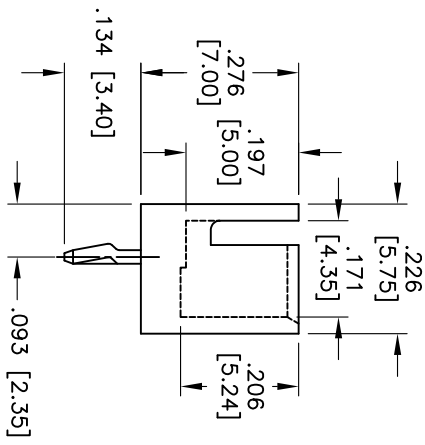
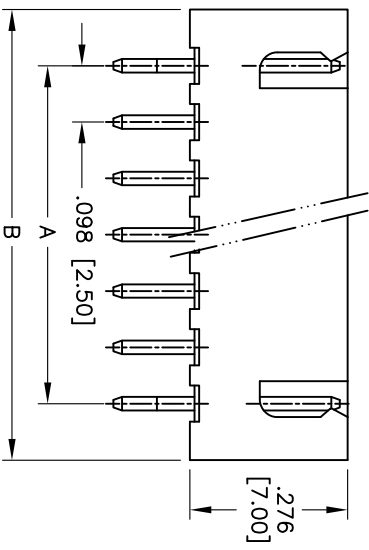


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/10	

APPROVED: _____
 DATE: _____ TITLE: _____

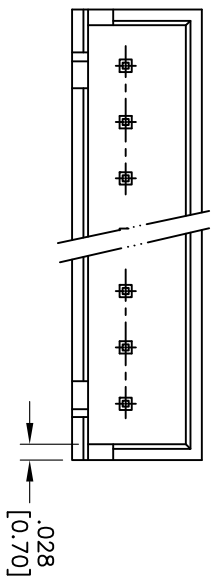

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Contact: Brass

Plating:

Matt Tin over Nickel underplate overall

Electrical:

Operating voltage: 250V AC/DC

Current rating: 3A AC/DC

Insulation resistance: 1,000Mohms min.

Withstand voltage: 1000V AC for 1 minute.

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

Recommended Soldering 235°C 5 sec.

Positions: 2 thru 16
 A = .098 [2.50] x No. of Spaces
 B = .098 [2.50] x No. of Spaces + .197 [5.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes ±.10 ±.020 ±.015
 .XX ±.020 ±.015
 .XXX ±.015 ±.010

APPROVALS	DATE
DRAWN	11/16/10
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE TO BOARD PITCH: 2.5MM
 WAFER STRAIGHT TYPE W/ KINK

SIZE	PART NO.	REV.
X	25SH-B-XX-MTS	-

REF: S00163T SCALE: NTS SHEET 1 OF 1

