

## Surface Mount Power Voltage-Regulating Diodes



DO-214AA (SMBJ)

### FEATURES

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- Low Zener impedance
- Low regulation factor
- Meets MSL level 1, per J-STD-020C, LF max peak of 260 °C
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



### TYPICAL APPLICATIONS

For general purpose regulation and protection applications.

### MECHANICAL DATA

**Case:** DO-214AA (SMBJ)

Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade, HE3 suffix for high reliability grade (AEC Q101 qualified)

**Polarity:** Color band denotes cathode end

### MAJOR RATINGS AND CHARACTERISTICS

$V_Z$	9.1 V to 68 V
$P_D$	1.5 W
$I_R (V_Z \geq 12 \text{ V})$	5.0 $\mu\text{A}$
$T_j \text{ max.}$	150 °C

### MAXIMUM RATINGS ( $T_A = 25 \text{ }^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Operating junction and storage temperature range	$T_J, T_{STG}$	- 55 to + 150	°C

<b>ELECTRICAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)									
PART NUMBER	DEVICE MARKING CODE	NOMINAL ZENER VOLTAGE $V_Z$ AT $I_{ZT}$ (V)	TEST CURRENT $I_{ZT}$ (mA)	MAX. ZENER IMPEDANCE LEAKAGE CURRENT			MAX. REVERSE CURRENT $I_R$ AT $V_R$		MAX. ZENER CURRENT $I_{ZM}$ (mA)
				$Z_{ZT}$ AT $I_{ZT}$	$Z_{ZK}$ AT $I_{ZK}$		$I_R$ ( $\mu\text{A}$ )	$V_R$ (V)	
					( $\Omega$ )	( $\Omega$ )			
SMZJ3788A,B	VK,L	9.1	41.2	4.0	1000	0.50	50	7.0	140
SMZJ3789A,B	WA,B	10	37.5	5.0	1000	0.25	50	7.6	125
SMZJ3790A,B	WC,D	11	34.1	6.0	650	0.25	10	8.4	115
SMZJ3791A,B	WE,F	12	31.2	7.0	550	0.25	5.0	9.1	105
SMZJ3792A,B	WG,H	13	28.8	7.5	550	0.25	5.0	9.9	98
SMZJ3793A,B	WI,J	15	25.0	9.0	600	0.25	5.0	11.4	85
SMZJ3794A,B	WK,L	16	23.4	10.0	600	0.25	5.0	12.2	80
SMZJ3795A,B	XA,B	18	20.8	12.0	650	0.25	5.0	13.7	70
SMZJ3796A,B	XC,D	20	18.7	14.0	650	0.25	5.0	15.2	62
SMZJ3797A,B	XE,F	22	17.0	17.5	650	0.25	5.0	16.7	56
SMZJ3798A,B	XG,H	24	15.6	19.0	700	0.25	5.0	18.2	51
SMZJ3799A,B	XI,J	27	13.9	23.0	700	0.25	5.0	20.6	46
SMZJ3800A,B	XK,L	30	12.5	26.0	750	0.25	5.0	22.8	41
SMZJ3801A,B	YA,B	33	11.4	33.0	800	0.25	5.0	25.1	38
SMZJ3802A,B	YC,D	36	10.4	38.0	850	0.25	5.0	27.4	35
SMZJ3803A,B	YE,F	39	9.6	45.0	900	0.25	5.0	29.7	31
SMZJ3804A,B	YG,H	43	8.7	53.0	950	0.25	5.0	32.7	28
SMZJ3805A,B	YI,J	47	8.0	67.0	1000	0.25	5.0	35.8	26
SMZJ3806A,B	YK,L	51	7.3	70.0	1100	0.25	5.0	38.8	24
SMZJ3807A,B	ZA,B	56	6.7	86.0	1300	0.25	5.0	42.6	22
SMZJ3808A,B	ZC,D	62	6.0	100.0	1500	0.25	5.0	47.1	20
SMZJ3809A,B	ZE,F	68	5.5	120.0	1700	0.25	5.0	51.7	18

**Note:**

- (1) Standard voltage tolerance is  $\pm 20\%$ , suffix "A" denotes  $\pm 10\%$  and suffix "B" denotes  $\pm 5\%$
- (2) Maximum steady state power dissipation is 1.5 W at  $T_L = 75\text{ }^\circ\text{C}$  (see Fig. 1)

<b>ORDERING INFORMATION</b>				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
SMZJ3788A-E3/52	0.096	52	750	7" Diameter Plastic Tape & Reel
SMZJ3788A-E3/5B	0.096	5B	3200	13" Diameter Plastic Tape & Reel

## RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

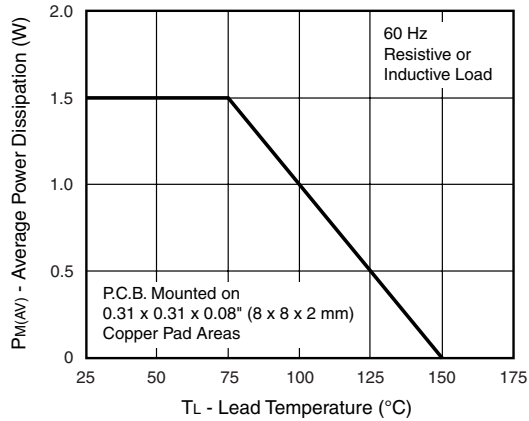


Figure 1. Maximum Continuous Power Dissipation

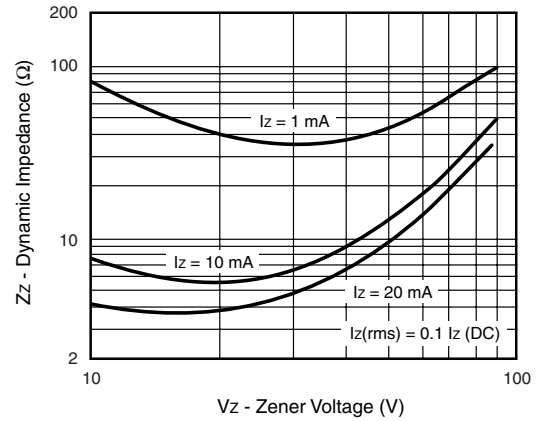


Figure 3. Typical Zener Impedance

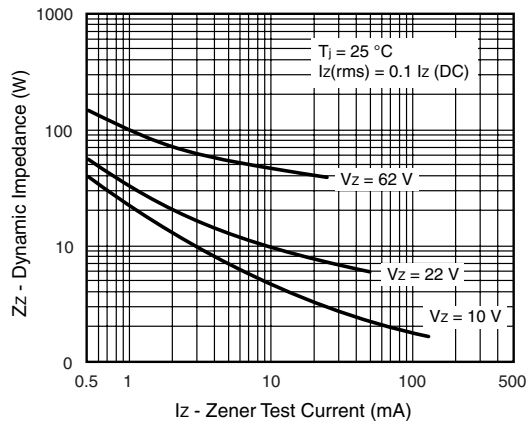


Figure 2. Typical Zener Impedance


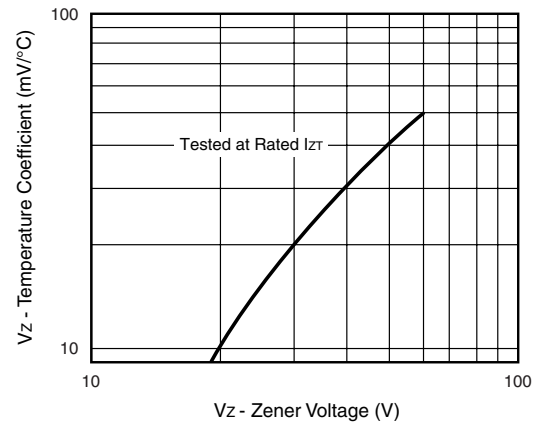


Figure 4. Typical Temperature Coefficients

## PACKAGE OUTLINE DIMENSIONS in inches (millimeters)



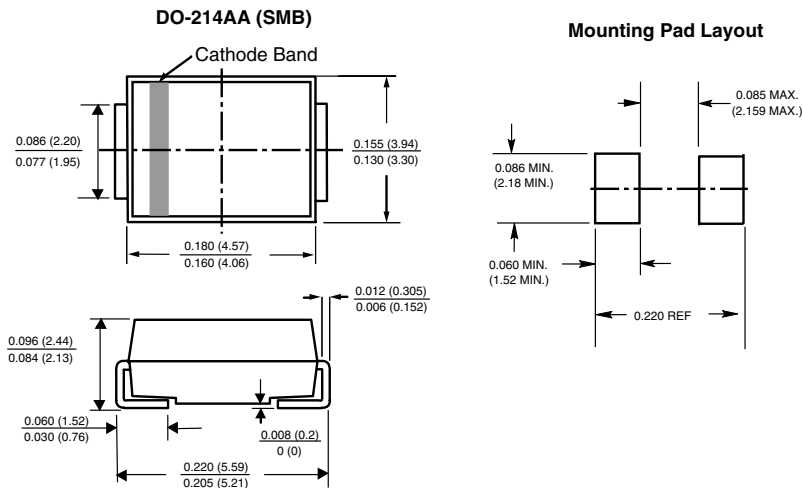

## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.