

# RED INDICATES ORIGINAL


DWG SIZE: C  
 DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS, INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR REPRODUCTION OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REVISIONS			3-0207	SH 1	
REV	ED	DESCRIPTION	DWN	APPROVED	DATE
M	12085	-308 TAI-218 WAS TAI-168; ADDED -308 & -309; SEE ECO	DKC	KIJM (a)	8/26/97

DASH NO	CABLES ACCOMMODATED	A HEX	B DIM	C MAX	ASSEMBLE PER
-201	M17/176-00002	.344	.030	1.80	TAI-168
-202	TWC-78-1				
-203	TWC-124-1A				
-204	10602, RAYCHEM				
-205	TWAC-78-1F2				
-206	782800130, RAYCHEM				
-207	83310, BELDEN				
-208	202-3927, MICRODOT				
-209	202-3942, MICRODOT				
-210	8451, BELDEN				
-211	202-3934, MICRODOT				
-212	2524E0114, RAYCHEM				
-213	TWC-78-2				
-214	TWC-124-2				
-215	BL982, TIMES				
-216	BL1242, TIMES				
-217	GC875M24H, GRUMMAN				
-218	EDP221888, RAYCHEM				
-219	252601114, RAYCHEM				
-220	GC875RR1, GRUMMAN				
-221	10614, RAYCHEM				
-222	10613, RAYCHEM				
-223	HMS2-1149, HUGHES				
-209		1.55	TAI-138		
-210					
-211					
-212					
-213					
-214					
-215					
-216					
-217					
-218					
-219					
-220					
-221					
-222					
-223					
-209		1.80	TAI-168		
-210					
-211					
-212					
-213					
-214					
-215					
-216					
-217					
-218					
-219					
-220					
-221					
-222					
-223					

DASH NO	CABLES ACCOMMODATED	A HEX	B DIM	C MAX	ASSEMBLE PER		
-301	GC875GC1, GRUMMAN	.344	.030	1.80	TAI-168		
-302	GC875GB1, GRUMMAN						
-303	7528A5314, RAYCHEM						
-304							
-305	M17/177-00001, THERMATICS						
-306	TRC-50-2						
-307	M17/134-00002						
-308	TRC-75-1						
-309	TRC-75-2						
-309	TRC-50-1						
-306		1.80	TAI-218				
-307							
-308							
-309							
-306				1.80	TAI-168		
-307							
-308							
-309							
-306						1.80	TAI-218
-307							
-308							
-309							

INCH	MM
.005	0.13
.010	0.25
.030	0.76
.106	2.77
.218	5.54
.221	5.61
.344	8.74
.505	12.83
.510	12.95
.625	15.88
.687	17.45
1.00	25.40
1.25	31.75
1.416	35.97
1.55	39.37
1.75	44.45
1.80	45.72

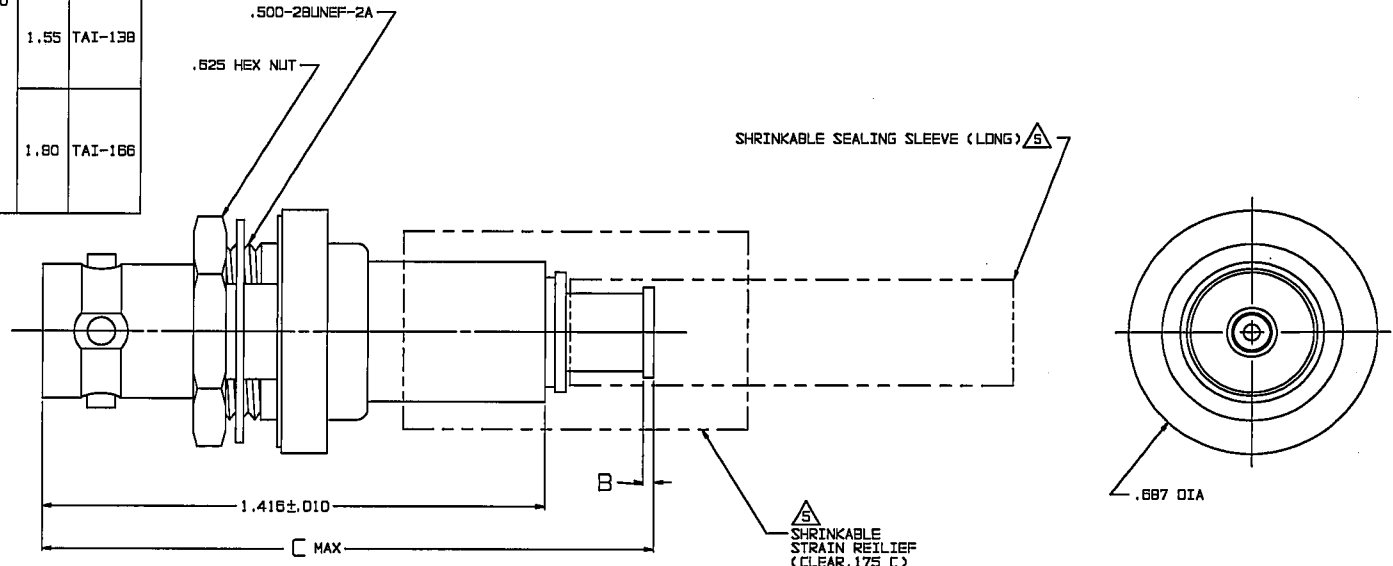


-202 SHOWN

- 1 SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED LOOSE AS FOLLOWS:
- CABLE GROUPS -201 THROUGH -210, -217 THROUGH -303, -305, -307 & -308
    - 1 SHRINKABLE STRAIN RELIEF (1.00 LONG)
    - 1 SHRINKABLE SEALING SLEEVE (1.25 LONG)
  - CABLE GROUPS -211 THROUGH -216, -306 & -308
    - 1 SHRINKABLE STRAIN RELIEF (1.75 LONG)
4. MAX PANEL THK .109
3. 4-LUG CONCENTRIC TWINAX/TRIAX TRB, FULL CRIMP BULKHEAD MOUNT CABLE RECEPTACLE
2. FINISH: TFS-1A (NICKEL)
1. ALL DIMENSIONS ARE IN INCHES

6. EXAMPLE OF COMPLETE MODEL NO:  
 BJ79CFL-201

BASIC MODEL NO [ ] CABLE GROUP DASH NO [ ]

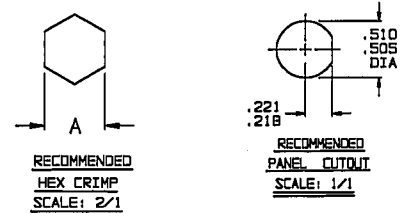

QTY	DESCRIPTION	PART NUMBER	ITEM
TOL UNLESS SPECIFIED .004 ± .006 ± .0000 ± ANGLES	TROMPETER ELECTRONICS, INC.	BJ79CFL	
DWN	DKC 8-1-87	MATERIAL	CODE IDENT
CHK	TAJM 8-18-87	14849	3-0207
ENGR			
APPR			
NEXT ASSY	SCALE 4/1	DATE 11/11/86	SHEET 1 OF 2