


Female Header for Power Applications 5,08 mm

Series

593



| | |
|-------------------------|--|
| Rated current | 8,2 A |
| Rated voltage | 250 V _{RMS} / V _{DC} |
| Withstand voltage | 500 V _{RMS} for one minute |
| Material contact | Copper alloy |
| Material insulator | High temp. thermoplast UL94V-0 |
| Operating temperature | -40°C to +105°C |
| Max. processing temper. | 260°C for 10 seconds |


| | |
|-----------------|--------------------------------------|
| pitch | 5,08 |
| termination | |
| mating pin size | <input type="checkbox"/> 1,14 |
| max. pincount | 020 |

All dimensions in mm.



Variation

PCB Layout


Product group
4

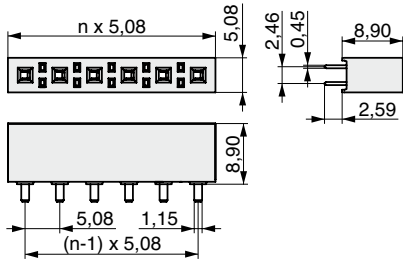

1

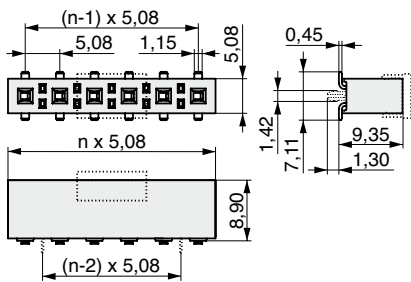

2



Positioning peg:
0 = Without peg
1 = With peg

Plating:
T = Sn
F = Au

Cap:
0 = Without cap
1 = With cap

Variation (1,2)

No. of contacts
(002,... - 020)

Positioning peg (0,1)

Plating contact (T,F)

Cap (0,1)



www.mpe-connector.de

Order code:

593 - 2 - 222 - 2 - N 2 X - RS 2

MPE-Garry GmbH • Schafflerstraße 13 • 87629 Füssen • Germany • Phone: +49 (0) 83 62 / 91 56-0 • Fax: +49 (0) 83 62 / 91 56-500 • Email: vk@mpe-connector.de • www.mpe-connector.de