


SPECIFICATIONS

Current Rating: #20:5A, #22:5A, #24:4A, #26:3A, #28:2A, #30:1A
 Voltage Rating: 250V AC, DC
 Housing Material: Nylon 66, UL94V-0
 Insulation Resistance: 1000MΩ Min.
 Withstanding: 1500V AC
 Temperature Rise: 30°C Max.

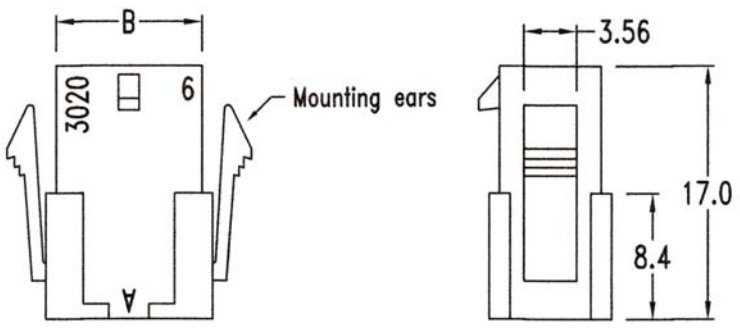

Series	Style	Positions	Options
JS-A	3020	XX	X
Crimp Terminal .118" Pitch	Style=3020	See Chart	Blank=none E=w/ Mounting Ears

Dimensions									
Circuits	A	B	C	D	Circuits	A	B	C	D
2		4.0	4.21	7.90	14	18.0	22.0	22.20	25.88
4	3.0	7.0	7.21	10.90	16	21.0	25.0	25.20	28.88
6	6.0	10.0	10.21	13.89	18	24.0	28.0	28.20	31.88
8	9.0	13.0	13.21	16.89	20	27.0	31.0	31.22	34.87
10	12.0	16.0	16.21	19.89	22	30.0	34.0	34.22	37.87
12	15.0	19.0	19.21	22.89	24	33.0	37.0	37.22	40.87

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	7/29/00
				Checked	Lizzy	7/29/00
				Drawn	Tina	7/29/00
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-3020-XX-X**

Description: .118 Dual Row Plug Housing