

## 54LS02, 54S02 Gates

Quad Two-Input NOR Gate

Product Specification

Military Logic Products

### FUNCTION TABLE

INPUTS		OUTPUT
A	B	Y
L	L	H
L	H	L
H	L	L
H	H	L

H = High voltage level  
L = Low voltage level

### ORDERING INFORMATION.

DESCRIPTION	ORDER CODE
Ceramic DIP	54LS02/BCA, 54S02/BCA
Ceramic Flat Pack	54LS02/BDA, 54S02/BDA
Ceramic LLCC	54LS02/B2A, 54S02/B2A

### INPUT AND OUTPUT LOADING AND FAN-OUT TABLE


PINS	DESCRIPTION	54S	54LS
A, B	Inputs	1SUL	1LSUL
Y	Output	10SUL	10LSUL

NOTE: Where a 54S Unit Load (SUL) is  $50\mu\text{A } I_{IH}$  and  $-2.0\text{mA } I_{IL}$ , and a 54LS Unit Load (LSUL) is  $20\mu\text{A } I_{IH}$  and  $-0.4\text{mA } I_{IL}$ .


### ABSOLUTE MAXIMUM RATINGS (Over operating free-air temperature range unless otherwise noted.)

SYMBOL	PARAMETER	54LS	54S	UNIT
$V_{CC}$	Supply voltage	7.0	7.0	V
$V_I$	Input voltage range	-0.5 to +7.0	-0.5 to +5.5	V
$I_I$	Input current range	-30 to +1	-30 to +5	mA
$V_O$	Voltage applied to output in High output state range	-0.5 to $+V_{CC}$	-0.5 to $+V_{CC}$	V
$T_{STG}$	Storage temperature range	-65 to +150	-65 to +150	$^{\circ}\text{C}$

### PIN CONFIGURATION

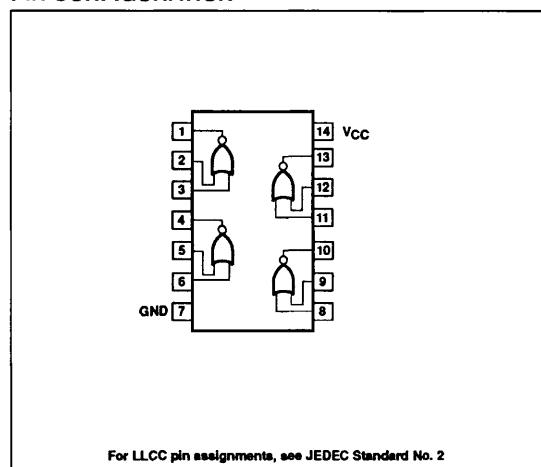

### LOGIC SYMBOL

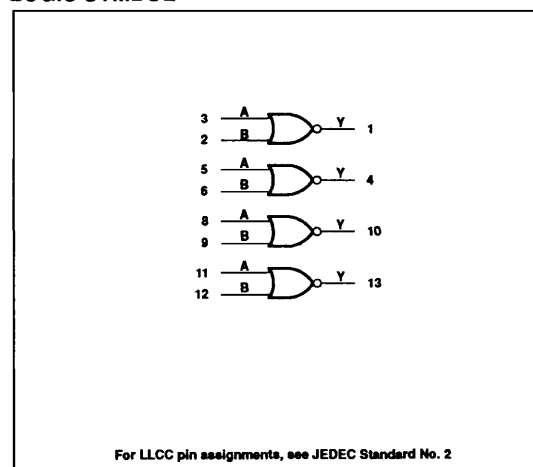

## Gates

## 54LS02, 54S02

## RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	54LS			54S			UNIT
		Min	Nom	Max	Min	Nom	Max	
V <sub>CC</sub>	Supply voltage	4.5	5.0	5.5	4.5	5.0	5.5	V
V <sub>IH</sub>	High-level input voltage	2.0			2.0			V
V <sub>IL</sub>	Low-level input voltage			+0.7			+0.8	V
			+125°C	+0.7			+0.7	V
I <sub>IK</sub>	Input clamp current			-18			-18	mA
I <sub>OH</sub>	High-level output current			-400			-1000	μA
I <sub>OL</sub>	Low-level output current			4			20	mA
T <sub>A</sub>	Operating free-air temperature range	-55		+125	-55		+125	°C

## DC ELECTRICAL CHARACTERISTICS (Over recommended operating free-air temperature range unless otherwise noted.)

SYMBOL	PARAMETER	TEST CONDITIONS <sup>1</sup>	54LS02			54S02			UNIT
			Min	Typ <sup>2</sup>	Max	Min	Typ <sup>2</sup>	Max	
V <sub>OH</sub>	High-level output voltage	V <sub>CC</sub> = Min, V <sub>IL</sub> = Max, I <sub>OH</sub> = Max	2.5	3.4		2.5	3.4		V
V <sub>OL</sub>	Low-level output voltage	V <sub>CC</sub> = Min, V <sub>IH</sub> = Min, V <sub>IL</sub> = Max		0.25	0.4			0.5	V
		I <sub>OL</sub> = Max +125°C			0.4			0.45	V
V <sub>IK</sub>	Input clamp voltage	V <sub>CC</sub> = Min, I <sub>I</sub> = I <sub>IK</sub>			-1.5			-1.2	V
I <sub>IH2</sub>	Input current at maximum input voltage	V <sub>CC</sub> = Max V <sub>I</sub> = 5.5V V <sub>I</sub> = 7.0V			0.1			1.0	mA
I <sub>IH1</sub>	High-level input current	V <sub>CC</sub> = Max, V <sub>I</sub> = 2.7V			20			50	μA
I <sub>IL</sub>	Low-level input current	V <sub>CC</sub> = Max V <sub>I</sub> = 0.4V V <sub>I</sub> = 0.5V			-0.4				mA
								-2.0	mA
I <sub>OS</sub>	Short-circuit output current <sup>3</sup>	V <sub>CC</sub> = Max	-20		-100	-40		-100	mA
I <sub>CC</sub>	Supply current (total)	V <sub>CC</sub> = Max	I <sub>CC</sub> H Outputs High	1.6	3.2		17	29	mA
			I <sub>CC</sub> L Outputs Low	2.8	5.4		26	45	mA

AC ELECTRICAL CHARACTERISTICS T<sub>A</sub> = 25°C, V<sub>CC</sub> = 5.0V

SYMBOL	PARAMETER	TEST CONDITIONS	54LS		54S		UNIT
			C <sub>L</sub> = 15pF		C <sub>L</sub> = 15pF		
			Min	Max	Min	Max	
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay	Waveform 1		15		5.5	ns
				15		5.5	ns

AC ELECTRICAL CHARACTERISTICS T<sub>A</sub> = 25°C, V<sub>CC</sub> = 5.0V<sup>4</sup>

SYMBOL	PARAMETER	TEST CONDITIONS	54LS		54S		UNIT
			C <sub>L</sub> = 50pF		C <sub>L</sub> = 50pF		
			Min	Max	Min	Max	
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay	Waveform 1		20		7.0	ns
				20		7.0	ns

# Gates

# 54LS02, 54S02


## AC ELECTRICAL CHARACTERISTICS $T_A = -55^\circ\text{C}$ and $+125^\circ\text{C}$ , $V_{CC} = 5.0\text{V}^4$

SYMBOL	PARAMETER	TEST CONDITIONS	54LS		54S		UNIT
			$C_L = 50\text{pF}$		$C_L = 50\text{pF}$		
			Min	Max	Min	Max	
$t_{PLH}$ $t_{PHL}$	Propagation delay	Waveform 1		26 26		9.0 9.0	ns ns

**NOTES:**

1. For conditions shown as Min or Max, use the appropriate value specified under recommended operating conditions for the applicable type and function table operating mode.
2. All typical values are at  $V_{CC} = 5\text{V}$ ,  $T_A = 25^\circ\text{C}$ .
3. Not more than one output should be shorted at a time and duration of the short circuit should not exceed one second.
4. These parameters are guaranteed, but not tested.

## AC WAVEFORM

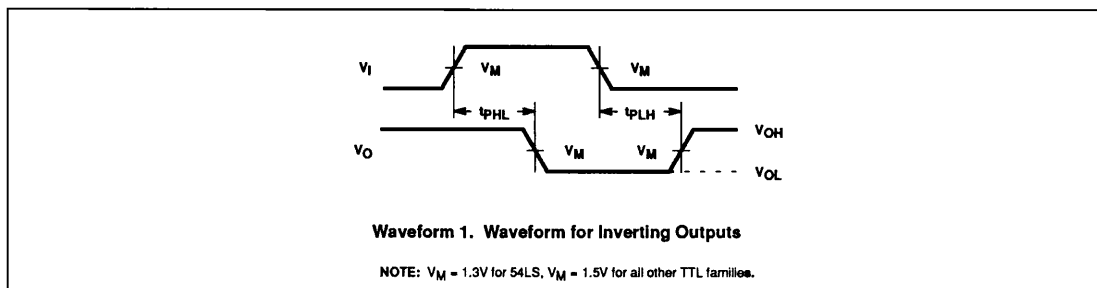

## TEST CIRCUIT AND WAVEFORM

