

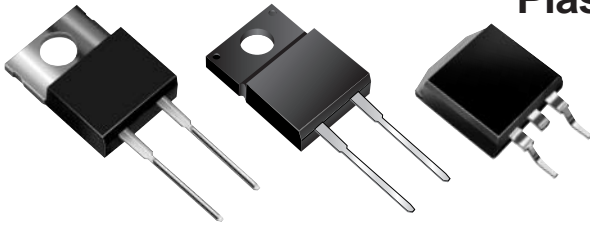


NSxT, NSFxT, NSBxT

Vishay Semiconductors
formerly General Semiconductor

Glass Passivated General Purpose Plastic Rectifier



Reverse Voltage 50 to 1000
Forward Current 8.0A




TO-220AC (NSxT)

ITO-220AC (NSFxT)

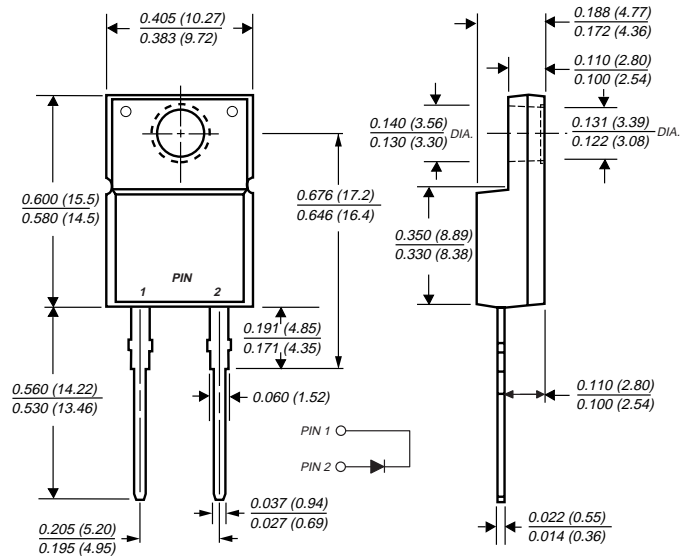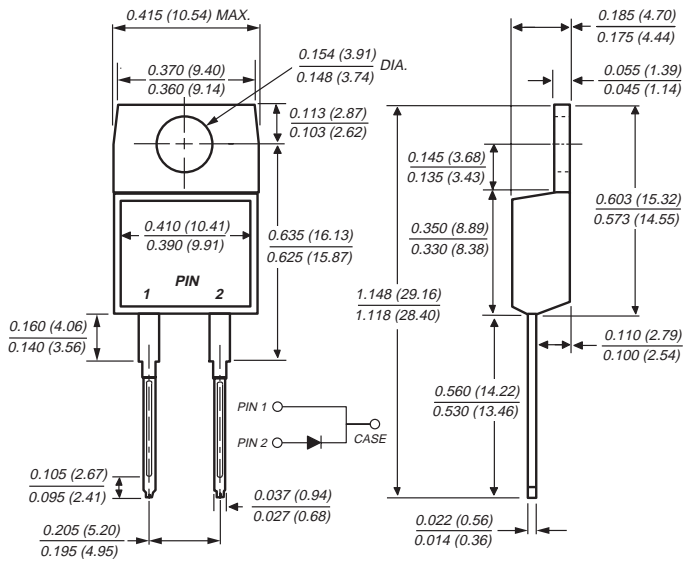
TO-263AB (NSBxT)



Mounting Pad Layout TO-263AB

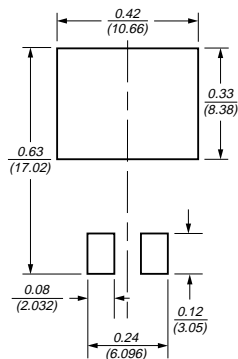

Dimensions in inches
and (millimeters)

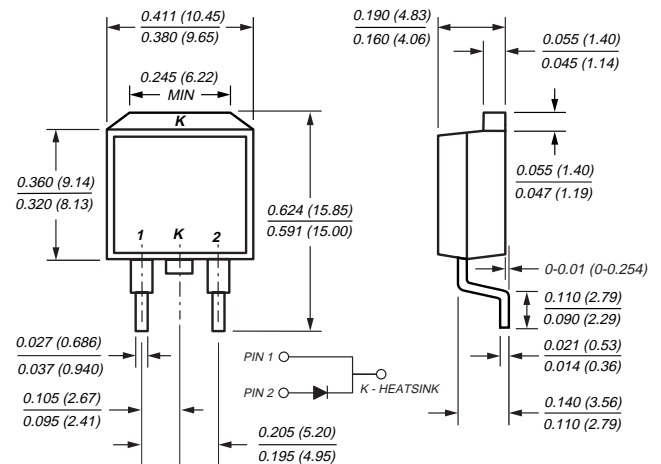

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High forward current capability
- High surge current capability
- Low forward voltage drop
- Glass passivated chip junction
- High temperature soldering guaranteed: 260°C/10 seconds, 0.160" (4.06mm) lead length

Mechanical Data

- Case:** JEDEC TO-220AC, ITO-220AC & TO-263AB molded plastic body
- Terminals:** Plated leads solderable per MIL-STD-750, Method 2026
- Polarity:** As marked
- Mounting Torque:** 10 in.-lbs. max.
- Mounting Position:** Any
- Weight:** 0.064 ounce, 1.81 grams

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	NS8 AT	NS8 BT	NS8 DT	NS8 GT	NS8 JT	NS8 KT	NS8 MT	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at $T_C=100^\circ\text{C}$	$I_{F(AV)}$	8.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	125							A
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150							°C
RMS Isolation voltage (NSF type only) from terminals to heatsink with $t = 1.0$ second, $RH \leq 30\%$	V_{ISOL}	4500 ⁽¹⁾ 3500 ⁽²⁾ 1500 ⁽³⁾							V

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	NS8 AT	NS8 BT	NS8 DT	NS8 GT	NS8 JT	NS8 KT	NS8 MT	Units
Maximum instantaneous forward voltage at 8.0A	V_F	1.1							V
Maximum DC reverse current at rated DC blocking voltage $T_C=25^\circ\text{C}$ $T_C=100^\circ\text{C}$	I_R	10 100							μA
Typical junction capacitance at 4.0V, 1MHz	C_J	55							pF

Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.






Parameter	Symbols	NSxT	NSFxt	NSBxt	Units
Typical thermal resistance ⁽⁴⁾	$R_{\theta JC}$	3.0	5.0	3.0	°C/W

Notes:

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
- (2) Clip mounting (on case), where leads do overlap heatsink
- (3) Screw mounting with 4-40 screw, where washer diameter is $\leq 4.9\text{mm}$ (0.19")
- (4) Thermal resistance from junction to case mounted on heat sink

Ratings and Characteristic Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

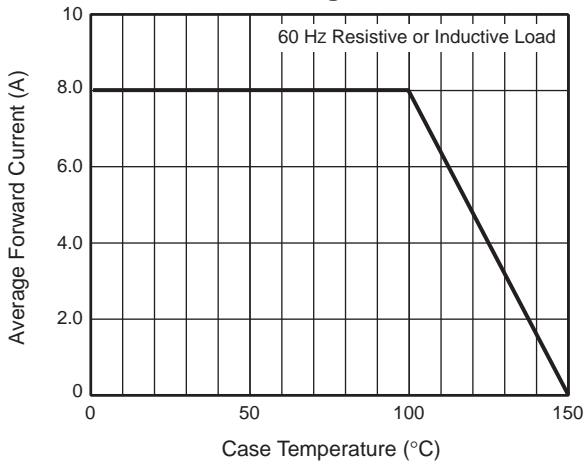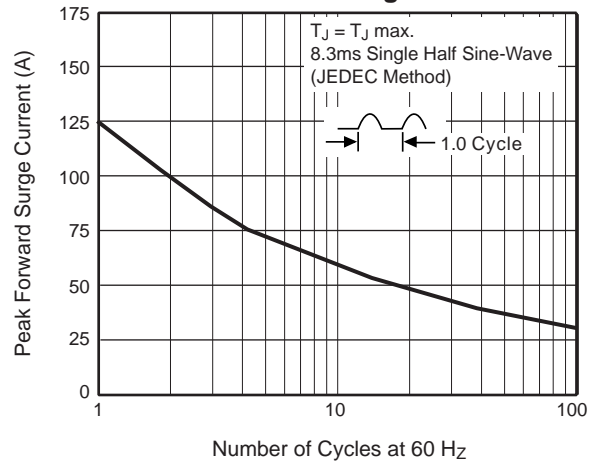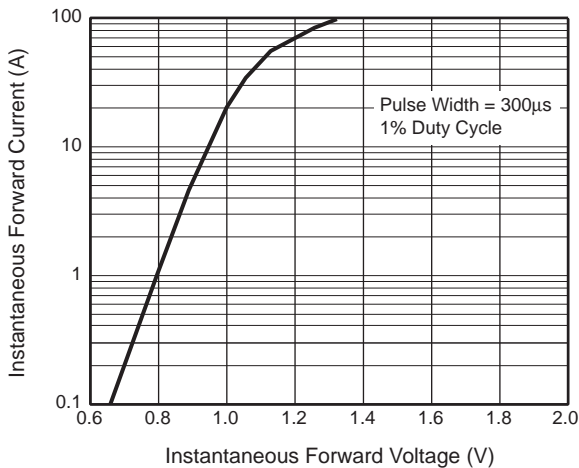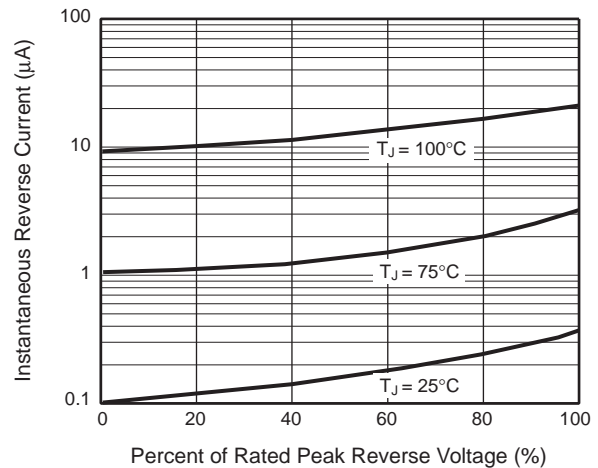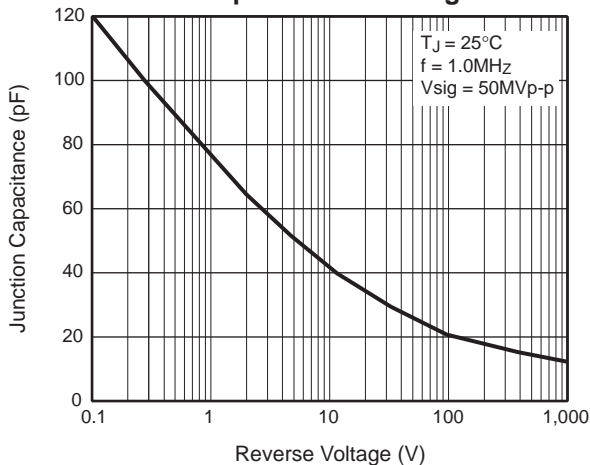Fig. 1 – Forward Current Derating Curve

Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

Fig. 3 – Typical Instantaneous Forward Characteristics

Fig. 4 – Typical Reverse Characteristics

Fig. 5 – Typical Junction Capacitance Per Leg




Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.