



FEMALE HEADER „PRECISION“
ID: 118 BL 30-XX

Series 431

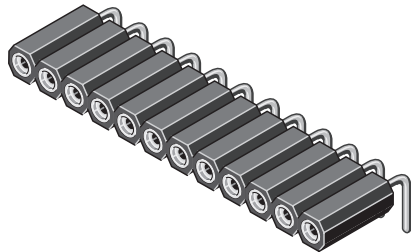

TECHNICAL DATA

Pitch	2,54 mm
Insulating Material	high temp. thermoplast UL94V-0
Contact Material	Brass/BeCu
Rated Current	3 Amp.
Rated Voltage	100 V _{RMS} /150 V _{DC}
Withstanding Voltage	min. 1000 V _{RMS}
Operating Temperature	-55°C to +125°C
Maximum Soldering Temperature	260°C for 10 seconds

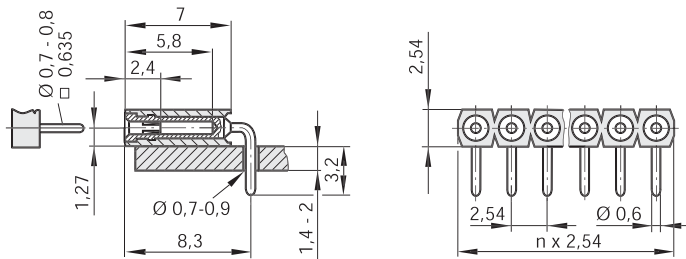

All dimensions in mm.
 Other dimensions upon request.

BL 30 - XX - X U

- BL 30: 1 row, right angled
- XX: No. of contacts
1 - 50 poles possible
- X: Blank = sleeve: Sn/clip Au
8 = sleeve: Sn/clip 0,75µm Au
- U: RoHS-compliant with high temp. plastic

7 | 2,54 mm