


413/D-SUB HD 1.2mm Type

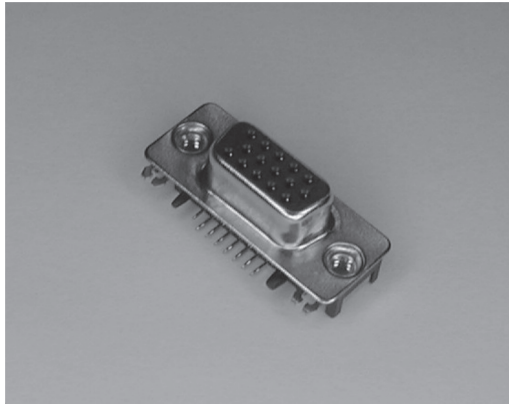

MATERIAL:


1. INSULATOR : PBT+ 30% GLASSFIBER UL 94V-0.
2. CONTACT : BRASS.
3. CONTACT PLATED : GOLD-FLASHOVER NICKEL.
4. DIP AREA PLATED: TIN.
5. SHELL : STEEL WITH NICKEL PLATED.

SPECIFICATION:

1. DIELECTRIC STRENGTH: 1000V FOR ONE MINUTE.
2. INSULATION RESISTANCE : 1000MEGOHMS MIN. AT 500V DC.
3. CONTACT RESISTANCE : 20MILLIOHMS MAX.
4. TEMPERATURE : -55°C TO +105°C.
5. RATED CURRENT : 5 AMPS.

NOTE :

1. PC99 PANTONE COLOR CODE : BLUE : 661C.

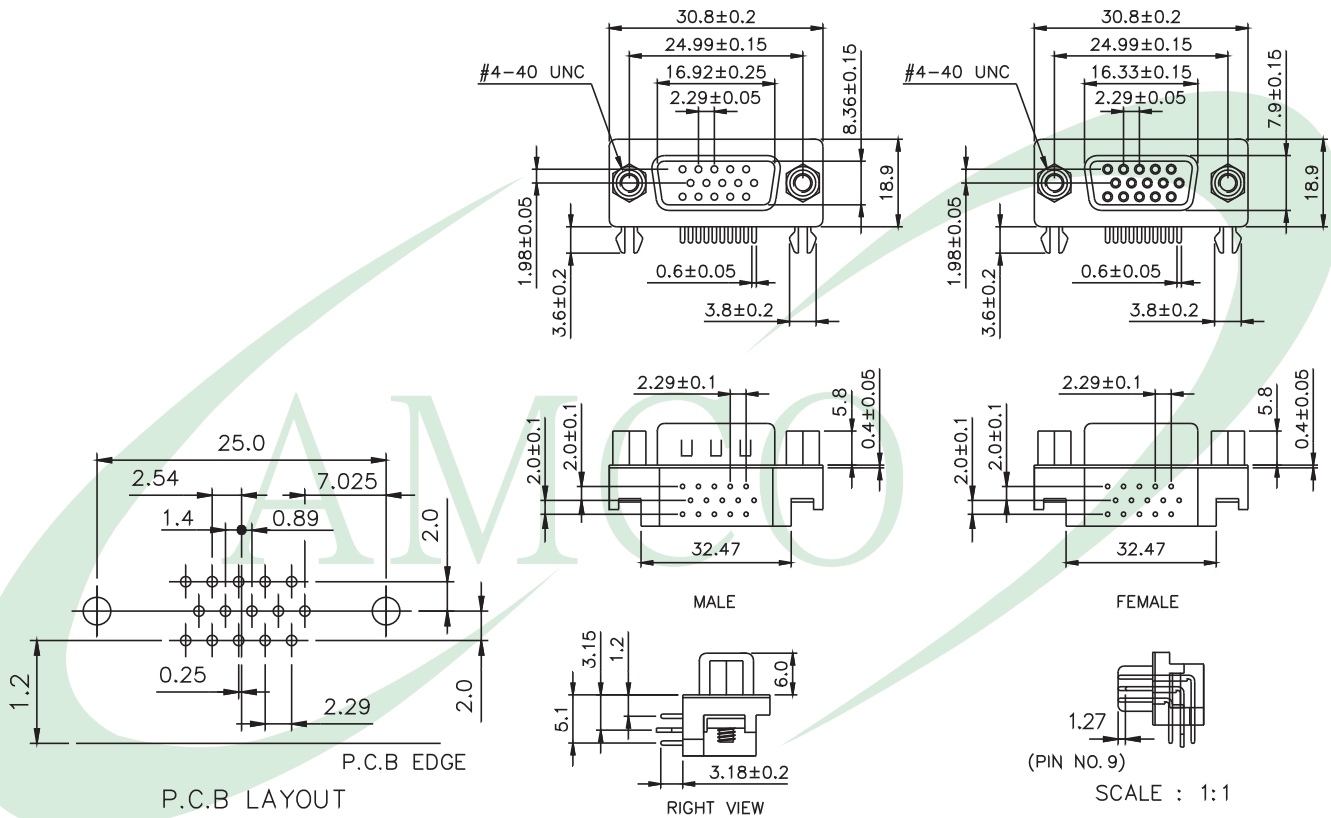

413. D-SUB

Series No.

1	2	3	4
4	1	3	

HIGH DENSITY R/A TYPE
1.2mm FOOT PRINT

No. of Contacts

5	6	15
1	5	

Contact Mounting

Type

7	8	9
F	C	N

F: FEMALE A: Rivet Type
B: With Jack Screw
C: Rivet With Jack Screw
D: Rivet Add Jack Screw

Shell

Plated

10	11
S	1

N: NICKEL

T: TIN

Z: ZINC

Contact Plated

10	11
S	1

T1: TIN
G1: Gold Flash S1: Gold Flash
G2: 3u" Gold S2: 3u" Gold
G3: 5u" Gold S3: 5u" Gold
G4: 10u" Gold S4: 10u" Gold
G5: 15u" Gold S5: 15u" Gold
G6: 30u" Gold S6: 30u" Gold
(G: Full Gold)(S: Selective Gold)

Plastic

Color

12	13
U	A

B: Black

U: Blue

N: No Mark

Branding

12	13
U	A

A: Amco Mark

N: No Mark