UNIT: INCH / MM

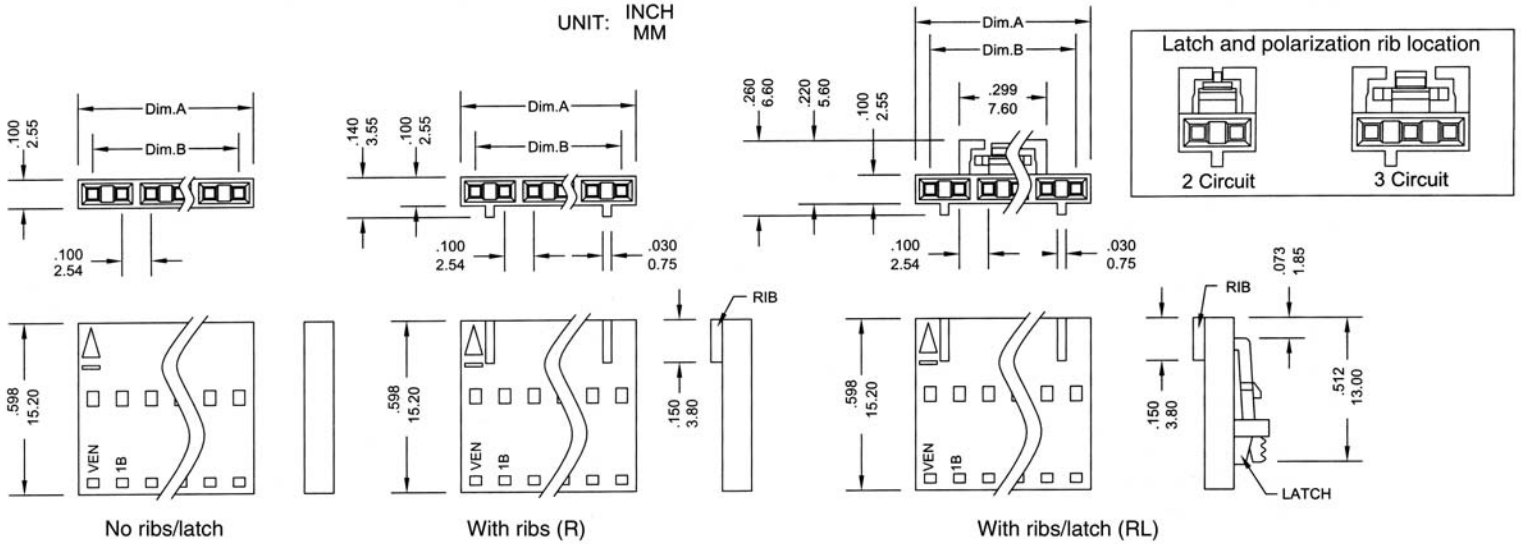

Dimensions								
Pos.	A	B	Pos.	A	B	Pos.	A	B
02	5.08	2.54	10	25.40	22.86	18	45.72	43.18
03	7.62	5.08	11	27.94	25.40	19	48.26	45.72
04	10.16	7.62	12	30.48	27.94	20	50.80	48.26
05	12.70	10.16	13	33.02	30.48	21	53.34	50.80
06	15.24	12.70	14	35.56	33.02	22	55.88	53.34
07	17.78	15.24	15	38.10	35.56	23	58.42	55.88
08	20.32	17.78	16	40.64	38.10	24	60.96	58.42
09	22.86	20.32	17	43.18	40.64	25	63.50	60.96

SPECIFICATIONS

Voltage rating:	250VAC max.
Current rating:	3 amps AC/DC
Housing material:	Nylon66+15% glass fiber, UL94V-0
Contact resistance:	10 milliohms max. initial
	20 milliohms after environ. testing
Insulation resist.:	1,000 megohms min.
Withstanding:	1,500 VAC for 1 min.
Temp. range:	-40°C to +105°C
Applicable wire:	AWG #30-22
Terminal retention:	6.6lbs min.

Series	Type	Contacts	Options
JS-V	2492	XX	XX
Pluggable connector	.100" pitch single row	02-25	[blank]=None L=With latch R=With ribs RL=With ribs and latch

RoHS compliant

Rev.	Description	Date	Approved

Drawing	Name	Date
Approved	Howard	07/13/07
Checked	Lizzy	07/13/07
Drawn	Tina	07/13/07

0.0 ± 0.35 0.00 ± 0.20 Angles ± 3°

UNIT: mm

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-V-2492-XX-L**

Description: .100" center crimp terminal housing