









Female Header 1.27mm 1 Row H=5.7mm SMT Type

Specifications

Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

Material





Insulator:Polyester,UL 94V-0
 ©Standard:Nylon 6T
 Terminal:Copper Alloy
 Plating:Gold Plated

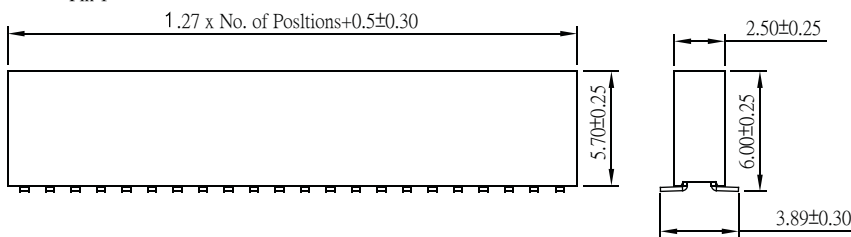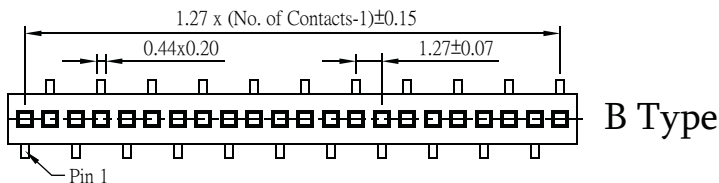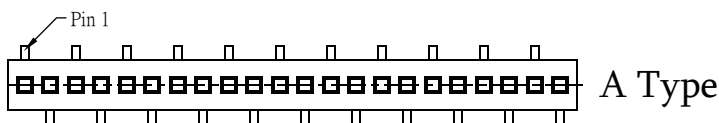

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)


Part No.:PS4M58-1XX-U

Female Header 1.27x2.54mm 2 Row H=5.7mm SMT Type

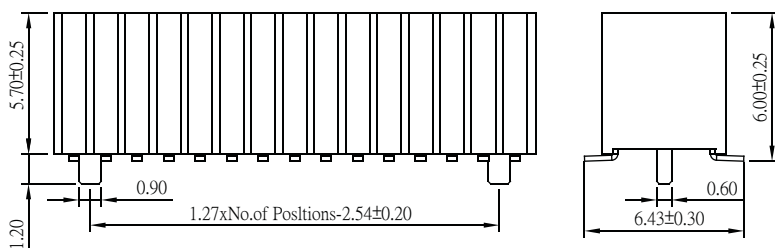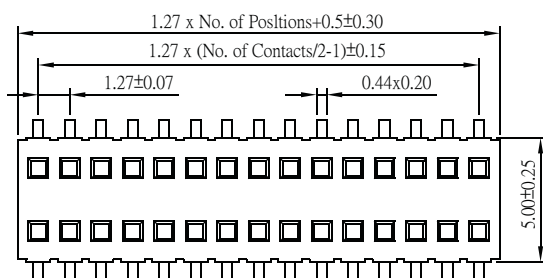

Part No.:PS4M58-2XX-U

ORDER INFORMATION

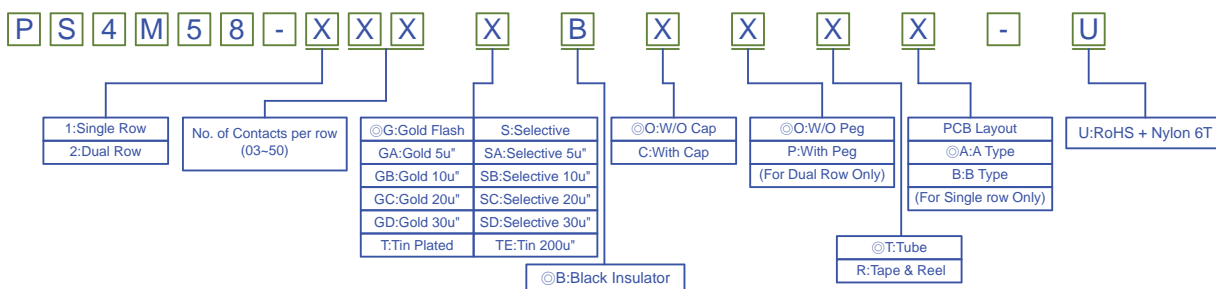

©Standard Recommended

