




MTMM-125-15-T-S-500

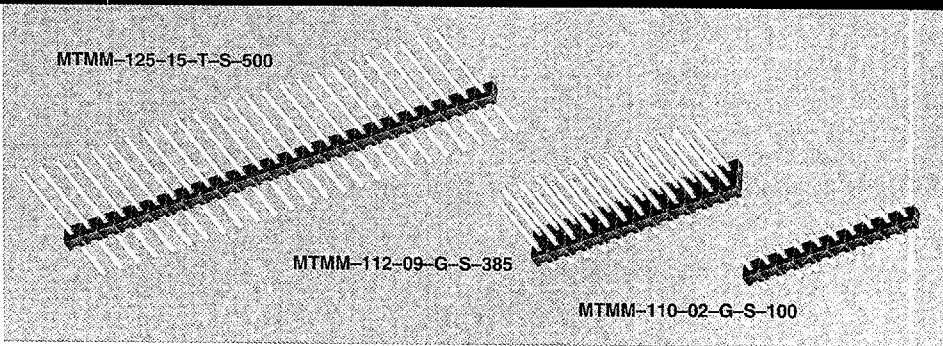

MTMM-112-09-G-S-385


MTMM-110-02-G-S-100

## 2mm LOW PROFILE STRIPS MTMM SERIES

Mates with:  
CLT, SQT, ESO, TLE  
SYM, MMS, TCSD

### Specifications: MTMM HI-TEMP


**Insulator Material:**  
Black Liquid Crystal Polymer  
**Terminal Material:**  
Phosphor Bronze  
**Current Rating:**  
3A @ 80°C ambient  
**Operating Temp Range:**  
-65°C to +105°C with Tin;  
-65°C to +125°C with Gold  
**Max Processing Temp:**  
230°C for 60 seconds  
**Plating:**  
Sn or Au over 50µ" (1.27µm) Ni




**Note:**  
This Series is non-standard,  
non-returnable.

<b>MTMM</b>	<b>1</b>	<b>NO. PINS PER ROW</b>	<b>LEAD STYLE</b>	<b>PLATING OPTION</b>	<b>ROW OPTION</b>	<b>POST HEIGHT</b>	<b>OPTION</b>
<b>01 thru 50</b> 			<b>-G</b> = 20µ" (0,51µm) Gold post Gold flash on tail	<b>-S</b> = 30µ" (0,76µm) Gold post 150µ" (3,81µm) Tin on tail (Styles -02 thru -08 not available)	<b>-S</b> = Single Row  <b>-D</b> = Double Row  <b>-Q</b> = Quad Row	<b>-XXX</b> = Post Height in inches, .005" (0,13mm) increments 	<b>"XX"</b> = Polarized Position


### Specify LEAD STYLE from chart.



LEAD STYLE	OAL
-02	.255 (6.48)
-03	.302 (7.67)
-04	.323 (8.20)
-05	.377 (9.58)
-06	.397 (10.08)
-07	.458 (11.58)
-08	.476 (12.09)
-09	.535 (13.59)
-10	.555 (14.10)
-11	.594 (15.09)
-12	.614 (15.60)
-13	.673 (17.09)
-14	.751 (19.08)
-15	.830 (21.08)

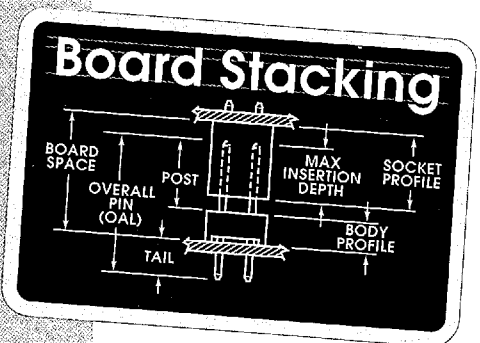

### APPLICATIONS

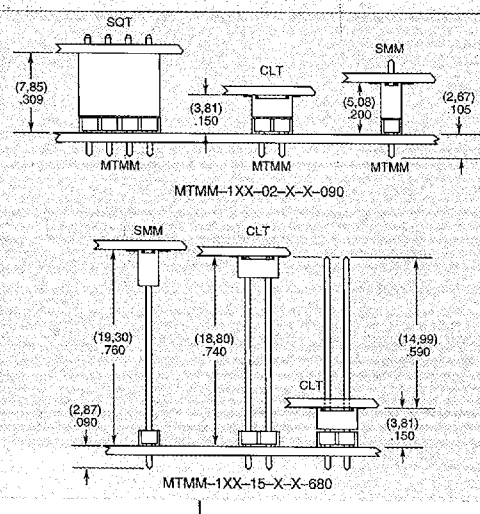

12F 7964149 0002088 8T2

Note: Due to technical progress, all designs, specifications and components are subject to change without notice.