

SB320 THRU SB3100 3.0AMP. Schottky Barrier Rectifier

VOLTAGE:20 TO 100V

CURRENT:3.0A



Specification Features:

- Case: Epoxy, Molded
- Weight:1.2Gram (Approximately)
- High current capability,Low Forward Voltage Drop
- High surge current capability
- Finish: All External Surfaces Corrosion Resistant And Terminal Leads Are Readily Solderable
- Lead And Mounting Surface Temperature For Soldering Purposed:
260°C Max. For 10 Seconds 1/16 Inch From Case
- RoHS Compliant
- Cathode Indicated By Polarity Band

DEVICE MARKING DIAGRAM



SB3XX : Device Name SB320- SB3100
KEL : KEL Logo

Absolute Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted

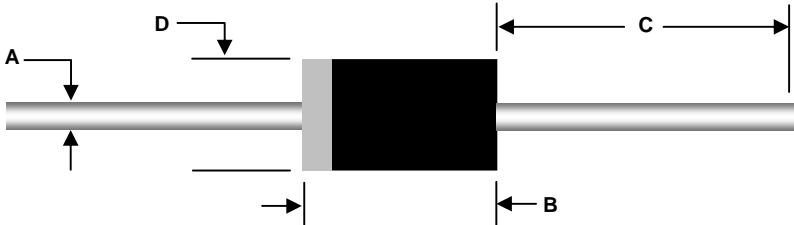
Parameter	Symbol	SB 320	SB 330	SB 340	SB 350	SB 360	SB 380	SB 3100	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	V
Maximum DC Blocking Voltage	V_R	20	30	40	50	60	80	100	V
Maximum Average Forward Rectifier Current. (0.375" Lead Length @ $T_A=75^\circ\text{C}$)	$I_{F(AV)}$	3.0							A
Non-repetitive Peak Forward Surge Current. (8.3mS Single Half Sine-wave)	I_{FSM}	80							A
Operating Junction Temperature	T_J	100					150		$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +100					-55 to +150		$^\circ\text{C}$
Thermal Resistance (Note 1) (Junction to Ambient)	$R_{\theta JA}$	30							$^\circ\text{C/W}$

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	SB 320	SB 330	SB 340	SB 350	SB 360	SB 380	SB 3100	Units	
Maximum D.C Reverse Current At Rated D.C Blocking Voltage @ $T_A=25^\circ\text{C}$ @ $T_A=100^\circ\text{C}$	I_R	1.0				30.0				mA
Forward Voltage @3A	V_F	0.550			0.750		0.850		V	
Total Capacitance @VR=4V, f=1MHz	C_T	180							pF	

NOTE: (1) Thermal resistance from junction to ambient at 0.375" lead length, vertical P.C. board mounted

Package Outline

Package	Case Outline			
				
DO-201AD	DO-201AD			
DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	1.18	1.30	0.046	0.052
B	7.20	9.60	0.285	0.375
C	25.40	---	1.000	---
D	4.80	5.30	0.190	0.210



NOTICE

The information presented in this document is for reference only. Tak Cheong reserves the right to make changes without notice for the specification of the products displayed herein.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Tak Cheong Semiconductor Co., Ltd., or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.takcheong.com>, or consult your nearest Tak Cheong's sales office for further assistance.