

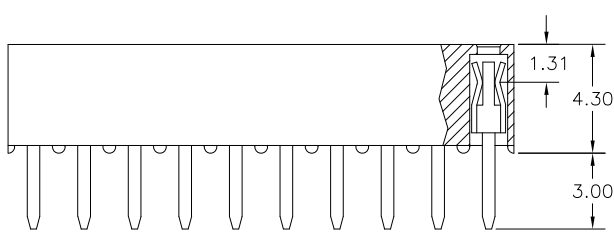

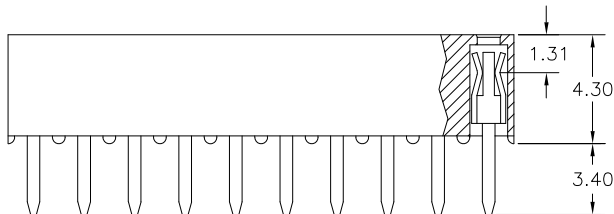
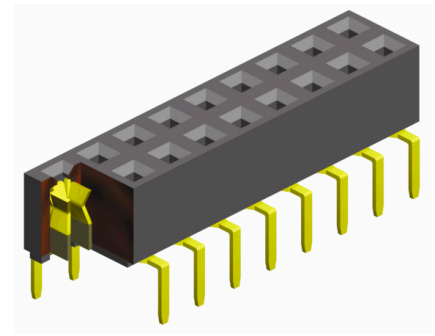




2.00mm pitch Female Header
 - THT - Dual Entry Type

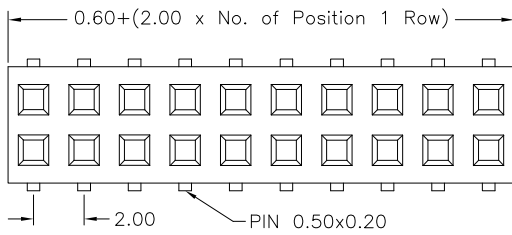

SPECIFICATIONS

Current rating	1 A
Insulator resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC
Operating temperature	-40°C to +105°C
Contact material (RoHS compliant)	Phosphor Bronze
Insulator material (RoHS compliant)	Nylon UL 94 V-0

PCB Hole Layout

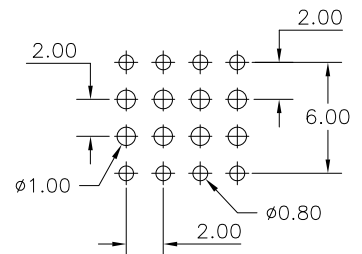

APPLICATION AND FEATURES

Dual entry low profile 4.30mm height
 Designed for parallel and vertical board stacking
 Dual-beam folded contact and low insertion force, mating with 0.50 x 0.50mm Pin Header

How to order

BB2 - x xx - S430 - 55 /2

