



SUPER FAST DIODE MODULE TYPES 200A

Features

- High Surge Capability
- Types Up to 600V V_{RRM}
- Isolation Type Package
- Electrically Isolation base plate


200 Amp Rectifier
50~600 Volts

THREE TOWER

Maximum Ratings


Operating Temperature: -55 °C to +175 °C
 Storage Temperature: -55 °C to +175 °C

Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MURT20005(R)	50V	35V	50V
MURT20010(R)	100V	71V	100V
MURT20020(R)	200V	141V	200V
MURT20040(R)	400V	283V	400V
MURT20060(R)	600V	424V	600V

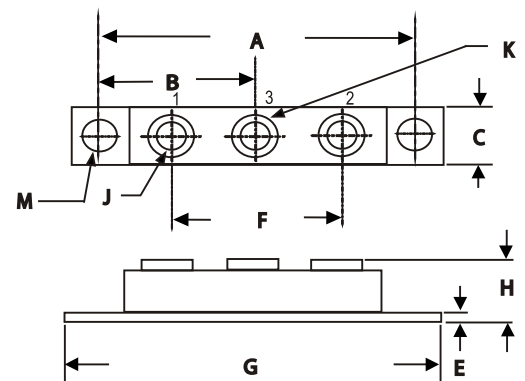

Electrical Characteristics @ 25 °C Unless Otherwise Specified

Average Forward Current (Per pkg)	$I_{F(AV)}$	200 A	$T_C = 140^\circ C$
Peak Forward Surge Current (Per leg)	I_{FSM}	2000A	8.3ms , half sine
Maximum Instantaneous Forward Voltage * 20005~20020 20040 20060 (Per leg)	V_F	1.0 V 1.3 V 1.7 V	$I_{FM} = 100A;$ $T_J = 25^\circ C$
Maximum Instantaneous Reverse Current At Rated DC Blocking Voltage (Per leg)	I_R	25 μA 1 mA	$T_J = 25^\circ C$ $T_J = 125^\circ C$
Maximum Reverse Recovery Time 20005~20020 20040 20060 (Per leg)	T_{rr}	75 ns 90 ns 110 ns	$I_F = 0.5A, I_R = 1.0A,$ $I_{RR} = 0.25A$
Maximum Thermal Resistance Junction To Case (Per leg)	$R_{\theta jc}$	0.45°C/W	

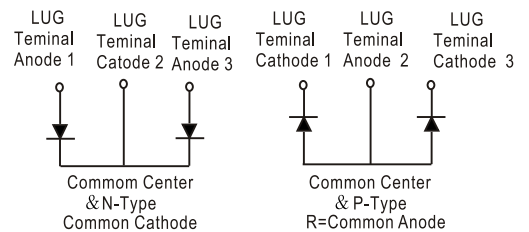

DIM	Inches		Millimeters	
	Min	Max	Min	Max
A	3.150	NOM	80.01	NOM
B	1.565	1.585	39.75	40.26
C	.700	.800	17.78	20.32
E	.119	.132	3.02	3.35
F	1.327	REF	33.72	REF
G	3.550	3.65	90.17	92.71
H	---	.73	---	18.30
J	1/4-20 UNC FULL			
K	.472	.511	12.00	13.00
M	.275	.295	6.99	7.49
N	2.380	2.46	60.50	62.50

*Pulse Test: Pulse Width 300 μ sec, Duty Cycle 2%



Figure .1- Typical Forward Characteristics

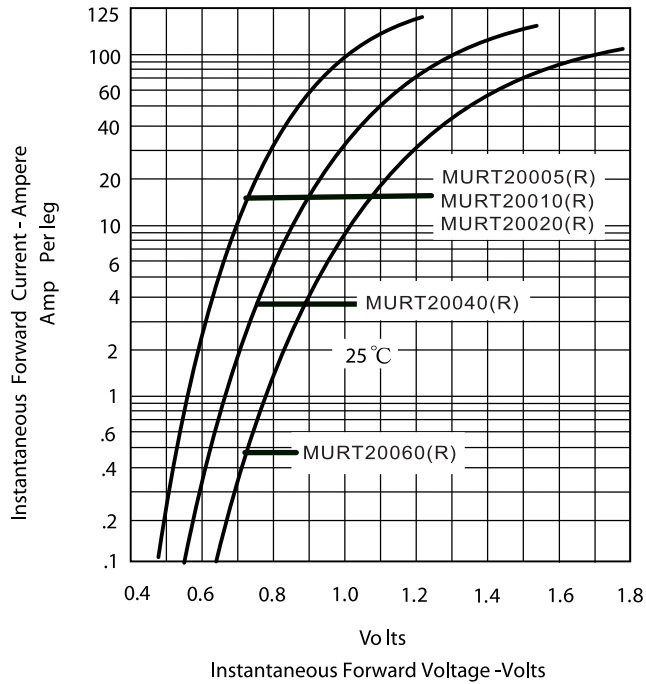


Figure .2- Forward Derating Curve

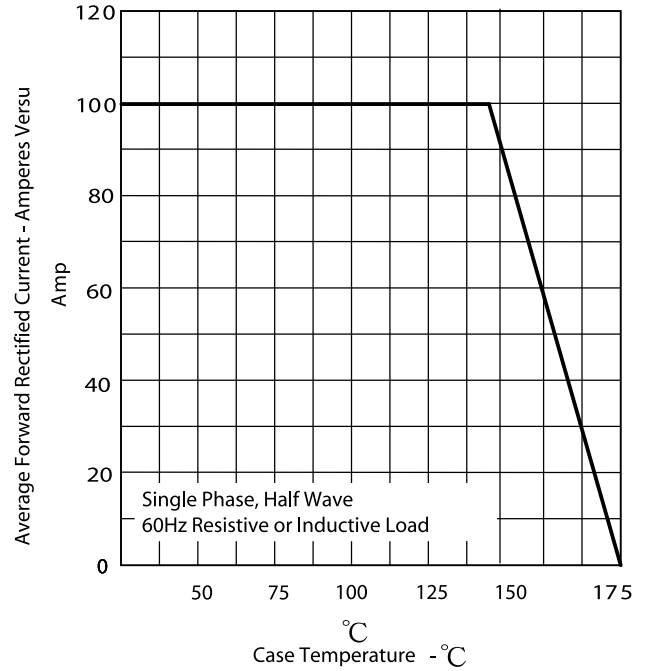


Figure.3- Peak Forward Surge Current

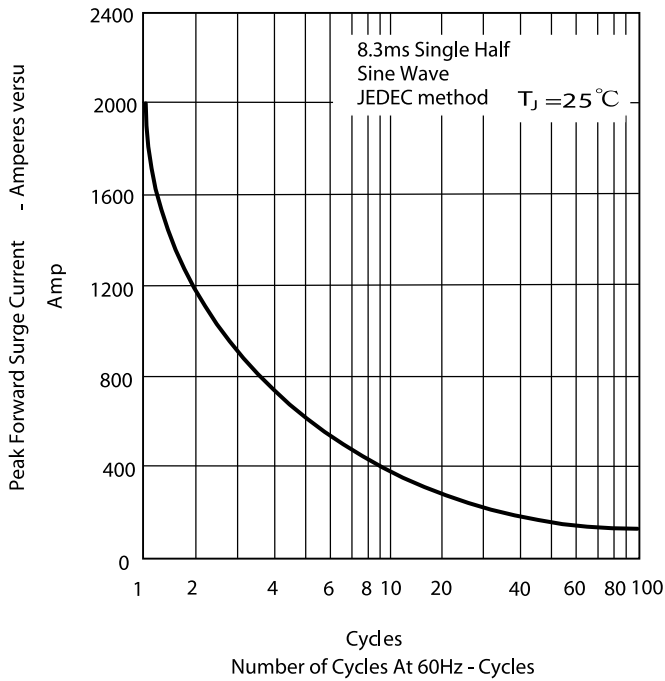


Figure .4-Typical Reverse Characteristics

