

F female Header 2.54mm



RoHS












Female Header 2.54mm 1/2/3 Row H=8.5mm Straight Type

Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material


Insulator: Polyester, UL 94V-0
 ©Standard: PBT or Nylon 6T
 Terminal: Copper Alloy
 Plating: Gold Plated

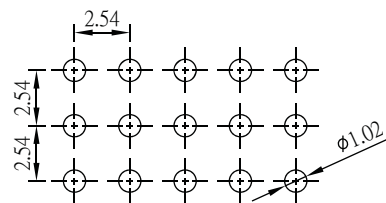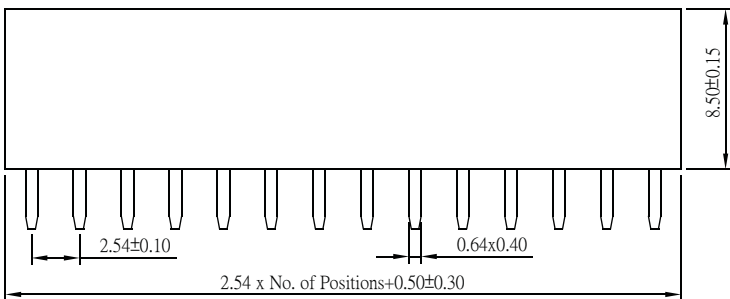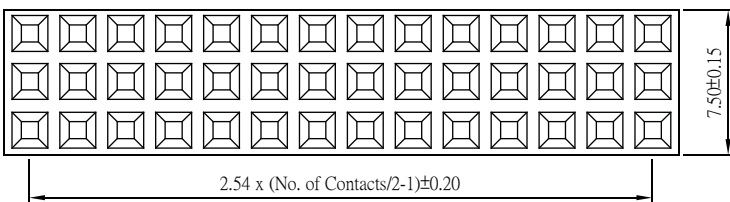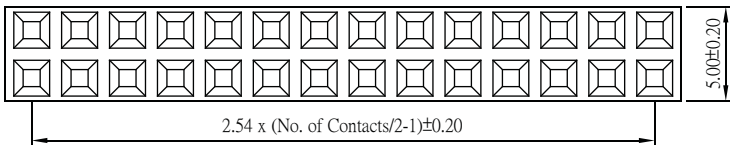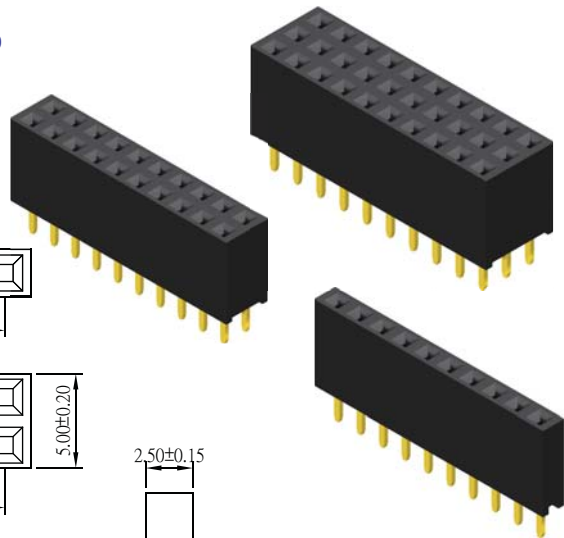

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Part No.: PS1S85-1/2/3XX-L/U

ORDER INFORMATION

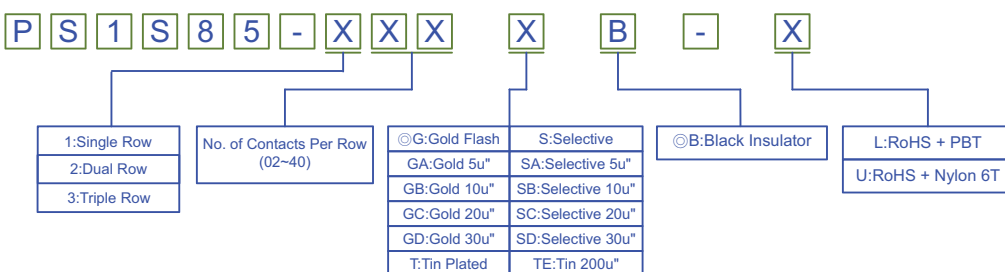

©: Standard Recommended