

2.54mm (0.1") Pin Header

4.3mm Base

(Dual Row, Straight & Right Angle)






2205 Series

APPLICATION AND FEATURES



1. Variable pin length, gold or tin plated.
2. Standoffs facilitate post soldering clean.
3. Dual row 08 to 80 contacts.

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms Min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°C to +105°C
 Contact Material: Brass or Phosphor bronze
 Insulator Material: Polyester, UL 94V-0

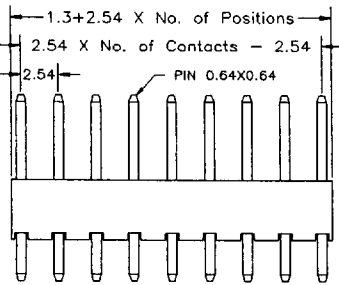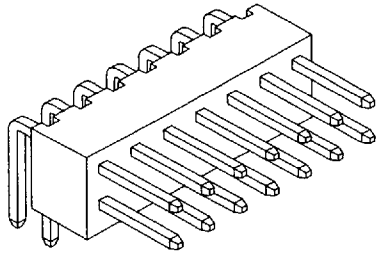


Recommended P.C. Board Hole Layout



Order Information 2205 Series

Example: 2205-34-S-02-A/B

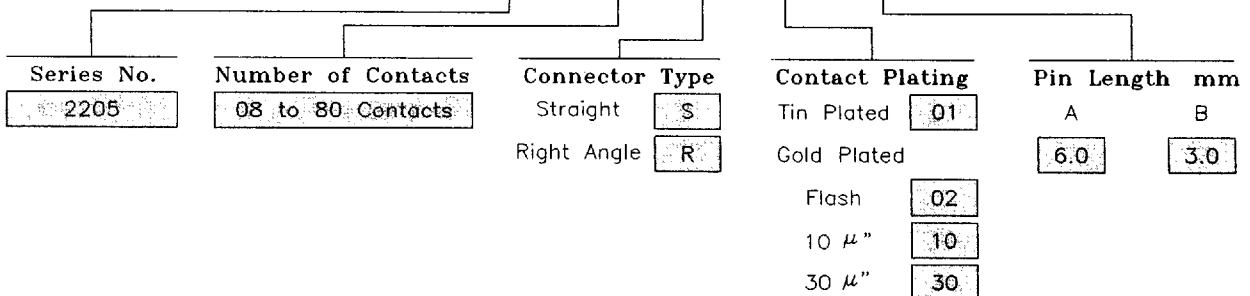

SINGATRON ENT. CO., LTD. Tel.: (909) 464-1883 Fax.: (909) 464-1884

9011184 000065 947