
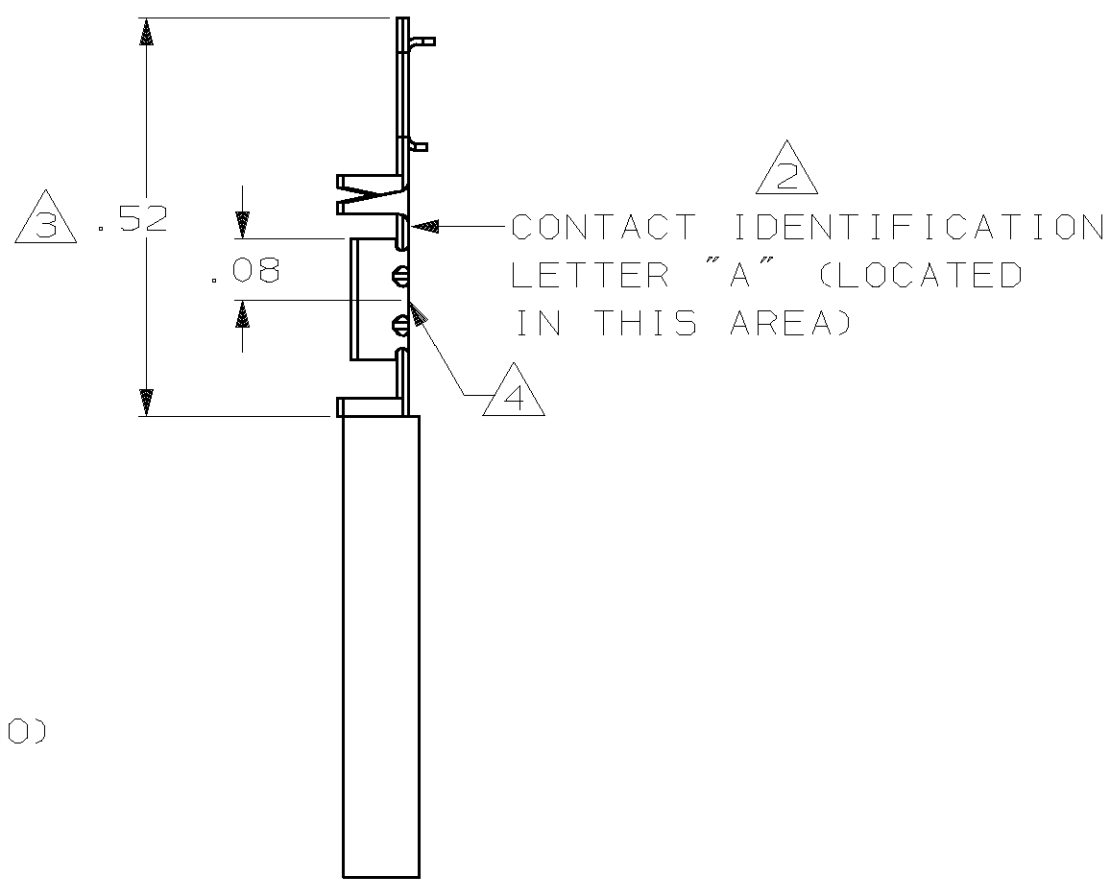



THIS DRA RELEASED FOR PUBLICATION , 19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPROVED
AD	39				B	ECN 1166 REVISED & REDRAWN	-	-
					C	REV PER AR2268	BM 4-89	
					D	REV LOC & DIST AD-4171	3-90	BF
					E	REV PER AD-6052	1-27-92	MR
					F	REV PER 0010-0832-93	7-13-93	JG
					G	REV PER 0010-0782-93	2-16-94	JG
					H	REV PER 0010-1884-93	2-16-94	JG
					J	REV PER 0010-0708-94	5-31-94	JG
					K	REV PER 0010-0810-94	5-31-94	JG
					L	REV PER 0010-0785-96	1-22-97	JG
					M	REV PER 0310-0412-97	02-FEB-98	JG
					N	REV PER 0G3C-0290-00	19JUL00	KW
					P	REV PER 0G3C-0018-00	19JUL00	KW

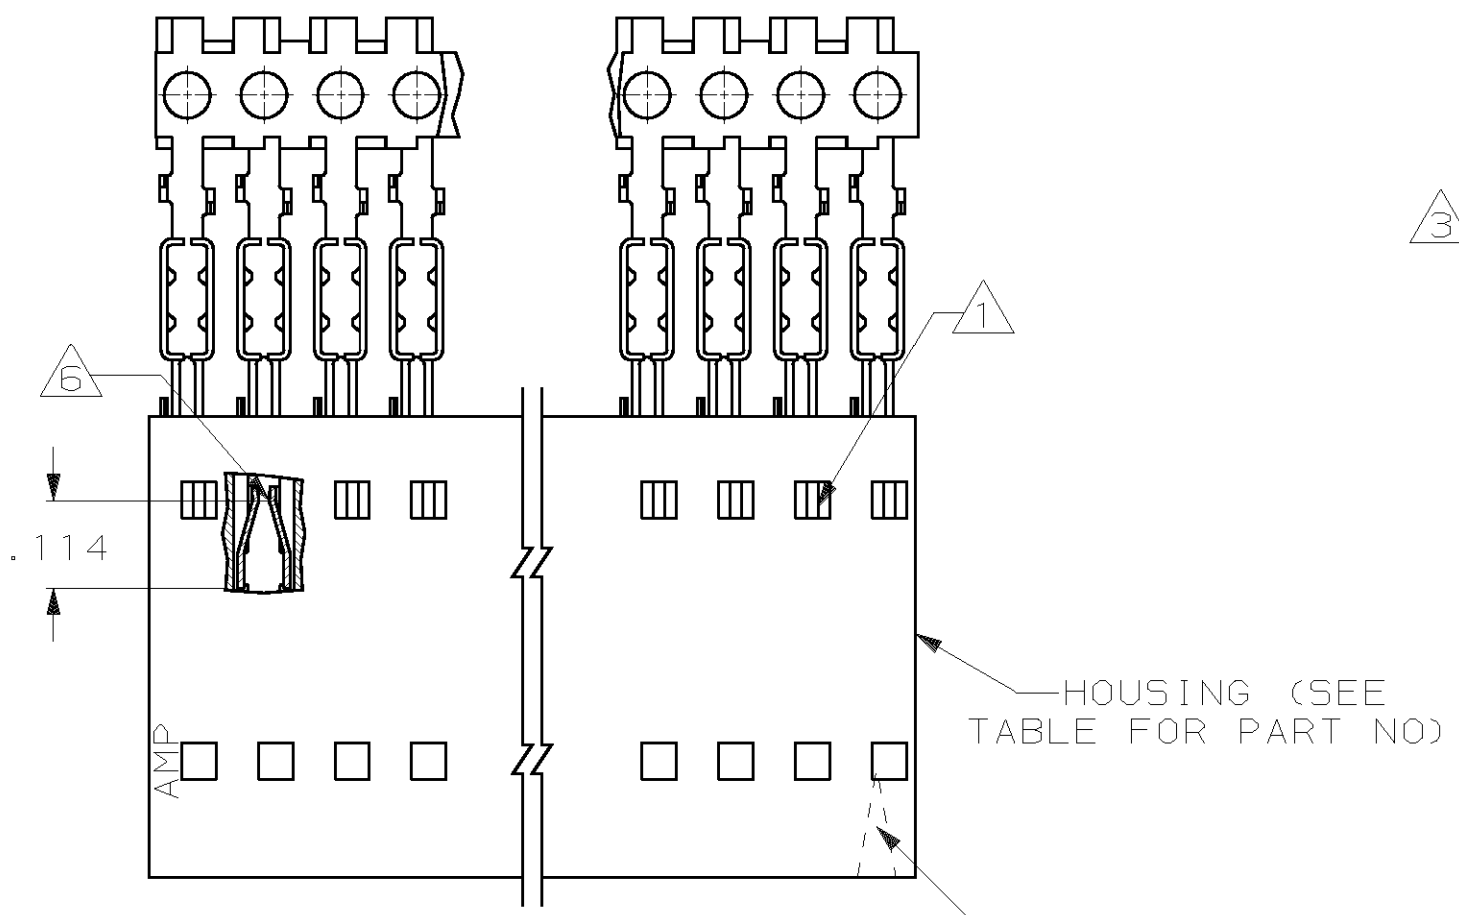

HOUSING (SEE TABLE FOR PART NO)

POSITION #1 INDICATOR (FAR SIDE)



HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER
2-103688-4	25	2-103685-4
2-103688-3	24	2-103685-3
2-103688-2	23	2-103685-2
2-103688-1	22	2-103685-1
2-103688-0	21	2-103685-0
1-103688-9	20	1-103685-9
1-103688-8	19	1-103685-8
1-103688-7	18	1-103685-7
1-103688-6	17	1-103685-6
1-103688-5	16	1-103685-5
1-103688-4	15	1-103685-4
1-103688-3	14	1-103685-3
1-103688-2	13	1-103685-2
1-103688-1	12	1-103685-1
1-103688-0	11	1-103685-0
103688-9	10	103685-9
103688-8	9	103685-8
103688-7	8	103685-7
103688-6	7	103685-6
103688-5	6	103685-5
103688-4	5	103685-4
103688-3	4	103685-3
103688-2	3	103685-2
103688-1	2	103685-1

SUPERSEDED BY 1-103977-1  
 SUPERSEDED BY 1-103977-0  
 SUPERSEDED BY 103977-9  
 SUPERSEDED BY 103977-8  
 SUPERSEDED BY 103977-7  
 SUPERSEDED BY 103977-6  
 SUPERSEDED BY 103977-5  
 SUPERSEDED BY 103977-4  
 SUPERSEDED BY 103977-3  
 SUPERSEDED BY 103977-2  
 SUPERSEDED BY 103977-1

- ① CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- ② USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- ③ THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- ④ POINT OF MEASUREMENT FOR PLATING THICKNESS
- ⑤ FOR STRIP ASSEMBLIES SEE PART NUMBER 103977
- ⑥ POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON :	DR 11-5-86 L. MAYER
2 PL DEC ± .02	CHK 11/12/86 P. DEJONG
3 PL DEC ± .005	APPD 11/12/86 P. DEJONG
ANGLES ± -	APPD 11/13/86 J. SCHIEFER
MATERIAL: HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK	PRODUCT SPEC 108-25034
CONTACTS- PHOS BRONZE	APPLICATION SPEC 114-25026
FINISH: CONTACTS: .000100-.000200 TIN-LEAD OVER .000050 NICKEL	WEIGHT -

<b>AMP</b> AMP INCORPORATED Harrisburg, Pa. 17105	
NAME RCPT ASSY, AMPMODU® MTE, SINGLE ROW, .100¢, FOR #26-#30 AWG WIRE SIZE	
SIZE C 00779	DRAWING NO 103685
SCALE 4:1	SHEET 1 OF 1