

SPECIFICATIONS

Mechanical

Card Mating Force: 28.8N max  
 Card Retention Force: 4.9N MIN AND 25.4N MAX  
 Durability: 10000 Cycles.

Electrical


Contact Current Rating: 0.5A  
 Contact Resistance: : 40mW max. initial  
 60 mW After Endurance Test  
 Dielectric Withstanding Voltage: 500Vrms AC  
 Insulation Resistance: 1000MW max. initial

Physical


Housing: Thermoplastic, UL 94V-0 rated in White Color  
 Contact: Copper Alloy  
 Plating: G/F  
 Operating Temperature: -40 to +85

CF Card Connector

CF Series  
 Right Angle, SMT  
 Normal Type  
 1.27mm [.05"] Pitch  
 50 Pos. (C/F)

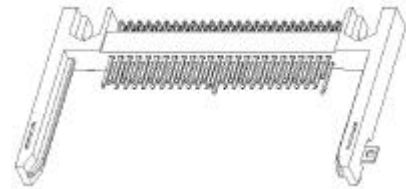

DRAWING

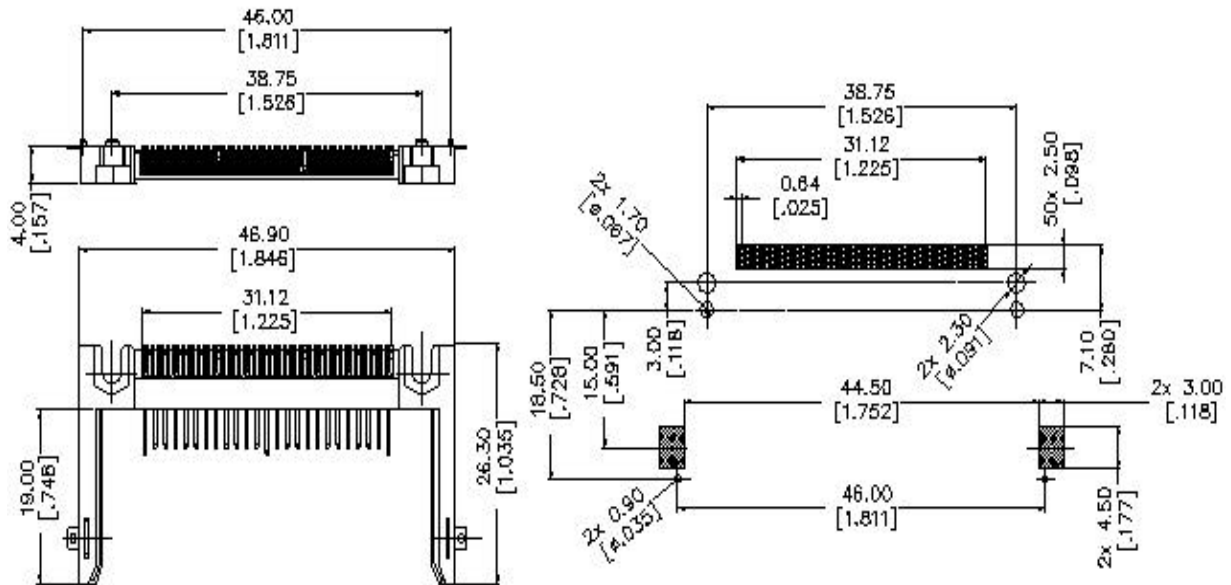

ORDERING INFORMATION

