

# Straight through hole type male connector for PCB


## LPC-( ) (T ) MB2( )

**2 mm pitch connector**

**For PCB**

**Straight Through hole**

RoHS

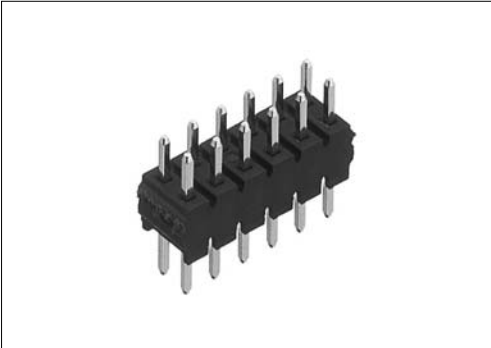


● Configuration of product Part No.

### LPC- ( ) (T ) MB2 ( )

①      ②      ③      ④

- ① Series name
- ② No. of contacts: 2–50
- ③ Length No. of contact:  
Refer to the table of dimensions below.
- ④ Contact plating  
+S: Tin plate  
G : Gold plate

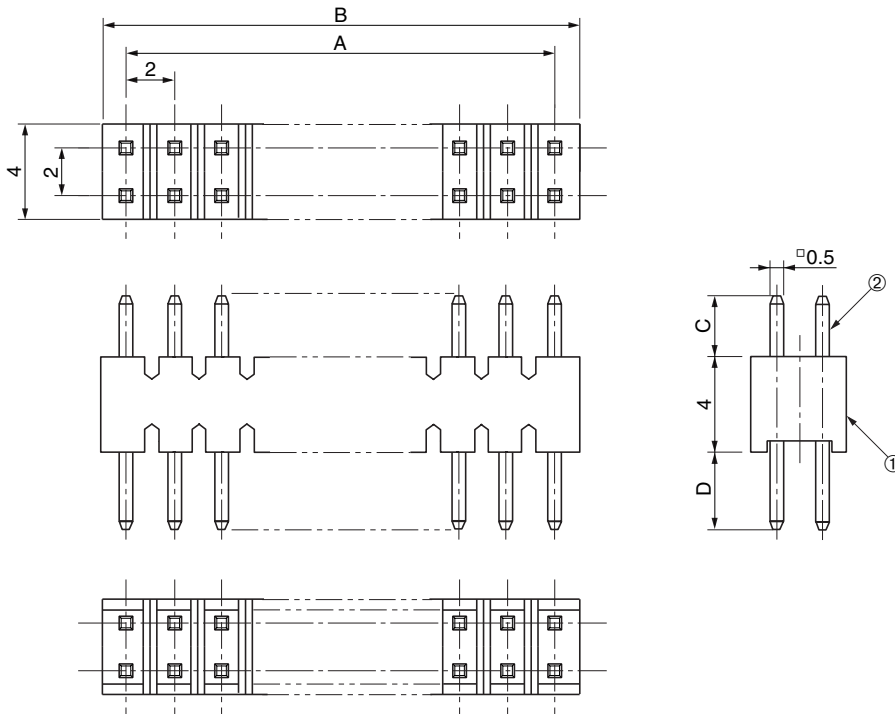

● Dimensions

Part No.	A	B
LPC-2(T)MB2( )	-	2
LPC-4(T)MB2( )	2	4
LPC-6(T)MB2( )	4	6
LPC-8(T)MB2( )	6	8
LPC-10(T)MB2( )	8	10
LPC-12(T)MB2( )	10	12
LPC-14(T)MB2( )	12	14
LPC-16(T)MB2( )	14	16
LPC-18(T)MB2( )	16	18
LPC-20(T)MB2( )	18	20
LPC-22(T)MB2( )	20	22
LPC-24(T)MB2( )	22	24
LPC-26(T)MB2( )	24	26
LPC-28(T)MB2( )	26	28
LPC-30(T)MB2( )	28	30
LPC-32(T)MB2( )	30	32
LPC-34(T)MB2( )	32	34
LPC-36(T)MB2( )	34	36
LPC-38(T)MB2( )	36	38
LPC-40(T)MB2( )	38	40
LPC-42(T)MB2( )	40	42
LPC-44(T)MB2( )	42	44
LPC-46(T)MB2( )	44	46
LPC-48(T)MB2( )	46	48
LPC-50(T)MB2( )	48	50

Part No.	C	D
LPC-( )MB2( )	3	3
LPC-( )TMB2( )	3.6	
LPC-( )TMB2( )	3.1	2

● Components

①	Insulator
②	Contacts

Because some combinations of "Configurations of Product Part No.", are under consideration for development, please contact us for availability details.

Mating connectors: LPC series female connectors or shunt plugs