
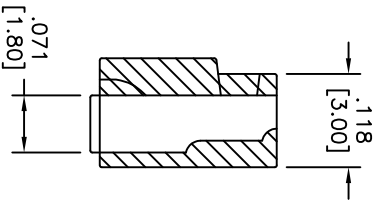
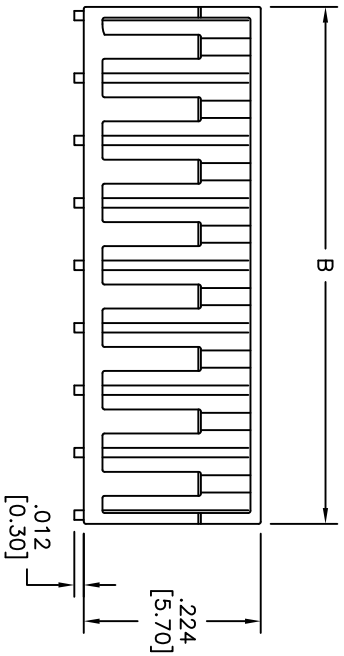


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	6321	RELEASED	3/22/06	
A		REVISED CURRENT	12/02/10	

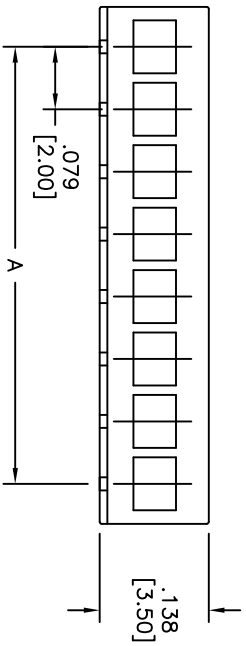

POLES	DIMENSION INCH/MM	
	A	B
2	.078[2.0]	.204[5.2]
3	.157[4.0]	.283[7.2]
4	.236[6.0]	.362[9.2]
5	.314[8.0]	.440[11.2]
6	.393[10.0]	.519[13.2]
7	.472[12.0]	.602[15.3]
8	.551[14.0]	.681[17.3]
9	.629[16.0]	.759[19.3]
10	.708[18.0]	.838[21.3]
11	.787[20.0]	.917[23.3]
12	.866[22.0]	.996[25.3]
13	.944[24.0]	1.07[27.3]
14	1.02[26.0]	1.15[29.3]
15	1.10[28.0]	1.23[31.3]
16	1.18[30.0]	1.31[33.3]

SPECIFICATIONS:

Material: Insulator: Nylon 66, rated UL 94V-0
 Insulator color: White
 Electrical: Operating voltage: 250V AC, DC
 Current rating: 2 Amp max
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 800V AC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] CRIMP HOUSING
 NON-POLARIZED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN LFI	3/22/06
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	2CH-Z-XX	A
REF:	SCALE: NTS	SHEET 1 OF 1