




1.25mm TERMINAL / HOUSING

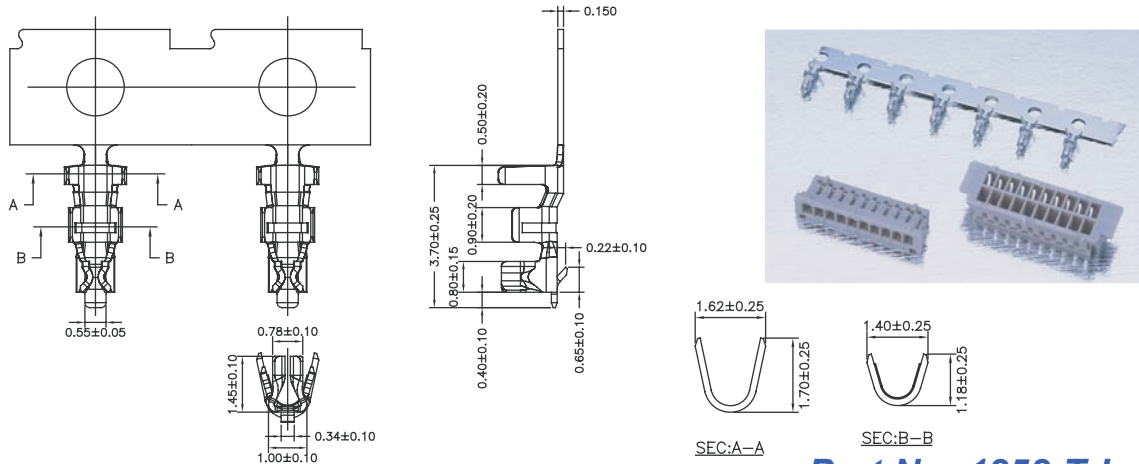


Part No.:1252-T-L

Wire Range	Insulation O.D.	Material	Finish	Qty/reel
AWG#26-#30	1.00mm(max)	Phosphor Bronze	Tin-plated	10,000pcs

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0
Pantone Color: 7529C~7530C

PART NO.	Dimensions	
	A	B
1252H-205W-L	5.00	10.40
1252H-207W-L	7.50	12.90
1252H-210W-L	11.25	16.65
1252H-215W-L	17.50	22.90
1252H-220W-L	23.75	29.15

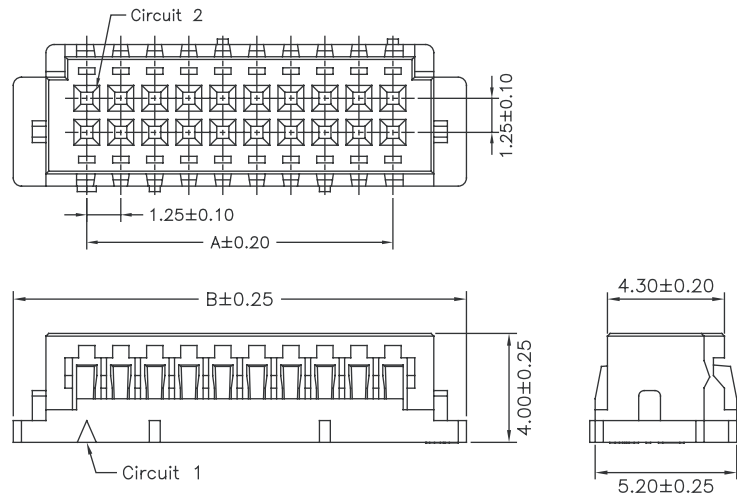


Part No.:1252H-2XXW-L

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20 mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0
Pantone Color: 7529C~7530C

PART NO.	Dimensions	
	A	B
1252H-02TW-L	1.25	4.15
1252H-03TW-L	2.50	5.40
1252H-04TW-L	3.75	6.65
1252H-05TW-L	5.00	7.90
1252H-06TW-L	6.25	9.15
1252H-07TW-L	7.50	10.40
1252H-08TW-L	8.75	11.65
1252H-09TW-L	10.00	12.90
1252H-10TW-L	11.25	14.15
1252H-11TW-L	12.50	15.40
1252H-12TW-L	13.75	16.65
1252H-13TW-L	15.00	17.90
1252H-14TW-L	16.25	19.15
1252H-15TW-L	17.50	20.40

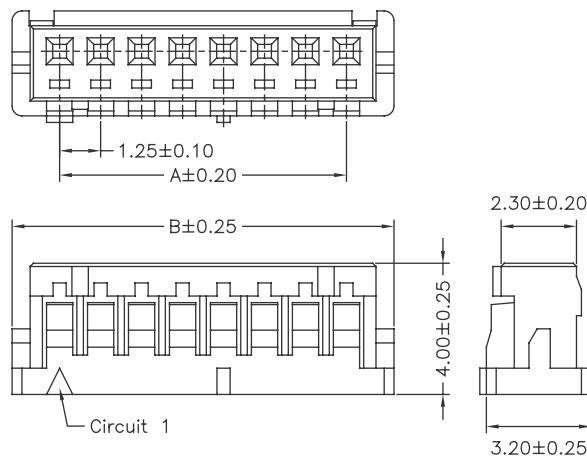

Part No.:1252H-1XXW-L