




(2,00 mm) .0787"

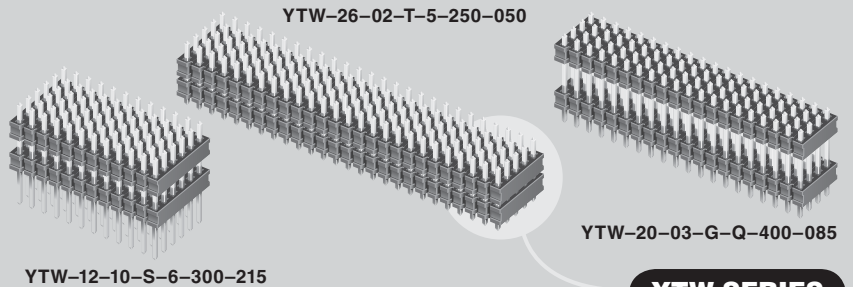

YTW SERIES

HIGH DENSITY BOARD STACKER

SPECIFICATIONS

For complete specifications see www.samtec.com?YTW

Insulator Material:
Black Liquid Crystal Polymer

Terminal Material:
Phosphor Bronze

Operating Temp Range:
-55°C to +105°C with Tin;
-55°C to +125°C with Gold

Plating:
Sn or Au over
50µ" (1,27 µm) Ni

RoHS Compliant: Yes
Lead-Free Solderable:
Wave only


RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality




Mates with:
YTQ, YTS, YTE

OTHER SOLUTIONS




Paste In Hole (PIH) processing.
Contact Samtec ASP Group.

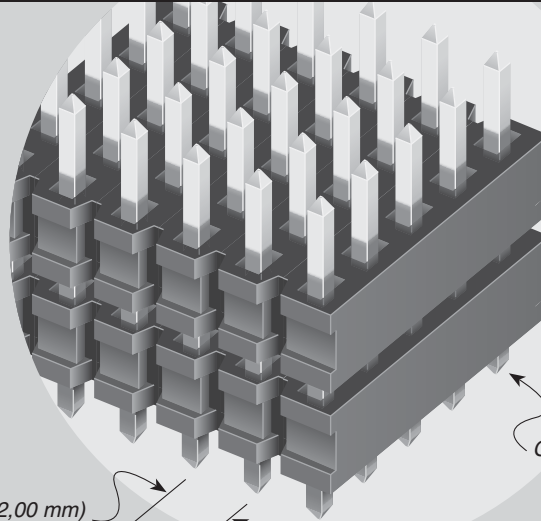

Choice of 4, 5 or 6 row

(2,00 mm)
.0787" pitch

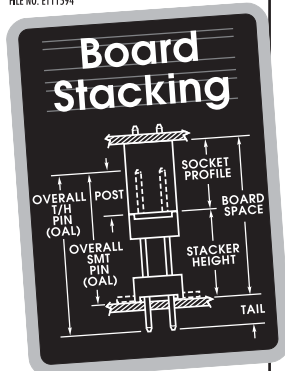


Note:
This Series is non-standard, non-returnable.

Other Solutions


2 mm Shunt
See 2SN Series.




Low Profile
See YTT & TMM Series.



Right Angle Four Row
See TMM Series.



Shrouded Four Row Vertical & Right Angle
See TMMS Series.



YTW	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	TAIL SPEC
	02 thru 50	Specify LEAD STYLE from chart below.	<p>-G = 20µ" (0,51 µm) Gold contact area, Gold flash on tail</p> <p>-S = 30µ" (0,76 µm) Gold contact area, Tin on tail (Style -01 & -02 not available)</p> <p>-L = 10µ" (0,25 µm) Gold contact area, Tin on tail</p> <p>-T = Tin</p>	<p>-Q = Four Row</p> <p>-5 = Five Row</p> <p>-6 = Six Row</p>	<p>"XXX" = Stacker Height In inches (0,13 mm) .005" increments Example: -250 = (6,35 mm) .250"</p>	<p>"XXX" = Tail Length In inches (0,13 mm) .005" increments Example: -150 = (3,81 mm) .150"</p> <p>"XXX" = Polarized Position</p>

LEAD STYLE	OAL
-01	(8,20) .323
-02	(9,60) .377
-03	(13,60) .535
-04	(14,10) .555
-05	(15,10) .594
-06	(17,10) .673
-07	(19,10) .751
-09	(11,60) .456
-10	(15,60) .614
-11	(10,08) .397

ROW OPTION	STACKER HEIGHT
-Q	(3,05) .120 MIN
-5 & -6	(4,06) .160 MIN