


D TYPE CONNECTORS LOW COST

- 9, 15, 25, 37 or 50 way
- Selective Gold Plated Contacts
- Tin Plated Metal Housing
- Current Rating - 5Amps
- Low cost
- Stamped & Formed Contacts

D TYPE CONNECTORS - SOLDER BUCKET

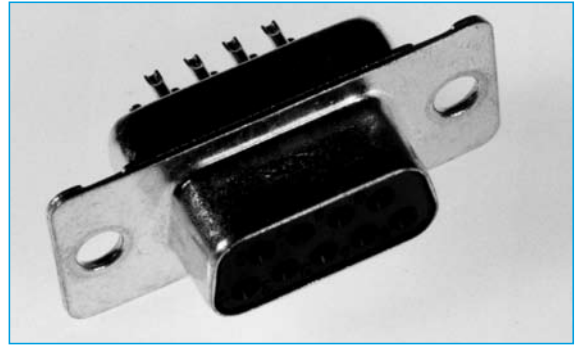

SPECIFICATION

Material:

Insulator: PBT +30% Glass Fibre
UL94V-0

Pin contacts: Phosphor Bronze
Gold Plated

Shell: Steel, SPCC
Nickel and Tin Plated

Electrical Data:

Rated Voltage: 350V AC

Rated Current: 5A


Withstand Voltage: 500V AC(rms)

Insulation Resistance: Over 1000 MΩ

Contact Resistance: 5 MΩ at 1A

Temperature: -20°C to 100°C

OUTLINE DRAWING


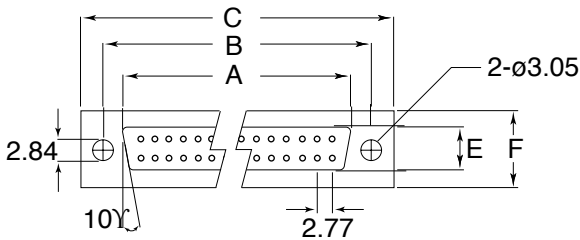


	A	B	C	D	E	F	G
9 WAY	16.90	25.00	30.80	19.30	8.40	12.50	10.70
15 WAY	25.30	33.30	39.10	27.50	8.40	12.50	10.70
25 WAY	39.00	47.00	53.00	41.30	8.40	12.50	10.70
37 WAY	55.40	63.50	69.30	57.70	8.40	12.50	10.70
50 WAY	52.80	61.10	66.90	55.30	11.10	15.40	13.60

Dimension - mm (Male)

	A	B	C	D	E	F	G
9 WAY	16.30	25.00	30.80	19.30	7.90	12.50	10.70
15 WAY	24.70	33.30	39.10	27.50	7.90	12.50	10.70
25 WAY	38.40	47.00	53.00	41.30	7.90	12.50	10.70
37 WAY	54.80	63.50	69.30	57.70	7.90	12.50	10.70
50 WAY	52.40	61.10	66.90	55.30	10.80	15.40	13.60

Dimension - mm (Female)

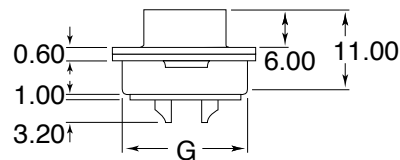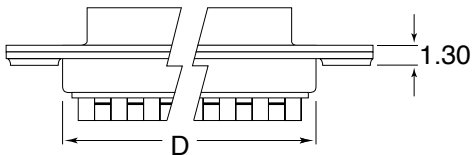

ORDERING INFORMATION

DBC	SD	M	SB	09	S
Dubilier Connectors	Series	Contact Type	Contact Style	N° of Ways	Contact plating
	SD = Stamped & Formed Pin D	M = Male(plug) F = Female(socket)	SB = Solder Bucket	09 = 9 ways 15 = 15 ways 25 = 25 ways 37 = 37 ways 50 = 50 ways	S = Selective Gold Plating