


7906 SERIES

D-SUB RIGHT ANGLE 8.07mm(0.318") TYPE

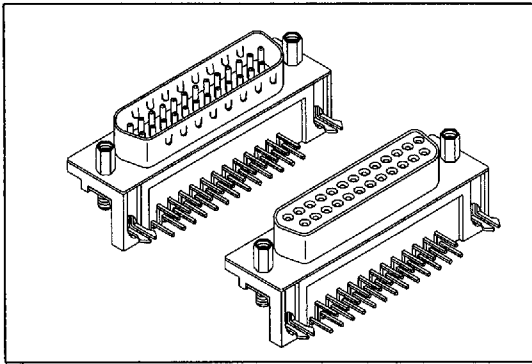

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Plating: Gold plated.

Electrical Characteristics:

Current Rating: 1 AMP.

Insulator Resistance: 5000MΩ min. at DC 500V.


Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.








Features:

- * UL cUL Listing.
- * Mates with: 7907, 7908.

Female

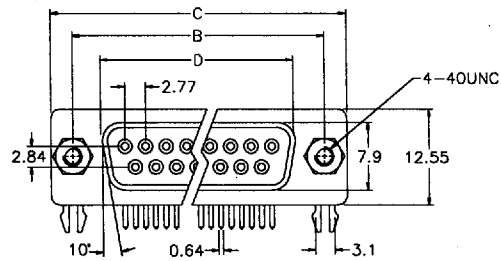

Male

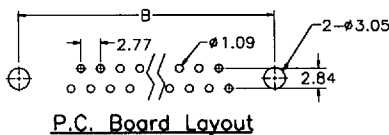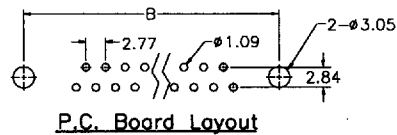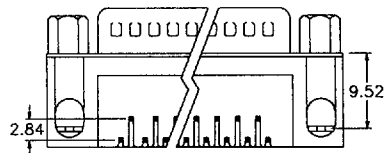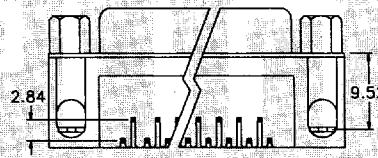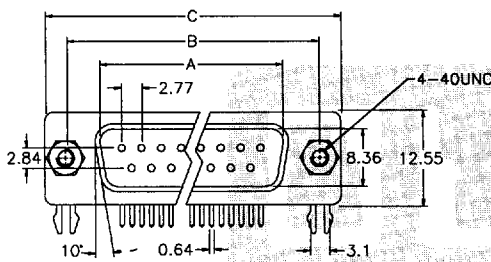

Position	Dimension			
	A	B	C	D
9	16.92	24.99	30.81	16.33
15	25.25	33.32	39.14	24.66
25	38.96	47.04	53.04	38.38
37	55.42	63.50	69.32	54.84

Ordering information

7906- 37 M A C
 Series Position M: Male A ~ Z: See Page B30 ~ B33 C: Selective Gold Plated
 F: Female